


Christie HD8K

CHRISTIE HD8K

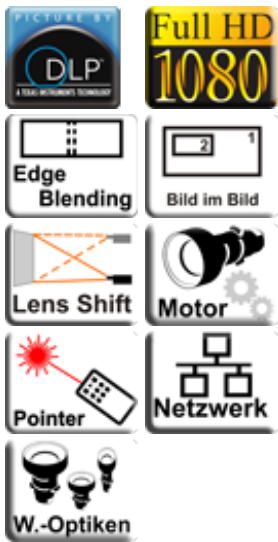

The HD8K DLP projector from Christie has 8000 Ansi-Lumen, a contrast of 1600 - 2000:1 and a HDTV 1920 x 1080 resolution. The built-in lens shift function provides freedom when setting up. Thanks to the brightness of 8000 Ansi lumens, a picture width of 909 cm is possible. The projector can also handle slightly brighter rooms with a smaller image width (we recommend max. 606 cm). If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. It was launched in 2006 and is no longer offered by the manufacturer Christie. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.

Brief Introduction

Beta 2.5

Display Type

 3 x 0,95" DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 8000

Screen 3556 Lux (bei 200 cm Screen)

Contrast

1600 - 2000:1 full on/off

1600 - 2000:1 full on/off

Black Level

5,0000 min. Lumen

2,226 min. Lumen

Lens shift

Vert.: +/-59,5% Hori.: +/-21%

HDTV 1920 x 1080

Resolution

2.073.600 Pixel

QXGA 2048 x 1536 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

1200W Xenon Lamp

Article Nr.: 003-120116-01 /

03-000834-01P

Light Life

1500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

DVI-I mit HDCP in


5 x BNC RGBHV in

S-Video in

Cinch Video in

RS232C

RS422

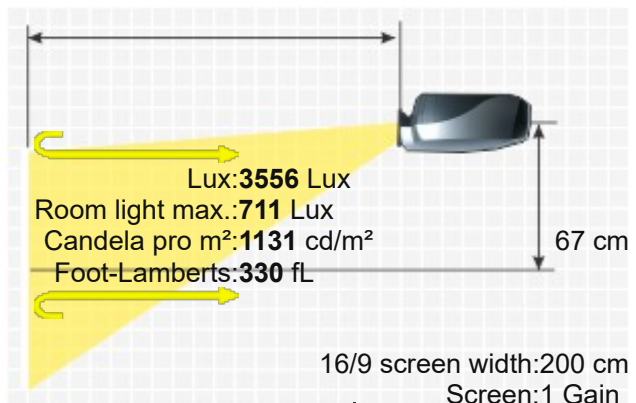

RJ45

Weitere Anschlüsse optional.



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
2000W
660 x 313 x 566 mm (26"x12,3"x22,3") 116,92 L/dm³
-

Weight
Keystone
Illumination

36,30 kg / 80,03 lbs.
-
90%

Frequenz

H-sync: 15-120 kHz
V-sync: 23,97-150 Hz

Foot-Lamberts


330 fL / max. 909 cm screen width
1131 cd/m²

Features

- Lens shift Funktion
- Freeze
- Gamma correction
- Edge Blending
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- Control via web browser
- Lan network compatible.
- Optional image warping

Screen Mirroring

-

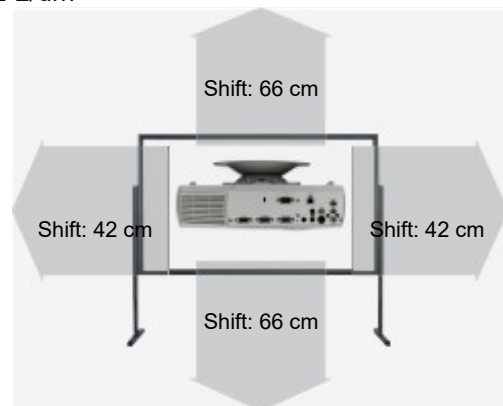

Optional accessories



Lampe Original

003-120116-01 / 03-000834-01P

EOL €



Deckenhalterung


HeavyDuty

378,28 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
4.1-6.9:1	4.22-7.02:1	8.4-14 m	+/-59.5%	+/-21%	Powered
1.8-2.6:1	1.85-2.55:1	3.7-5.1 m	+/-59.5%	+/-21%	Powered
1.4-1.8:1	1.41-1.9:1	2.8-3.8 m	+/-59.5%	+/-21%	Powered
2.6-4.1:1	2.6-4.23:1	5.2-8.5 m	+/-59.5%	+/-21%	Powered
Fix Optional Lenses					
1.2:1	1.15:1	2.3 m	+/-59.5%	+/-21%	No Zoom
0.73:1	0.73:1	1.5 m	+/-23.5%	+/-9.5%	No Zoom

Status 2006 Discontinued (EOL) // Last update of the data: 2025-03-03

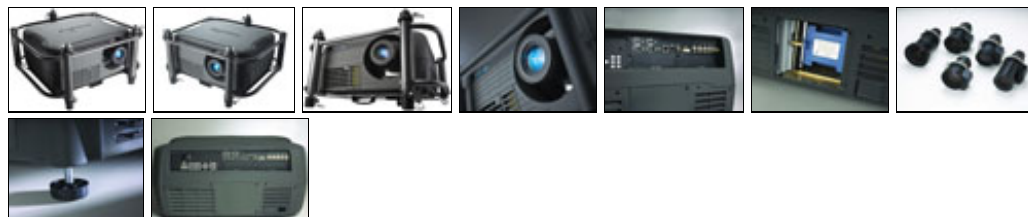

Data

More Details



HCinema

<https://www.projector-database.com/pro/chriestieh8k-en.html>

