


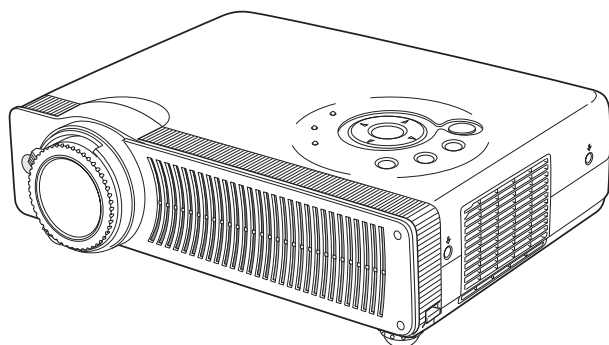

Features and Benefits

- ▶ High brightness 2500 ANSI lumens for consistent image clarity for demanding video applications
- ▶ Progressive-scan electronics with automatic 3:2 pull-down for crisp video reproduction
- ▶ Lightweight and compact - low profile installations and portability for use as shared asset
- ▶ XGA native resolution with scaling for VGA to SXGA for connection to most computers/laptops
- ▶ Short-throw lens for large images—perfect for classrooms and small conference rooms
- ▶ Intuitive GUI, single-press menu options
- ▶ Projected image/user-definable logo

INSIDE THE BOX

- ▶ Remote control keypad with mouse control, laser pointer (IR/Wired operation)
- ▶ User manual
- ▶ Computer cable, HD15 to DVI-I
- ▶ MAC/VGA adapter
- ▶ Mouse control cable (PS/2, Serial and MAC)
- ▶ Soft-sided carrying case
- ▶ Lens cover
- ▶ AC cord (UL and European)

Ordering Information/Optional Accessories:

Christie LX25	38-VIV208-01
ChristieNET™ networking module	TBD
200W UHP Replacement Lamp module	03-000754-01P
Ceiling mount	TBD
Shipping case	TBD

TECHNICAL SPECIFICATIONS

Technology	3-panel 0.8" LCD TFT p-Si Active Matrix with Micro Lens Array
Resolution	XGA 1024x768 native, supports VGA up to UXGA
Brightness	2500 ANSI lumens
Contrast Ratio	400:1 on/off
Dimensions (W x H x L)	11.7" x 2.8" x 8.4"
Weight	6.4 lbs
Power Consumption	300W maximum
Power Requirements	Universal power AC 100-240V +/- 10%, 50/60Hz
Operating Temperature	40°F to 95°F (5° to 35°C)
Onscreen Menu Languages	English, German, French, Spanish, Italian, Portuguese, Dutch, Swedish, Chinese, Korean, Japanese, Russian
Lens	Manual zoom 1.25-1.95:1
Inputs	DVI-I (HDCP compliant), HD15 (RGB, YPbPr), RCA (Composite) S-Video; 8-pin mini-DIN and USB
Outputs	Analog RGB, Stereo mini-jack
H-Sync Range	15 to 100KHz
V-Sync Range	50 to 100Hz
Dot Clock	140MHz
Audio	Stereo mini-jack (x2), RCA (L/R)
Video Compatibility	NTSC, NTSC 4.43, PAL, SECAM, PAL-M, PAL-N, 480i, 480p, 575i, 575p, 720p, 1035i, 1080i, Composite, Y/C, Y/Pb/Pr, Y/Cb/Cr
Computer Compatibility	VGA, SVGA, XGA, SXGA, MAC, SUN and SGI sources
Horizontal Resolution	HDTV compatible 800 TV lines
Aspect Ratio	Standard 4:3; wide 16:9
Image Size	40-300" diagonal
Lamp Type	200W UHP
Lamp Life	1500 hours (typical)
Networking	Optional wired/wireless
Digital Keystone	Vertical +/- 40°, horizontal +/- 20°
Fan Noise	39dB
Security	Kensington® Microsaver compatible
Approvals	UL, cUL, CSA, EMC, EMI, FCC Class B
Warranty	3 years parts and labor; 120 days/500 hours for lamp

Specifications as per published information September/03, subject to change without notice.

Copyright 2003 Christie Digital Systems, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.



www.christiedigital.com

US: 1 866 880 4462
Canada: 1 800 265-2171