


Christie Roadie 25K / LE

CHRISTIE ROADIE 25K / LE



A brief introduction to the Roadie 25K / LE: The Christie large anliç ½sse DLP projector offers 25000 Ansi lumens, a contrast of 1500:1 / 2000:1 high-contrast lens and HD2K 2048 x 1080 resolution. The projector also offers a lens shift function that makes image adjustment childs play. 25000 Ansi lumens ensure that a picture width of 1377 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 918 cm. If the image width is not sufficient, the projector offers integrated edge blending software, with which several projectors can project a large image together. The model built in 2004 is no longer offered by Christie.

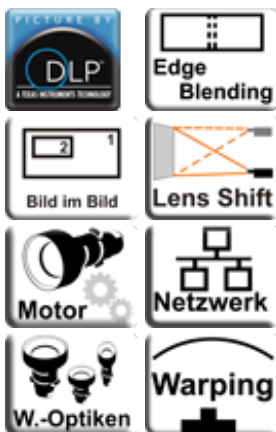

3 x 1,25" DLP Chip
HD2K 4/3 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Projector

25000 - 8000 stufenlos einstellbar

1500:1 / 2000:1 high-contrast-lens

16,6667 min. Lumen

Vert.: +/-50% Hori.: +/-17,5% motorisch max.

HD2K 2048 x 1080

2.211.840 Pixel

PAL, PAL-M, PAL-N, PAL-60, SECAM, NTSC, HDTV 720p, 1080i,

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Xenon Lamp

Article Nr.: 003-000598-02

500-1000 h.

-

Powered

Powered

optional

optional

Nein

DVI-I in

5 x BNC RGBHV

S-Video in

Cinch Video in

RS232C in

RS422 in

RJ45 in

Weitere Anschlüsse optional.


Yes, is possible.

Screen

8333 Lux (bei 200 cm Screen)

1500:1 / 2000:1 high-contrast-lens

5,566 min. Lumen

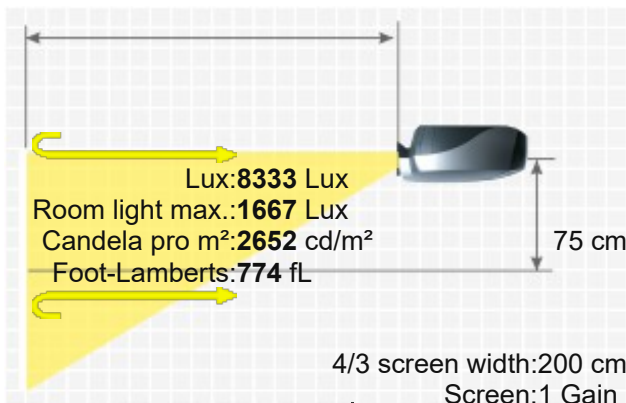

Power 7000W
Size WxHxD -
Operating Noise -


Weight 90,72 kg / 200 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-120 kHz
V-sync: 23,97-150 Hz

Foot-Lamberts 774 fL / max. 1377 cm screen width
2652 cd/m²

- Lens shift Funktion motorisch max.
- Freeze
- Gamma correction
- Warping
- Edge Blending
- Picture-in-Picture
- Password protection
- Control via web browser
- Lan network compatible.

Screen Mirroring -

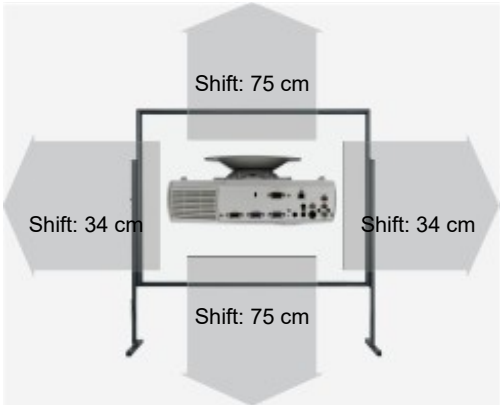

Optional accessories

	CDXL-20 Nackte Lampe (2000W) Original	003-000598-02	EOL €
	CDXL-20 Lampe (2000w) Original	003-000598-01	EOL €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Christie 5.5-8.5:1	5.64-8.72:1	11.3-17.4 m	+/- 50%	+/-17.5%	Powered
Christie 4.3-6.0:1	4.41-6.14:1	8.8-12.3 m	+/- 26.5%	+/-8.5%	Powered
Christie 3.0-4.3:1	3.07-4.35:1	6.1-8.7 m	+/- 26.5%	+/-8.5%	Powered
Christie 2.2-3.0:1	2.29-3.07:1	4.6-6.1 m	+/-26.5%	+/-8.5%	Powered
Christie 1.8-2.4:1	1.89-2.49:1	3.8-5 m	+/- 26.5%	+/-8.5%	Powered
Christie 1.45-1.8:1	1.54-1.89:1	3.1-3.8 m	+/- 26.5%	+/-8.5%	Powered
Christie 1.25-1.45:1	1.39-1.35:1	2.8-2.7 m	+/- 50%	+/-17.5%	Powered

Fix Optional Lenses

Christie 1.0:1	1.17:1	2.3 m	+/-37%	+/-10.5%	No Zoom
----------------	--------	-------	--------	----------	---------

Status 2004 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/christieroadie25k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.