

Christie Roadie 4K25



CHRISTIE ROADIE 4K25



Brief Introduction

Beta 2.5

The Roadie 4K25 DLP projector from Christie has 22500 Ansi lumens, a contrast of 2000:1 and a UHD (4K+2K) 4096 x 2160 resolution. Including a lens shift function, which provides freedom during installation. An image width of up to 1377 cm is possible as the projector has 22500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 918 cm. Video signals 1080P and 4K are also no problem for the projector. The projector was launched in 2014 and is no longer sold by the manufacturer.

Display Type



3 x 1,38" DLP Chip

UHD 19/10 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 22500 / mit 3.0kW CDXL-30SD Lampe

Screen 10667 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

11,2500 min. Lumen

5,339 min. Lumen

Lens shift

Vert.: +/-56% Hori.: +/-19%

Resolution

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

3.0kW CDXL-30SD / 3.0kW CDXL-30 /

2.0kW CDXL- Lamp

Light Life

1500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections

2 x Ddual 3G HD-SDI input card

2 x Twin display port input Card

RS232C

RJ45 in

Ceiling Mounting

Yes

Power

-

Size WxHxD

1298 x 587 x 652 mm (51,1"x23,1"x25,7") 496,78 L/dm³

Operating Noise

-

Weight

131,00 kg / 288,81 lbs.

Keystone

-

Illumination



-

Frequenz

-

Foot-Lamberts

991 fL / max. 1377 cm screen width
3395 cd/m²

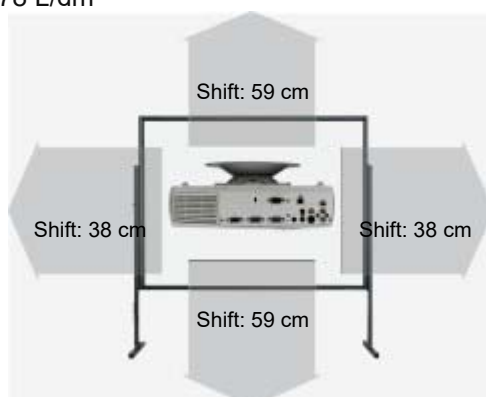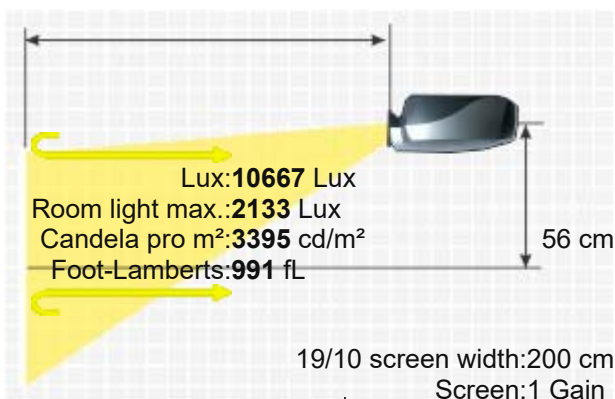

- Full HD 1080P compatible
- Lens shift Funktion
- Lan network compatible.

Features

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
5.43:1 -7.69:1	5.43-7.69:1	10.9-15.4 m	+/-56%	+/-19%	Powered
3.89-5.43:1	2.89-5.43:1	5.8-10.9 m	+/-13%	+/-4%	Powered
2.71-3.89:1	2.71-3.89:1	5.4-7.8 m	+/-13%	+/-4%	Powered
1.98-2.71:1	1.98-2.71:1	4-5.4 m	+/-13%	+/-4%	Powered
1.63-2.17:1	1.63-2.17:1	3.3-4.3 m	+/-13%	+/-4%	Powered
1.31-1.63:1	1.31-1.63:1	2.6-3.3 m	+/-13%	+/-4%	No Zoom
1.13-1.31:1	1.13-1.31:1	2.3-2.6 m	+/-56%	+/-19%	Powered
Fix Optional Lenses					
1.0:1	1:1	2 m	+/-29%	+/-9%	No Zoom
0.72:1	0.72:1	1.4 m	0.00% Fix		No Zoom

Status Data2014 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/christieroadie4k25-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.