

Dukane ImagePro 6780UL-W

DUKANE IMAGEPRO 6780UL-W



Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Dukane ImagePro 6780UL-W laser LCD projector has 8000 ANSI lumens, a contrast ratio of 3000000:1 dynamic contrast, and a WUXGA 1920 x 1200 resolution.

3 x LCD Panel
WUXGA 16/9 Liquid Crystal Display

8000
3000000:1 Dynamic Contrast
0,0027 min. Lumen
Vert.: +50% -10% Hori.: +/-20%
WUXGA 1920 x 1200
2.304.000 Pixel
UHD (4K+2K) 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Dual Blue Laser
20000 h.

0,00 € Laser

Powered

Powered

optional

optional

-


2x HDMI 2.0 (HDCP 1.4/2.2)
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
Mini Jack Audio out
USB in
RS232C Din 9 pin in
RJ45 in
HDBaseT

Yes, is possible.


520W Normal / 468W Eco

503 x 168 x 411 mm (19,8"x6,6"x16,2") 34,73 L/dm³

42 / 32 dB in Eco Mode

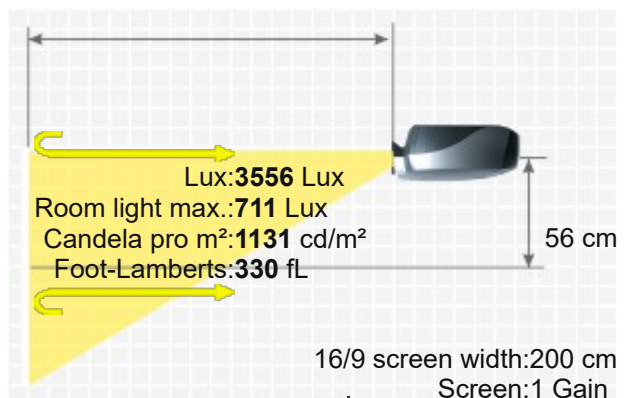

Weight 11,20 kg / 24,25 lbs.
Keystone Vert.: +/-30°
Hori.: +/-40°
Illumination -
Frequenz -
Foot-Lamberts 330 fL / max. 744 cm screen width
1131 cd/m²
Features
■ Full HD 1080P compatible
■ Lens shift Funktion
■ Eco Mode
■ Kensington Slot
■ 360° installable
■ Lan network compatible.
■ Crestron®-Software compatible.
■ AMX
■ Geometric Correction (Spheres, Cylinders, Corner, Angles)
Screen Mirroring -

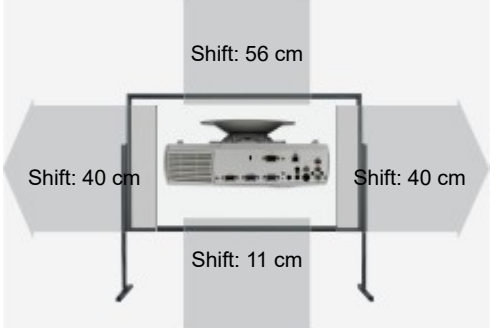

Optional accessories

 Deckenhalterung Länge 225 mm Halterung45 83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
XP-43ZL/NP43ZL	2.99-5.93:1	598-1186 m	+/-50%	+/-20%	Powered
XP-41ZL/NP41ZL	1.3-3.02:1	260-604 m	+/-50%	+/-20%	Powered
XP-50ZL/NP50ZL	0.6-1.75:1	120-350 m	+/-50%	+/-20%	Powered
XP-40ZL/NP40ZL	0.79-1.11:1	158-222 m	+/-50%	+/-20%	Powered
XP-44ML/NP44ML	0.32:1	64 m	+/-50%	+/-20%	No Zoom

Status 2026 Current model // Last update of the data: 2026-03-02
Created: 2026-02-18 11:21:55



More Details



HCinema
<https://www.projector-database.com/pro/dukaneimagepro6780ulw-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.