


Dukane ImagePro 6782UL-B-L

DUKANE IMAGEPRO 6782UL-B-L

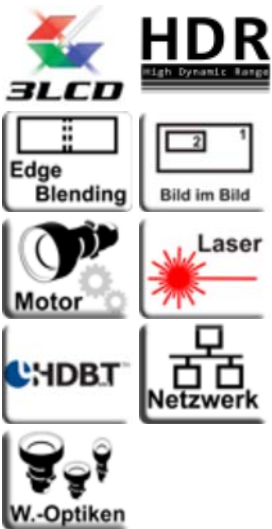

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The Dukane model ImagePro 6782UL-B-L is an LCD projector with WUXGA 1920 x 1200 resolution and a contrast of 3000000:1. The projector can illuminate up to 920 cm image width with its 8200 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 613 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. It is also Full HD 1080P and 4K (compressed) compatible. With only 30 decibels of operating noise, the model is already very quiet compared to others.



3 x 0,76" LCD w/ MLA
WUXGA 16/9 Liquid Crystal Display with Micro Lense Array

Projector

8200
3000000:1
0,0027 min. Lumen

Screen

3644 Lux (bei 200 cm Screen)
3000000:1
0,001 min. Lumen

- WUXGA 1920 x 1200

2.304.000 Pixel
UHD (4K+2K) 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser phosphor

-

0,00 € Laser

Powered


Powered 2,4x

optional

optional

-

2 x HDMI V2.0 /W HDCP (V1.4/2.2)
1 x DisplayPort /W HDCP (V.13)
1 x HDBaseT (V1.4/2.2)
1 x Audio minijack IN/OUT
1 x RJ45 Network
1 x Dsub-15pin

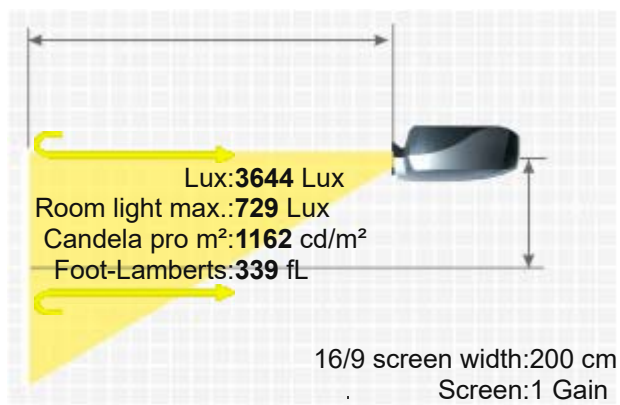



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
-
60 x 22 x 49 mm (2,4"x0,9"x1,9") 0,06 L/dm³
30 / 28 dB in Eco Mode

Weight
Keystone
Illumination

24,10 kg / 52,91 lbs.
-
-

Frequenz

-

Foot-Lamberts

339 fL / max. 920 cm screen width
1162 cd/m²

Features

- Full HD 1080P compatible
- Eco Mode
- High Dynamic Range (HDR)
- Edge Blending
- Picture-in-Picture
- Lan network compatible.

Optional

- Object lens original NP14ZL / 60003221
- Object lens original NP13ZL / 60003217
- Object lens original NP12ZL / 60003220
- Object lens original NP11FL / 60003222
- Object lens original 100014645 / NP43ZL
- Object lens original 100014473 / NP41ZL
- Object lens original 100014472 / NP40ZL

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1059>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP43ZL	2.99-5.93:1	6-11.9 m	50-10%	+/-30%	Powered
NP41ZL	1.3-3.02:1	2.6-6 m	50-10%	+/-30%	Powered
NP40ZL	0.79-1.11:1	1.6-2.2 m			Powered
NP14ZL	2.9-4.64:1	5.8-9.3 m	50-10%	+/-30%	Powered
NP13ZL	1.46-2.95:1	2.9-5.9 m	50-10%	+/-30%	Powered
NP12ZL	1.16-1.52:1	2.3-3 m	50-10%	+/-30%	Powered
Fix Optional Lenses					
NP11FL	0.79:1	1.6 m			No Zoom

Status 2020 Current model // Last update of the data: 2023-08-04
Created: 2021-07-26 15:35:41

Data





HCinema

<https://www.projector-database.com/pro/dukaneimagepro6782ulbl-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.