

Dukane ImagePro 68100WUSS /-B /-L /-LB



Brief Introduction

A brief introduction to the Dukane ImagePro 68100WUSS /-B /-L /-LB. The DLP laser projector has a WUXGA 1920 x 1200 resolution and a contrast of 10000:1. The service life is 20000 hours due to the laser, which converts to over 13.7 years at 4 hours per day. The integrated lens shift gives freedom when positioning the projector. 1016 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, we recommend a maximum of 677 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Furthermore, the projector can play 1080P and 4K (compressed) as well as 3D without any problems, and thus all currently offered Blu-ray formats can be recognized by the projector. This model is no longer offered by Dukane, but is still very popular in our projector database.

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections



1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Projector

10000

10000:1 full on/off

1,0000 min. Lumen

Vert.:

+50% -30% Hori.: +/-15%

WUXGA

1920 x 1200

2.304.000

Pixel

HD4K

4096 x 2160 compressed

Pal,

SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p,

576p

Frame-Packing

(Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential

(3D Ready)

Event |

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

20000 h.

0,00 €

Laser

Powered

Powered

optional

optional

Nein

HDMI in

D-sub 15pin in

5 x BNC RGBHV in

BNC Video in

USB Typ A in

RS232C Din 9 pin in

RJ45 in

HDBaseT in


3Pin D

Screen

4444 Lux (bei 200 cm Screen)

10000:1 full on/off

0,445 min. Lumen

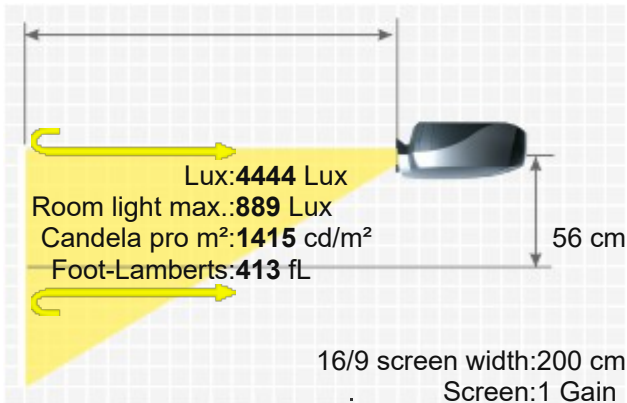



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
1400W
500 x 216 x 583 mm (19,7"x8,5"x23") 62,96 L/dm³
40 / 35 dB in Eco Mode

Weight
Keystone
Illumination

29,00 kg / 63,93 lbs.
Vert.: +/-40°
Hori.: +/-40°
-

Frequenz

H-sync: 15-100 kHz
V-sync: 48-120 Hz

Foot-Lamberts

413 fL / max. 1016 cm screen width
1415 cd/m²


- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Lens shift Funktion
 - Freeze
 - Blackboard Modus
 - Eco Mode
 - Kensington Slot
 - 360° installable
 - 24/7 continuous operation capable
 - Edge Blending
 - Picture-in-Picture
 - PJLink™
 - Lan network compatible.
 - Crestron®-Software compatible.
 - Modell B und LB sind mit schwarzem Gehäuse.
 - Modell L und LB sind mit Linse (NP18ZL).

Screen Mirroring

-

Please note

Model B and LB are with black housing.
Model L and LB are with lens (NP18ZL).

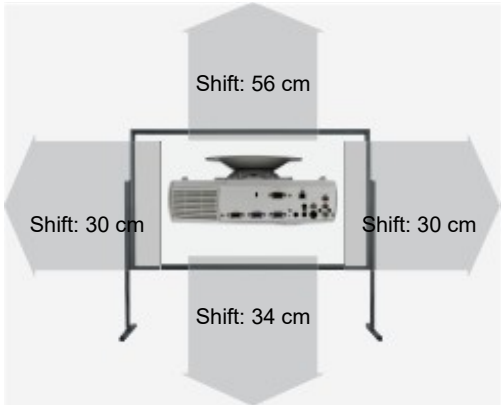

Optional accessories

	Objektiv Original	100014968 / NP31ZL	5.206,21 €
	Objektiv Original	100014132 / NP39ML	6.451,12 €
	Objektiv Original	60003227 / NP19ZL	3.292,04 €
	Objektiv Original	NP16FL / 60003216 / 100014962	EOL €
	Objektiv Original	NP20ZL / 60003228	3.292,04 €
	Objektiv Original	NP17ZL / 60003225	4.450,81 €
	Objektiv Original	NP18ZL / 60003226	1.714,62 €
	Objektiv Original	NP31ZL / 100013387	3.587,30 €
	Objektiv Original	NP21ZL / 60003229	3.292,04 €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP31ZL	0.79-0.98:1	1.6-2 m			Powered

NP21ZL	5.3-8.3:1	10.6-16.6 m	50-30%	+/-15%	Powered
NP20ZL	3.6-5.4:1	7.2-10.8 m	50-30%	+/-15%	Powered
NP19ZL	2.22-3.67:1	4.4-7.3 m	50-30%	+/-15%	Powered
NP18ZL	1.73-2.27:1	3.5-4.5 m	50-30%	+/-15%	Powered
NP17ZL	1.25-1.79:1	2.5-3.6 m	50-30%	+/-15%	Powered

Fix Optional Lenses

NP39ML	0.38:1	0.8 m			No Zoom
NP16FL	0.76:1	1.5 m			No Zoom

Status 2016 Discontinued (EOL) // Last update of the data: 2025-03-03
 Created: 2017-05-11 15:27:57

Data

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro68100WUSS-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.