

# Dukane ImagePro 7010



## Brief Introduction

Beta 2.5

## Display Type

## Ansi-Lumen

## Contrast

## Black Level

## Offset

## Resolution

## Video Modes

## Application

## Light Source

## Light Life

## Operating Costs

## Focus

## Zoom

## Objective

## Throw Ratio

## Audio

## Connections

## Ceiling Mounting

## Power

## Size WxHxD

## Operating Noise

## Weight

## Keystone

## Illumination

## Frequenz

## Foot-Lamberts

## Features

## In Test

## Status

The Dukane ImagePro 7010 LCD projector has 300 Ansi lumens, a contrast of 100:1 and a VGA 640 x 480 resolution. An image width of up to 151 cm is possible as the projector has 300 Ansi lumens. However, if room light is available, the image should be max. 101 cm wide. This model is no longer offered by Dukane.



3 x 1,3" LCD TFT Panel

VGA 4/3 Liquid Crystal Display

Projector

300

100:1 full on/off

3,0000 min. Lumen

Screen

97 Lux (bei 203 cm Screen)

100:1 full on/off

1 min. Lumen

VGA 640 x 480

307.200 Pixel

NTSC, PAL, SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

250W Metalldampf Lamp

Articel Nr.: I-PRO 7010

2000 h.

-

Powered

Powered

-

-

1W Mono

S-Video: (1) Mini DIN 4-pin

Video: (1) RCA jack

D-sub 15pin in

-

360W

307 x 165 x 360 mm (12,1"x6,5"x14,2") 18,24 L/dm<sup>3</sup>

-

-

Vertical

-

H-sync: 15,0-35,0 kHz

V-sync: 50-70 Hz


9 fL / max. 151 cm screen width

31 cd/m<sup>2</sup>

-

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

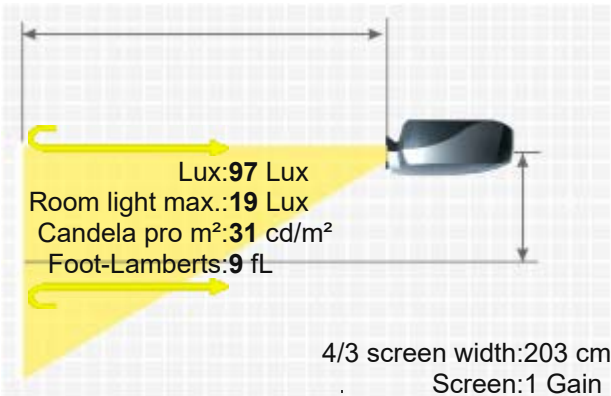

DUKANE IMAGEPRO 7010

More Details



# HCinema

<https://www.projector-database.com/pro/dukaneimagepro7010-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.