

Dukane ImagePro 7250



The standard portable ImagePro 7250 LCD projector from Dukane has 435 Ansi lumens, a contrast of 200:1 and an SVGA 800 x 600 resolution. As Dukane specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. The projector will be able to illuminate a picture width of 182 cm well. If room light is available, however, the picture width should ideally not exceed 121 cm. It is no longer offered by the manufacturer Dukane.



1 x 6,5" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Projector

435 500 Lumen
200:1 full on/off
2,1750 min. Lumen

Screen

141 Lux (bei 203 cm Screen)
200:1 full on/off
0.716 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

SVGA 800 x 600

480.000 Pixel

NTSC/PAL/SECAM; Composite und S-Video

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

330W Metall Halide Lamp

Articel Nr.: 456-212

1000 h.

Manual

3W Stereo

(1) D-sub 15pin

(1) D-sub 15pin out

(1) RCA Video in,

(1)S-Video

(2) RCA Audio in für Video,

(2) RCA für Computer in

(2) RCA out

(1) Maus Control Port

420W


6,50 kg / 14,33 lbs.

-

-

-

13 fL / max. 182 cm screen width
45 cd/m²

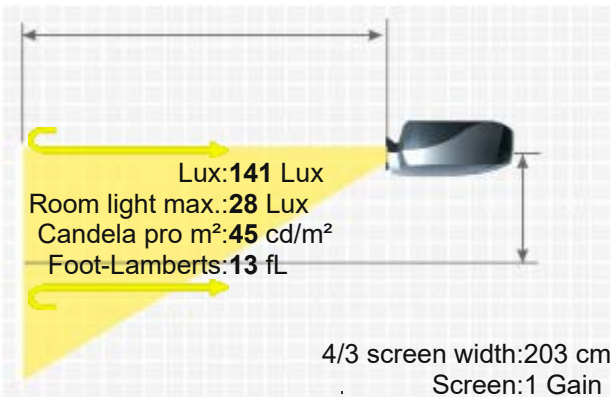

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro7250-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.