




ImagePro 8070 Portable LCD Projector

- 2000 lumen brightness
- SVGA resolution
- Easy to transport, only 6.4 lbs.
- Full set of features, 2 video inputs & 2 computer inputs
- HDTV compatible
- Monitor loopthrough
- Switched Audio Output
- Automatic Keystone Correction

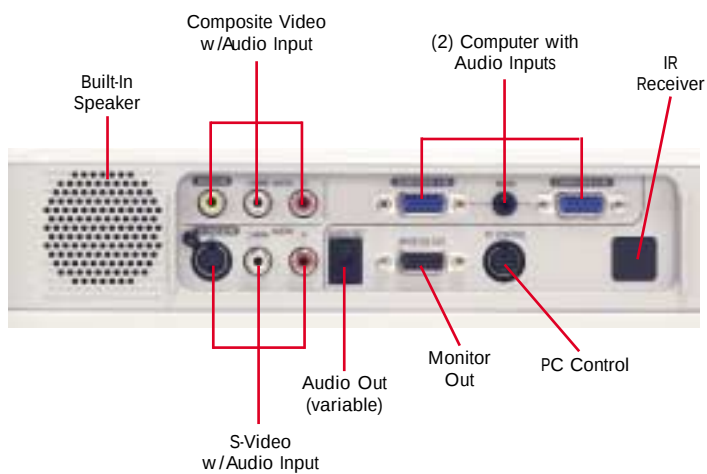

8070

DUKANE

ImagePro 8070

Premium-quality LCD projector

The Dukane ImagePro 8070 is an ultra-portable projector that makes presentation setup fast and easy. Automatic keystone correction, one touch source selection, and color coded cables will ensure a confident carefree presentation every time.

This full-featured LCD projector is ideal for class-rooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.



Key features:

- SVGA (800 x 600) resolution
- 2000 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 6.4 lbs.
- Flexibility with 2 computer and 2 video inputs
- Full function remote with mouse/cursor control
- Audio output switches with selection of either video or computer source
- HDTV compatible
- "Silent Running" so you hear only your message
- Automatic vertical keystone correction
- Three Year Warranty and One Year Peace of Mind Service

8070 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min	Max
Inches	Inches	Inches	Inches
30	24	34.1	41.6
60	48	69.7	84.6
80	64	93.4	113.2
100	80	117.1	141.9
120	96	140.8	170.6
150	120	176.3	213.6
200	160	235.6	285.2
300	240	354.1	428.5

Throw ratio 1.5-1.8:1 (distance:width)

Specifications

Image Element	0.7" polysilicon TFT x3, MLA
Brightness	2000 ANSI lumens (1600 lumens in Whisper Mode)
Resolution	800 x 600 pixels (H X V), SVGA
Contrast	400 to 1
Scanning Frequency	fh 15-100 kHz, fv 50-120 Hz
Lens	Manual zoom, 1.2X Optical
Lens Throw Ratio	1.5 -1.8 to 1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg, Automatic
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 576p, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	IR remote mouse receiver, USB to PC
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	180W , 150W in whisper mode
Lamp Life	2000 hours, 3000 in whisper mode
Audio	1 speaker , 1 watt
Throw Distance	29" to 430"
Screen Size, diagonal	21" to 300"
Inputs, Video	S-video, Min DIN 4-pin, with L/R RCA Audio, Composite video, RCA x 1, with L/R RCA Audio
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin with stereo mini audio
Outputs Monitor	15 pin, D-sub
Inputs, Control	PC control DIN 8 pin
Outputs Audio	Stereo mini jack (variable audio out)
Security	Kensington slot
Fan Level	35 dB, Ultra quiet 30dB in Whisper Mode
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, AC200-240V 50/60 Hz, 250W (normal), 200W (whisper), 8W standby
Size (WxHxD)	11.6" x 3.7" x10.2"
Weight	6.4 lbs.
Shipping Weight	12.6 lbs.
Carton Size	14.7" x 11" x 17.3"
Accessories Included	Remote control, batteries, power cord, computer cable, remote mouse receiver, operator's manual and soft carry case
Safety	UL/CSA, FCC Class B
Optional Accessories	Lamp 456-8767A Rolling briefcase; 185-406, Ceiling mount, universal; PJF-UNV-S

DUKANE

Audiovisual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av



Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

Three (3) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

Includes Dukane's FREE 1 year
Peace-of-Mind Loaner Program.

3YR