

Fully featured ultra short throw
LCD projector with network capabilities
and a low operating cost all in a
portable design.



Key Features

- WXGA 1280 x 800 resolution
- 3,000 ANSI lumens white/color output
- 4000:1 contrast ratio
- 4,000 hours hybrid filter*
- 2,500 hours lamp life (Standard mode) and 4,000 hours lamp life (Eco mode)**
- ImageCare technology
- Wireless compatible

Dukane's 8109W ultra short throw LCD projector combines an array of advanced features in a compact, portable design perfectly suited for classrooms of any size. Small in size, but big on performance, the 8109W provides vibrant image quality, cost-effective operation, and long-lasting reliability. The 8109W incorporates a cloning function which enables you to copy configuration settings from one projector to others of the same model via USB memory. Plus, Dukane's Intelligent Eco Mode with ImageCare combines optimal picture performance with energy savings for a lower total cost of ownership. For added peace of mind, Dukane's 8109W is also backed by a generous warranty and our world-class service and support programs.

8109W

DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av



UNIQUE FEATURES

Drawing Function with Optional Tablet (TB-1)



The optional Dukane wireless tablet and pen allows you to engage your audience by annotating over images shown on the projector.

Cloning Function



Copy configuration settings from one projector to others of the same model via USB memory. Cloning can save almost all PJ settings such as gamma and keystone via USB memory.

ImageCare Technology



ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.

Intelligent Eco and Saver Modes



Automatically changes the brightness of the lamp according to the brightness level of the screen. Also, automatically changes the brightness of the lamp if there is no change in the screen image. Using ImageCare technology, these features give optimal picture performance with maximum energy savings.

Perfect Fit 2



Enables the user to adjust individual corners and sides independent of one another. Perfect Fit 2 provides vertical and horizontal digital correction of either barrel or pin cushion distortions. This feature helps correct geometric and complicated distortions. Perfect Fit 2 allows the projected image to fit correctly to the screen quickly and easily.

Tabletop Presentation



Make any tabletop a projection screen using the optional tabletop stand. Ideal for a small group environment or in a room with limited space.


STANDARD FEATURES

Display via USB



Simply plug and play using the USB port instead of the 15-pin D-sub VGA cable. Also offers video and sound transfer from PC to projector.

Input Source Naming



Users can name input sources in simple language instead of factory default name.

Microphone Input



A microphone can be used via the jack located on the input panel. Allows for more dynamic presentations even in standby mode.

Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.

PC-Less Presentation



By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. Additionally there is also a slideshow and video function.

PIN Lock / MyScreen / MyText



PIN lock protection can limit projector users. MyScreen PIN lock keeps captured images on the startup screen. Users can set any name logo to MyScreen, clearly identifying ownership. MyText provides the ability to write text on the startup screen such as model name, serial number or location.

PJMessenger



PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.

Present Content via LAN



Dukane's suite of networking software allows you to easily send content directly from your PC to the projector via your LAN connection.

Serial Number and Media Access Control Label



A label is affixed to the front of the projector to more easily access and read the model name and serial number while mounted in ceiling use. This is a convenience for installers, end user and auditors for instant accessibility.

Template Function



Line templates in the projector menu can help when writing on a whiteboard. There are four types of line templates to choose from.

Wireless Presentation Ready



You can use a wireless network by connecting the projector to a computer using the optional USB wireless adapter part number USBWL11N. The adapter supports IEEE802.11b/g and the latest 11n.

DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av

* Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

** Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

8109W LCD Projector

DUKANE

Enhance the educational experience with Dukane's 8109W.

The 8109W ultra short throw LCD projector from Dukane is specifically designed to enhance the educational experience — for students and teachers. Leading edge projector technology helps stimulate the imagination of students of all ages and makes lessons become more interesting, compelling and memorable. Vivid colors. Bold graphics. Crisp text. The 8109W



does it all in classrooms of all sizes. With 3,000 ANSI lumens brightness and WXGA 1280 x 800 resolution, the 8109W provides the perfect solution. It also features a high contrast ratio, long lamp life, cloning function enabling you to copy configuration settings from one projector to others of the same model, and is wireless presentation ready. Plus, embedded networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and email alerts). Best of all, the high performance 8109W is exceptionally reliable and offers a lower cost of ownership.



3LCD Technology



Closed Captioning




5 Year Warranty



Front 3/4 View



Top View

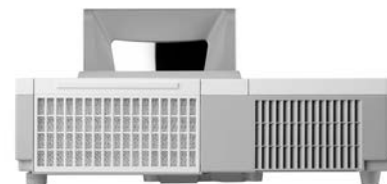


Rear View



Right Side Profile

Input/Outputs

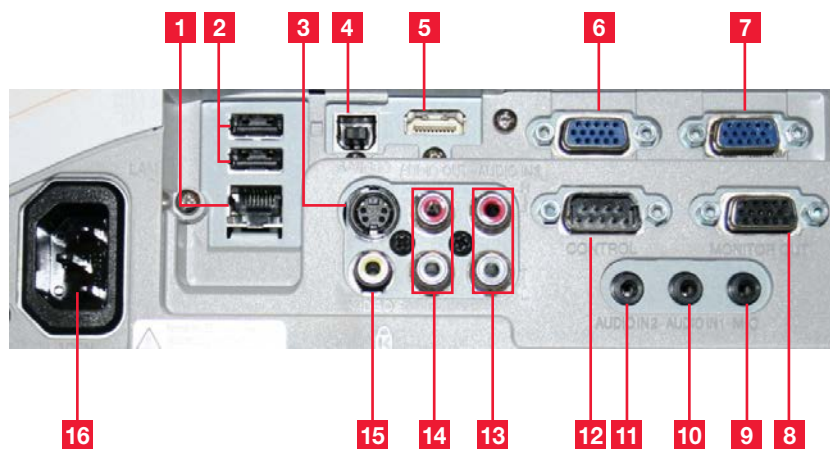

1. LAN
2. USB Type A x 2
3. S-Video
4. USB Type B
5. HDMI

6. Computer in 2
7. Computer in 1
8. Monitor Out
9. Microphone Input
10. Audio in 1
11. Audio in 2

12. Control (RS-232C)
13. Audio in 3
14. Audio Out
15. Composite Video
16. AC In

DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av

8109W

8109W LCD Projector



Accessories

Supplied Accessories	Remote control, power cord, computer cable, user's manual, network manual
Optional Accessories	UST1WALLARM, A3WALLARM, TT-251 tabletop stand, USBWL11N - USB wireless adapter

Replacement Parts

Lamp	456-8109W
Remote Control	HL02882
Filter	UX37191

Projection Throw Chart (In inches)

Screen Size 16:10		Throw Distance
Diagonal	Distance from leading edge of projector to screen	Distance from mirror to screen
60	4.7	16.8
70	7.4	19.5
80	10.1	22.1
90	12.8	24.8
100	15.4	27.5

Throw Ratio: (distance : width)
0.1 : 1 from edge of projector
0.3 : 1 from mirror

Specifications

Display	Projection Technology	3LCD, 3 chip technology
	Resolution	WXGA - 1280 x 800
	White Light Output	3,000 ANSI lumens
	Color Light Output	3,000 ANSI lumens
	Colors	16.7 million colors
	Aspect Ratio	Native 16:10 / 16:9 and 4:3 compatible
	Contrast Ratio	4000 : 1 (using active IRIS)
Lens & Operation	Throw Ratio (distance : width)	0.1 : 1 from edge of projector to screen 0.3 : 1 from mirror to screen
	Lens	F = 1.8, f = 4.1 mm
	Lamp Wattage	250W
	Expected Lamp Life*	Approximately 2,500 hours (standard mode) 4,000 hours (Eco mode)
	Expected Filter Life**	Approximately 4,000 hours
	Speaker Output	16W
	Acoustic Noise Level	37 dB (30 dB in Eco mode)
Compatibility	Keystone	H and V: +/- 5°
	Computer	VGA, SVGA, XGA, WXGA, WXGA+/SXGA/WSXGA+/UXGA (compressed), MAC 16"
	H-Sync	31.5 kHz - 106 kHz
	V-Sync	56 Hz - 120 Hz
	Composite Video	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	Component Video	480i, 480p, 576i, 720p, 1080i, 1080p
	HDMI	480i, 480p, 576i, 720p, 1080i, 1080p, computer signal TMDS clock 27 MHz - 150 MHz
Connectors	Digital Input	HDMI x 1 (HDCP compliant)
	Computer Input 1	15-pin mini D-sub x 1
	Computer Input 2	15-pin mini D-sub x 1
	Computer Monitor Output	15-pin mini D-sub x 1
	Video Input	
	S-Video	Mini DIN 4-pin x 1
	Composite Video	RCA jack x 1
	Component Video	15-pin mini D-sub x 2, (shared with computer in 1/2)
	Audio Input	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1, MIC-in 3.5 mm mini jack x 1
	Audio Output	RCA jack (L/R) x 1
Ratings & Warranty	Network LAN Wired	RJ-45 port (10 base-T / 100 base-TX)
	Network LAN Wireless	USB-A, IEEE802.11 b/g/n - optional wireless adapter required
	USB	Type A x 2 (PC-less presentation, wireless adapter) Type B x 1 (USB display or mouse control)
	Control Terminals	9-pin mini D-sub x 1 (RS-232 control)
	Power Supply	AC100-120V / AC220-240V, 50/60Hz
	Power Consumption	370W
	Operating Temperature	32°F - 104°F (0°C - 40°C)
	Dimensions (W x D x H)	13.6" x 11.9" x 3.4" (excl. protruding parts) / Shipping 19" x 17" x 9"
	Weight	approx. 8.4 lbs. / Shipping 19 lbs.
	Approvals	UL 60950-1 / cUL FCC Part 15 subpart B Class B
UPC	Warranty	Five (5) year limited warranty plus Dukane's 1 year Peace of Mind Loaner Program
		605194002863

* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

** Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

8109W

DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av