

Dukane ImagePro 8753



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

The Dukane ImagePro 8753 LCD projector has 1100 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. An image width of up to 289 cm is possible as the projector has 1100 Ansi lumens. However, if room light is available, the picture should be max. 193 cm wide. This model is no longer offered by Dukane.

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector 1100
400:1 full on/off
2,7500 min. Lumen
Screen 356 Lux (bei 203 cm Screen)
400:1 full on/off
0.897 min. Lumen

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed
NTSC, PAL, SECAM, S-Video
Standard-Portabel | External training and company presentations, as well as product presentations.
Small screen width, rooms with very little ambient light below 100 lumens.

132W UHP Lamp
Articel Nr.: 456-222
2000 h.

Manual

Manual 1,3

-

-

2 x 1W

(1) Min DIN 4-pin, S-Video
(1) RCA, composite Video
(1) Signal; D-sub 15pin
(1) Audio, Stereo mini jack, PC
Output (1) Monitor 15 pin, D-sub
Control (1) PS/2, / RS232C (8 pin) Maus (1)USB (B-type) Maus

Yes

200W

-

34dB


-

-

-

H-sync: 15-100 kHz
V-sync: 43-130 Hz

33 fL / max. 289 cm screen width

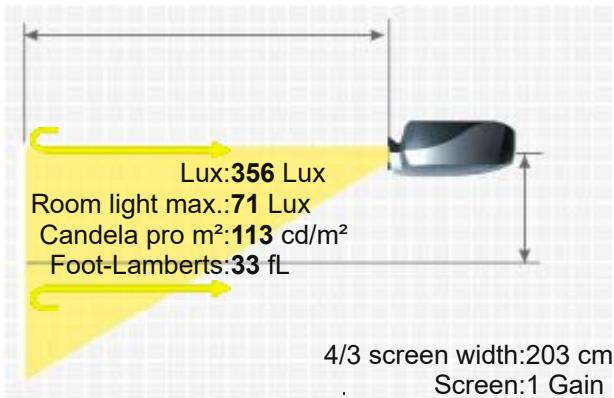

113 cd/m²

■ Freeze

■ Eco Mode

■ Remote control with mouse control

- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8753-en.html>

Features

Status
Data

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.