




## ImagePro 8755D Portable LCD Projector

- 2000 lumen brightness
- XGA resolution
- Lamp access on top & filter access in front
- Easy to transport, only 6.2 lbs.
- Monitor loopthrough
- Remote mouse control
- HDTV ready

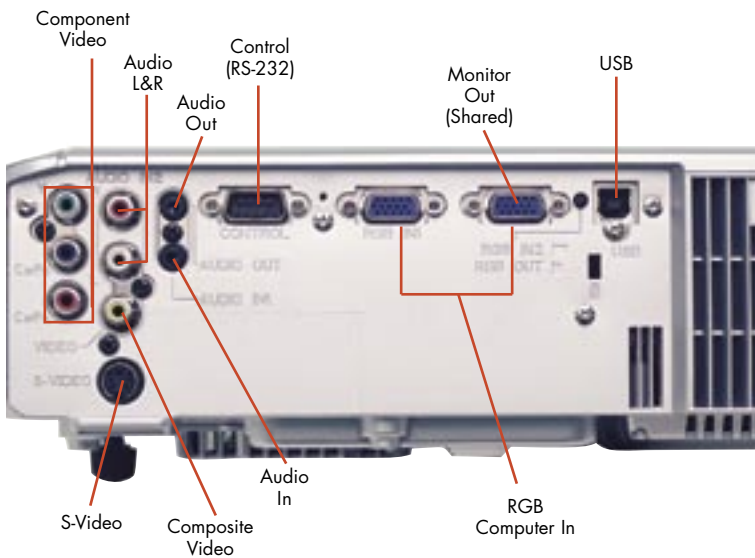

# 8755D DUKANE

# ImagePro 8755D

## Portable LCD projector

The ImagePro 8755D is a portable LCD projector that can be used in a variety of applications. With sufficient brightness for most classrooms and conference rooms the 8755D is designed to be reliable and easy to maintain.

Lamp and filter access points are conveniently located and new security options make this projector a wise multimedia investment.



### Key features:

- XGA (1024 x 768) resolution
- 2000 ANSI lumens of brightness
- Easy maintenance in ceiling mount with lamp access on top & filter access in front
- Monitor loopthrough & remote mouse control
- Individual Audio - Source Assignment
- "Instant Off" Capability
- "Custom Image" for your startup and blank screens
- "Whisper Mode" so you hear only your message
- Vertical keystone correction
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8755D Projection Table

| Image Size 4:3 |        | Throw Distance |      |
|----------------|--------|----------------|------|
| Diagonal       | Width  | Min.           | Max. |
| Inches         | Inches | Feet           | Feet |
| 30             | 24     | 3.0            | 3.6  |
| 60             | 48     | 6.1            | 7.3  |
| 80             | 64     | 8.1            | 9.8  |
| 100            | 80     | 10.2           | 12.2 |
| 120            | 96     | 12.2           | 14.7 |
| 150            | 120    | 15.3           | 18.3 |
| 200            | 160    | 20.3           | 24.5 |
| 300            | 240    | 30.6           | 36.8 |

Throw Ratio (distance to width), 1.53 - 1.83

# DUKANE

Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
Toll-free: 800-676-2485  
Fax: 630-584-5156  
avsales@dukcorp.com  
www.dukcorp.com/av



#11688-J-05

ImagePro is a registered trademark of Dukane Corporation

## Specifications

|                                |                                                                                       |
|--------------------------------|---------------------------------------------------------------------------------------|
| Image Element                  | 0.6" polysilicon active-matrix TFT x3                                                 |
| Brightness                     | 2000 ANSI lumens<br>(1600 lumens in Whisper Mode)                                     |
| Resolution                     | 1024 x 768 pixels (H X V), XGA                                                        |
| Contrast                       | 400:1                                                                                 |
| Scanning Frequency             | fh 15-91 kHz, fv 50-120 Hz                                                            |
| Lens                           | Manual zoom (F1.7 - 1.9), 1.2X                                                        |
| Lens Throw Ratio               | 1.52:1 - 1.86:1 throw distance to image width                                         |
| Keystone Correction            | Digital, vertical +/-15 deg                                                           |
| Aspect Ratio                   | 4:3, 16:9 selectable                                                                  |
| Computer Compatibility         | SVGA, VGA, XGA, SXGA, UXGA<br>Compressed PC and MAC13" and MAC16"                     |
| Video Compatibility            | NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i, 720p, 576i, 480i/p)            |
| Component Video, Image Control | Freeze function, electronic magnification and pan                                     |
| Mouse Control                  | Using USB                                                                             |
| Projection Modes               | Front/rear/ceiling                                                                    |
| Color Reproduction             | 24 bit (16.7 million)                                                                 |
| Lamp                           | 180W UHB                                                                              |
| Lamp Life                      | 2000 hours (typical)                                                                  |
| Audio                          | 1 speaker 1 watt                                                                      |
| Throw Distance                 | 36" to 441"                                                                           |
| Screen Size, diagonal          | 30" to 300"                                                                           |
| Inputs, Video                  | (1) Component, RCA x 3<br>(1) S-video, Mini DIN 4-pin<br>(1) Composite video, RCA x 1 |
| Inputs, Computer               | (2) RGB, 15 pin D-sub                                                                 |
| Inputs, Audio                  | (1) Stereo mini jack (for RGB)<br>(1) RCA x 2 (for video)                             |
| Outputs, Audio                 | (1) Stereo mini jack                                                                  |
| Outputs, Monitor               | RGB, 15 pin D-sub (share with RGB2 input)                                             |
| Outputs, Control               | RS-232, 9 pin D-sub<br>USB Mouse control                                              |
| Security                       | Kensington lock slot & Security Bar                                                   |
| Fan Level                      | 38dB, ultra quiet<br>33dB in Whisper Mode                                             |
| Operating Temperature          | 32-95 deg F                                                                           |
| Power                          | AC 100-120V, AC 220-240V<br>50/60 Hz, 290 watt                                        |
| Size (WxHxD)                   | 12.0" x 3.4" x 9.8"                                                                   |
| Weight                         | 6.2 lbs.                                                                              |
| Shipping Weight                | 16 lbs.                                                                               |
| Carton Size                    | 16" x 14" x 12"                                                                       |
| Accessories Included           | Remote control, batteries, power RGB cable, operators manual and soft carry case.     |
| Safety                         | UL/C-UL, FCC Class B, CE                                                              |
| Optional Accessories           | Lamp 456-8755D<br>Ceiling Mount, Universal; RPA-U                                     |

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply).Includes

# 5YR