




ImagePro 8766 Portable Powerful LCD Projector

- 1700 lumen brightness
- XGA resolution
- Easy to transport, only 6 lbs.
- Full set of features, 3 inputs
- Monitor loopthrough
- Switched audio output
- Automatic keystone correction
- Wide angle zoom lens

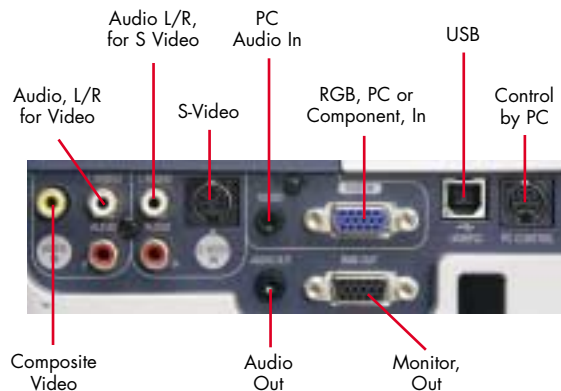

8766 DUKANE

ImagePro 8766

Quality XGA LCD projector

The Dukane ImagePro 8766 is a projector that can be easily moved around while still providing higher image brightness and features to make your class or presentation easy. It is simple to use, transport, and can be setup in a minute.

This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.



Key features:

- True XGA (1024 x 768) resolution
- 1700 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 6 lbs.
- Flexibility with 1 computer and 2 video inputs
- Full function remote with mouse/cursor control
- Audio output switches with selection of either video or computer source
- Wide angle zoom lens permits closer placement to the screen
- "Silent Running" so you hear only your message
- Automatic vertical keystone correction
- Peace of Mind Service

8766 Image Size Distance Table

Image Size 4:3		Throw Distance		
Diagonal	Width	Min.	Max.	a*
Inches	Inches	Feet	Feet	Inches
40	32	3.9	4.7	2.3
60	48	5.9	7.1	3.5
100	80	10.0	12.0	5.8
120	96	12.0	14.4	7.0
150	120	15.1	18.1	8.7
210	168	21.1	25.3	12.2
300	240	30.2	36.3	17.4

a* = Distance Below Lens Center line.

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485 or 2486
630-584-5156
avsales@dukcorp.com
www.dukcorp/av.com

toll-free
fax
e-mail

ImagePro is a registered trademark of Dukane Corporation
#11622-B-04

Specifications

Image Element	0.7" polysilicon TFT x3, MLA
Brightness	1700 ANSI lumens (1400 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	400 to 1
Scanning Frequency	fh 15-100 kHz, fv 50-120 Hz
Lens	Manual zoom f21.6 to 25.9mm, 1.2X
Lens Throw Ratio	1.5 -1.8 to 1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg, Automatic
Aspect Ratio	4:3, 16:9, with 4 modes selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 1080i/50 Hz, 720p, 576p, 480i/p
Component Video, Image Control	Horizontal res, 800TV line Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	205 W, 160W in whisper mode
Lamp Life	2000 hours, 3000 in whisper mode
Audio	1 speaker, 1 watt
Throw Distance	29" to 432"
Screen Size, diagonal	21" to 300"
Inputs, Video	Component, D-sub 15 pin, shared S-video, Min DIN 4-pin, Composite video, RCA x 1
Inputs, Computer	Audio, Stereo, RCA x 2, for C-video Audio, Stereo, RCA x 2, for S-video RGB Signal: D-sub, 15 pin, shared Audio, Stereo mini jack for PC
Outputs Monitor	15 pin, D-sub
Outputs, Control	PC control DIN 8 pin, RS-232 Audio out, Stereo mini jack USB Type B, mouse control
Security	Kensington slot and code word
Fan Level	Ultra quiet 27dB in Whisper Mode
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 90-120V, AC 220-240V 50/60 Hz, 260 watt, 7.5W standby
Size (WxHxD)	12.2" x 3.5" x 9.1"
Weight	6.5 lbs.
Shipping Weight	12.6 lbs.
Carton Size	14.7" x 11" x 17.3"
Accessories Included	Remote control, batteries, power cord, Computer cable, USB cable, operator's manual and soft carry case.
Safety	UL/CSA, FCC/DOC Class B, CE
Optional Accessories	Lamp 456-8766 Rolling briefcase; 185-406, Ceiling mount, universal; PJF-UNV-S

Two (2) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

2YR