




ImagePro 8768 Portable LCD Projector

- 3000 lumen brightness
- XGA resolution
- Easy to transport, only 7.9 lbs.
- Full connectivity
- PC card slot
- Monitor loopthrough
- Switched audio output
- Automatic keystone correction
- Lamp access on top for convenient replacement in ceiling mounted applications
- Enhanced security features

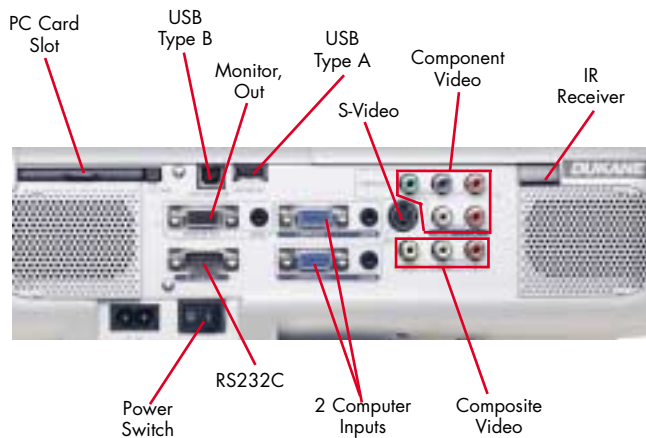

8768 DUKANE

ImagePro 8768

Powerful LCD projector

The Dukane ImagePro 8768 is a bright powerful projector that makes presentation setup fast and easy. automatic keystone correction, one touch source selection, and color coded input panel will ensure an impressive presentation every time.

This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.



Key features:

- XGA (1024 x 768) resolution
- 3000 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 7.9 lbs.
- Flexibility with 2 computer and 3 video inputs
- Monitor loopthrough
- Full function remote with mouse/cursor control
- Audio output switches with selection of either video or computer source
- Enhanced security features
- HDTV Compatible
- "Silent Running" so you hear only your message
- Automatic vertical keystone correction
- Lamp access on top of projector for easy changing in ceiling mounted applications
- Two year warranty and One year Peace-of-Mind service

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
800-676-2485 or 2486
630-584-5156
avsales@dukcorp.com
www.dukcorp/av.com

toll-free
fax
e-mail



ImagePro is a registered trademark of Dukane Corporation
#11632-D-04

Specifications 8768

Image Element	0.8" polysilicon TFT x 3, MLA
Brightness	3000 ANSI lumens (2300 in whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	400:1
Scanning Frequency	fh 15-100 kHz, fv 50-120 Hz
Lens	Manual zoom and focus F1.7-2.0
Lens Throw Ratio	1.5 -1.8:1 throw distance to image width
Keystone Correction	Digital, vertical +/-40 deg, automatic, horizontal +/- 35 deg
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 1080i/50 Hz, 720p, 576p, 480i/p
Component Video, Image Control	Comp, horz res, 570TV line Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W AC
Lamp Life	2000 hours, 3000 in whisper mode
Audio	2 speakers, 5 watt
Throw Distance	28" to 430"
Screen Size, diagonal	25" to 300"
Inputs, Video	(1) Component, RCA x 3 w/ L/R Audio (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 (1) Audio, Stereo, RCA x 2, for C-video shared (1) Audio, Stereo, RCA x 2, for S-video shared
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin (2) Audio, Stereo mini jack for PC (1) PC Card slot
Outputs Monitor	15 pin, D-sub
Outputs, Control	PC control DIN 8 pin, RS-232 Audio out, Stereo mini jack USB Type A & B
Security	Kensington slot and password protection
Fan Level	35 dB, 30 dB in whisper mode
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC200-240V 50/60 Hz, 280 watt
Size (WxHxD)	13.4" x 4.2" x 10.2"
Weight	7.9 lbs.
Shipping Weight	14.0 lbs.
Carton Size	14" x 11" x 18"
Accessories Included	Remote control, RGB cable, power cord, USB cable, operators manual, CD and soft carry case.
Safety	UL/CUL, FCC Class B
Optional Accessories	Lamp 456-8768 Ceiling mount, universal; PJF-UNV-S

Two (2) year limited warranty on parts and labor in North America,
lamp excluded (for other locations, local warranties apply). Includes
Dukane's FREE 1 year Peace-of-Mind Loaner Program.

2YR