




ImagePro 8776-W Portable LCD Projector

- 2500 lumen brightness
- XGA resolution
- Wired, RJ-45 and Wireless 802.11 Network Capability
- Lamp access on top & filter access in front
- Easy to transport, only 7.2 lbs.
- Monitor loopthrough
- Remote mouse control
- HDTV ready
- Built-In Anti-theft security
- USB Type A and SD card slot

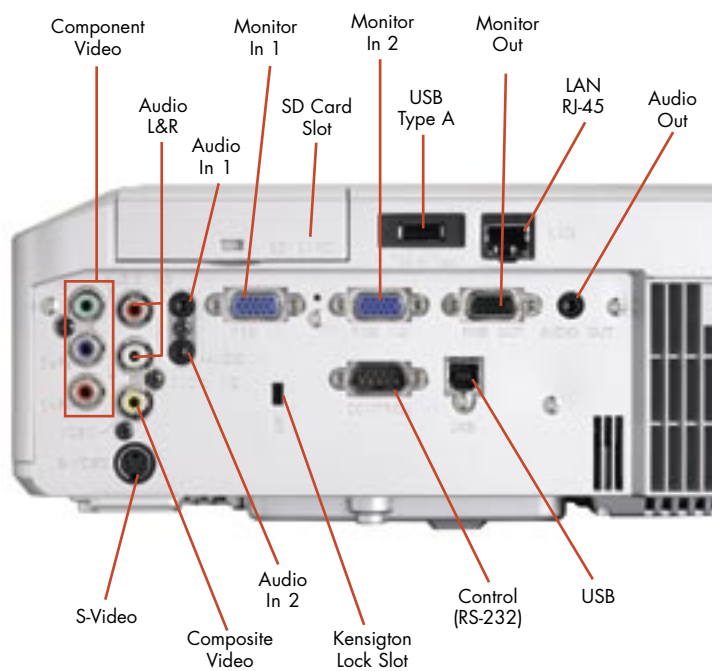

8776-W

DUKANE

ImagePro 8776-W

Portable LCD projector

The ImagePro 8776-W is a portable LCD projector that can be used in a variety of applications. With sufficient brightness for most classrooms and conference rooms the 8776-W is designed to be reliable and easy to maintain.

Lamp and filter access points are conveniently located and new security options make this projector a wise multimedia investment. Show your images easily with the convenient SD card slot & USB flash reader.



Key features:

- XGA (1024 x 768) resolution
- 2500 ANSI lumens of brightness
- Wired, RJ-45 and Wireless 802.11 Network Capability
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & filter access in front
- USB Type A and SD card slot
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Built-In Anti-theft security
- Input source naming
- Auto Vertical keystone correction
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8776-W Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width), 1.46 1.75

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 800-676-2485
Fax: 630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av



#11726-K-06

ImagePro is a registered trademark of Dukane Corporation

Specifications

Image Element	0.63" polysilicon active-matrix TFT x3
Brightness	2500 ANSI lumens (2000 lumens in Whisper Mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	500:1
Scanning Frequency	fh 15-106 kHz, fv 50-120 Hz
Lens	Manual zoom (F1.7 - 1.9), 1.2X
Lens Throw Ratio	1.46 - 1.75:1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA, UXGA Compressed PC and MAC13" and MAC16"
Video Compatibility	NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i, 720p, 576i, 480i/p)
Component Video, Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W UHB
Lamp Life	2000 hours (typical) 3000 hours (whisper mode)
Audio	1 speaker 1 watt
Throw Distance	34" to 423"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1 (1) USB Type A and (1) SD card slot
Inputs, Computer	(2) RGB, 15 pin D-sub
Inputs, Audio	(2) Stereo mini jack (1) RCA x 2 (for video)
Outputs, Audio	(1) Stereo mini jack
Outputs, Monitor	RGB, 15 pin D-sub
Outputs, Control	RS-232, 9 pin D-sub USB Mouse control
Network Connection	RJ-45 port/100 Base-T, Wireless 802.11 b/g
Security	Kensington lock slot & Security Bar
Fan Level	39dB, ultra quiet 34dB in Whisper Mode
Operating Temperature	41-95 deg F
Power	AC 100-120V, AC 220-240V 50/60 Hz, 330 watt
Size (WxHxD)	12.0" x 4.2" x 9.8"
Weight	7.2 lbs.
Shipping Weight	18 lbs.
Carton Size	19" x 10" x 15"
Accessories Included	Remote control, batteries, power cord, RGB cable, RCA video cable, operators manual and soft carry case.
Safety	UL/C-UL, FCC Class B, CE
Optional Accessories	Lamp 456-8776

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR