

Dukane ImagePro 8800A



DUKANE IMAGEPRO 8800A



Brief Introduction

Beta 2.5

The Dukane ImagePro 8800A standard portable LCD projector has 2000 Ansi lumens, a contrast of 200:1 and an XGA 1024 x 768 resolution. The projector can illuminate a picture width of up to 389 cm thanks to its 2000 Ansi lumens. In room light, however, the image width should ideally be less than 259 cm. The model is no longer offered by Dukane.

3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

2000

200:1 full on/off

10,0000 min. Lumen

-

XGA 1024 x 768

786.432 Pixel

NTSC, PAL, SECAM, NTSC 4.3

Standard-Portabel | External training and company presentations, as well as product

presentations.

Medium screen width or rooms with little light, max. 100 lumens.

190W UHB Lamp

Articel Nr.: 456-206

2000 h.

-

Powered

Powered 1,3

F=1,7-2,3

-

2 x 2W Stereo

Inputs:

Inputs:

Dual 15 Pin VGA, S-Video,

Component Video,

Audio für video **Outputs:**

15 Pin Monitor out,

1 audio stereo mini jack

Yes

320W

-

-

5,90 kg / 13,01 lbs.

Vertical

-

H-sync: 25-80 kHz

V-sync: 56-120 Hz


60 fL / max. 389 cm screen width

647 Lux (bei 203 cm Screen)

200:1 full on/off

3.285 min. Lumen

-

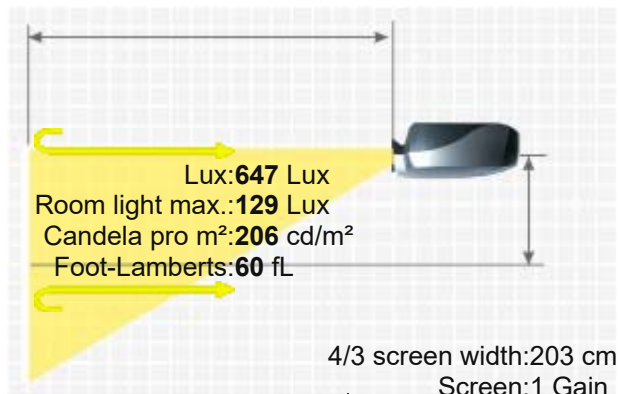

206 cd/m²

- Freeze
 - Blank (Black screen button)
 - Digital image shift
 - Remote control with laser pointer und mouse control
- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8800a-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.