

Dukane ImagePro 8808



Brief Introduction

Beta 2.5

The stationary Dukane ImagePro 8808 LCD projector has 4000 Ansi lumens, a contrast of 800:1 and an XGA 1024 x 768 resolution. The projector also offers an integrated media player for direct playback of files. The integrated lens shift gives freedom when positioning the projector. An image width of up to 551 cm is possible, if the image width is smaller (we recommend max. 367 cm), rooms with residual light are also no problem. The projector was launched in 2008 and is no longer sold by the manufacturer.

 3 x 0,8" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

Projector 4000 / 3300 im Eco Mode

Screen 1333 Lux (bei 200 cm Screen)

Contrast

800:1 full on/off

800:1 full on/off

Black Level

5,0000 min. Lumen

1,673 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10% manuell

XGA 1024 x 768

Resolution

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: JPEG, BMP, PNG, GIF

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

280 / 252W NSH Lamp

Articel Nr.: 456-8806

Light Life

2000 h. 3000 h. inEco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,33

Objective

F=1,7-2,2 f=24,4-32,5 mm

Throw Ratio


1,5-2,0:1

Audio

2 x 5W Stereo

Connections

DVI-D mit HDCP in
D-sub 15pin in und out
5 x BNC RGBHV in
YUV in
S-Video in
Cinch Video in
2 x Cinch Stereo in 1 x out
RJ45in
PCMCIA Slot Type-2
RS232C D-sub15pin
USB Typ A
Mini Jack in

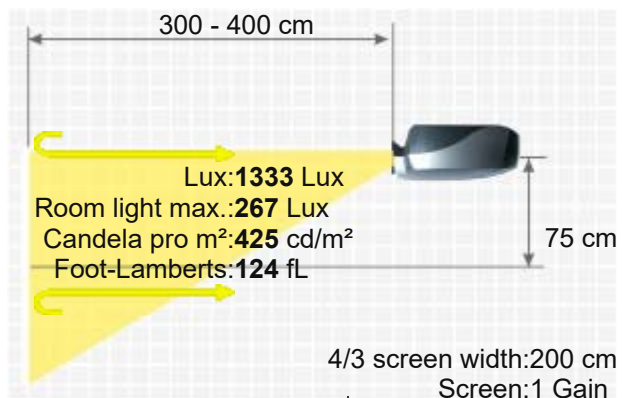




Ceiling Mounting Yes
 Power 435 / 365W in Eco Mode
 Size WxHxD 399 x 150 x 358 mm (15,7"x5,9"x14,1") 21,43 L/dm³
 Operating Noise 35 / 30 dB in Eco Mode

Weight 7,30 kg / 16,09 lbs.
 Keystone Vert.: +/-40°
 Illumination Hori.: +/-35°
 -

Frequenz H-sync: 15-100 kHz
 V-sync: 48-120 Hz

Foot-Lamberts 124 fL / max. 551 cm screen width
 425 cd/m²

- Direkt Power Off
 - Lens shift Funktion manuell
 - Integrated Mediaplayer
 - Freeze
 - Blackboard Modus
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Gamma correction
 - Warping
 - Password protection
 - Remote control with laser pointer
 - PJLink™
 - Control via web browser
 - Optional Wi-Fi network compatible.
 - Lan network compatible.
 - Overscan adjustable
 - 3D Reform
 - Auto colour correction,
 - remote control with mouse control,
 - 3-fold security system,
 - 4-fold digital zoom,
- Please note Prospekt englisch ist fehlerhaft.

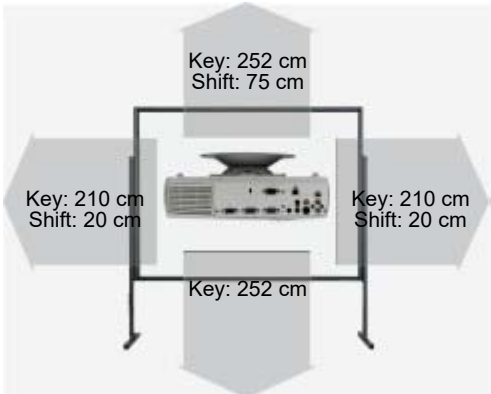

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
NP05ZL	4.62-7.02:1	9.2-14 m	50%	+/-10%	Manual
NP04ZL	2.98-4.77:1	6-9.5 m	50%	+/-10%	Manual
NP03ZL	1.94-3.07:1	3.9-6.1 m	50%	+/-10%	Manual
NP02ZL	1.18-1.54:1	2.4-3.1 m	50%	+/-10%	Manual
Fix Optional Lenses					
NP01FL	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2008 Discontinued (EOL) // Last update of the data: 2023-08-04





HCinema

<https://www.projector-database.com/pro/dukaneimagepro8808-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.