





ImagePro 8918 LCD Projector

- 3500 lumen brightness
- XGA resolution
- Network capability, RJ-45
- Lamp access on top & high performance filter on side
- Horizontal & vertical lens shift
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- HDTV ready

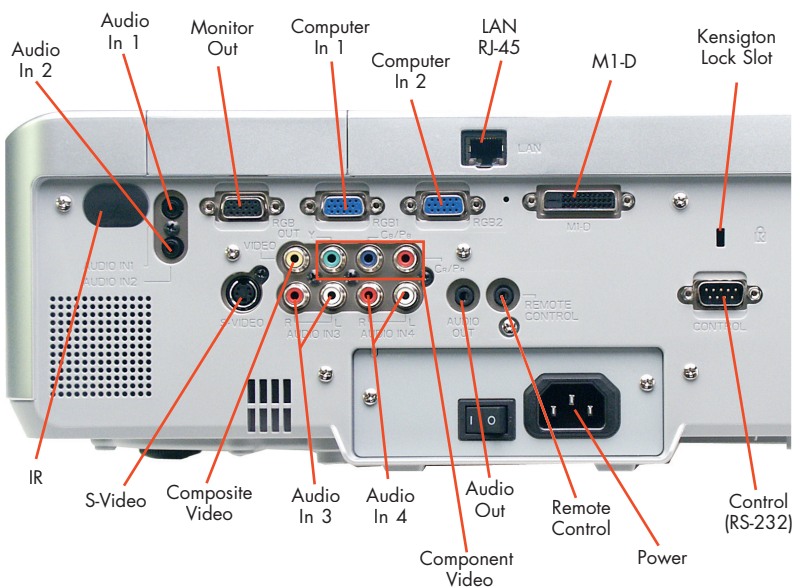

Manual Horizontal
& Vertical Lens Shift

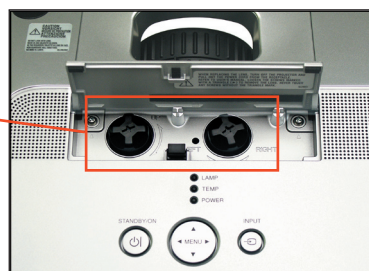


8918 DUKANE

ImagePro 8918

LCD projector

The ImagePro 8918 is a LCD projector that can be used in a variety of applications. With sufficient brightness for most classrooms and conference rooms the 8918 is designed to be reliable and easy to maintain.

Lamp and filter access points are conveniently located and Kensington™ lock slot and our new security bar makes this projector secure and a wise multimedia investment.



Key features:

- XGA (1024 x 768) resolution
- 3500 ANSI lumens of brightness
- Network Capability, RJ-45
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & filter access on side
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- Input source naming
- Horizontal & vertical lens shift
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8918 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width), 1.46 1.75

DUKANE

Dukane Corporation
Audio Visual Products Division
2900 Dukane Drive
St. Charles, Illinois 60174
Toll-free: 800-676-2485
Fax: 630-584-5156
avsales@dukcorp.com
www.dukcorp.com/av



#070029

ImagePro is a registered trademark of Dukane Corporation

Specifications

Image Element
Brightness
Resolution
Contrast
Scanning Frequency
Lens

Lens Throw Ratio
Keystone Correction

Aspect Ratio
Computer
Compatibility
Video Compatibility

Image Control

Mouse Control
Projection Modes
Color Reproduction
Lamp
Lamp Life
Audio
Throw Distance
Screen Size, diagonal
Inputs, Video

Inputs, Computer

Outputs Monitor
Outputs Audio
Control

Network
Security
Fan Level
Operating Temperature
Power

Size (WxHxD)
Weight
Carton Size
Shipping Weight
Accessories Included

Safety

Optional Accessories

Optional Lenses

FL601 Short fixed, throw Ratio 0.8
SL602 Short 1.7 zoom, throw ratio 1.2 to 2.0
LL603 Long 2.0 zoom, throw ratio 1.9 to 3.9
UL604 Long 1.8 zoom, throw ratio 3.9 to 7.4

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

8918

0.8" polysilicon TFT x3
3500 ANSI lumens, 2800 (whisper mode)
1024 x 768 pixels (H X V), XGA
1000:1
fh 15-91 kHz, fv 50-120 Hz
Manual zoom (F=1.7 to 2.1), 1.2X.
Horizontal & vertical lens shift
1.5 -1.8 :1 throw distance to image width
Digital vertical & horizontal +/-40 deg.
& +/-20 deg.
4:3 native, 16:9 selectable
VGA, SVGA, XGA, SXGA, SXGA+ and
UXGA Compressed, MAC13", MAC16"
NTSC, NTSC 4.43, PAL, PAL-M, PAL-N,
SECAM, HDTV 1080i, 720p, 576i,
480i/p

Freeze function, electronic
magnification and pan

Using M1-D
Front/rear/ceiling
24 bit (16.7 million)
285W UHB
2000 hours (3000 hours Whisper Mode)

4W x 4 speakers

35" to 436"

30" to 300"

(1) Component, RCA x 3
(1) S-video, Min DIN 4-pin,
(1) Composite video, RCA x 1
Audio, Stereo, RCA x 2, (L/R)
(2) RGB Signal: D-sub, 15 pin
(1) M1-D

(2) Audio, Stereo mini jack x 2
15 pin, D-sub

Audio, Stereo mini jack x 1
9 pin D-sub Connector, RS232
M-1 (for USB remote mouse only)
3.5mm mini stereo jack (wired remote)
RJ-45 port / 100Base-T
Kensington slot, Security bar, PIN lock
35dB, (28dB in whisper mode)
41 to 95 deg. F (5-35 deg C)
AC 100-120V, AC220-240V
50/60 Hz, 460 watt

16.5" x 5.5" x 12.6"

15.6 lbs.

21" x 14" x 19"

25 lbs.

Remote control, batteries (AA & Li),
power cord, RGB cable, security label,
operator/safety manual.

UL60950, C-UL, FCC Part15,
Class B, CE, EN60950

Lamp 456-8943, Ceiling mount,
universal; RPA-U; Filter MW03642

5YR