

Dukane Image Pro 8918

DUKANE IMAGE PRO 8918



The Image Pro 8918 LCD projector from Dukane has 3500 Ansi lumens, a contrast of 1000:1 in theater mode and an XGA 1024 x 768 resolution. The projector also offers a lens shift function that makes image adjustment child's play. The projector can illuminate images up to 515 cm wide thanks to its 3500 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 343 cm. The projector was launched in 2007 and is no longer sold by the manufacturer.



3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

3500 / 2800 im Eco Mode
1000:1 full on/off im Theatre Mode
3,5000 min. Lumen
Vert.: +41% -0% Hori.: +/-10% manuell
XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed

Screen

1167 Lux (bei 200 cm Screen)
1000:1 full on/off im Theatre Mode
1,171 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

285W UHB Lamp
Articel Nr.: 456-8943

2000 h.

-

Manual


Manual 1,2

F=1,7-2,1 f=24,3-29,2 mm

1,5-1,8:1

4 x 4W

1 x DVI M1DA
2 x D-sub 15En in 1 x out
YUV in
S-Video in
Cinch Video in
Cinch Stereo in
Mini Jack in und out
RJ45

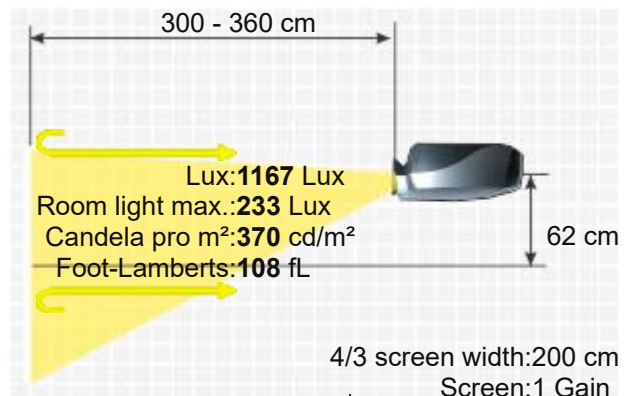



Ceiling Mounting Yes
 Power 460W
 Size WxHxD 418 x 139 x 319 mm (16,5"x5,5"x12,6") 18,53 L/dm³
 Operating Noise 35 / 28 dB in Eco Mode


Weight 7,00 kg / 15,43 lbs.
 Keystone Vert.: +/-40°
 Hori.: +/-20°
 Illumination -

Frequenz H-sync: 31,5-106 kHz
 V-sync: 56-120 Hz

Foot-Lamberts 108 fL / max. 515 cm screen width
 370 cd/m²

- Direkt Power Off
- Lens shift Funktion manuell
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Dynamic iris
- Password protection
- Remote control with laser pointer und mouse control
- Control via web browser
- Lan network compatible.
- Overscan adjustable
- De-interlacer with 3:2 pull down..

Features

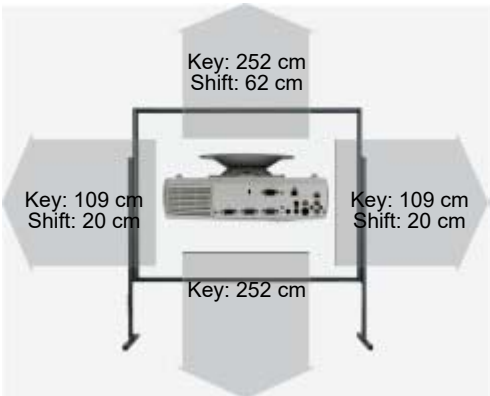

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
UL-604	3.9-7.4:1	7.8-14.8 m	41%	+/-10%	
SL-602	1.2-2:1	2.4-4 m	41%	+/-10%	Manual
LL-603	2-3.9:1	4-7.8 m	41%	+/-10%	Manual
Fix Optional Lenses					
FL-601	0.8:1	1.6 m	0.0% Fix		No Zoom

Status 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8918-en.html>