## **Dukane ImagePro 9017**





**Brief Introduction** 

Beta 2.5

A brief introduction to the Dukane ImagePro 9017. The standard portable DILA projector has an SXGA+ 1400 x 1050 resolution and a contrast of 800:1. Horizontal and vertical keystone correction makes setting up the image childs play. An image width of up to 337 cm is possible as the projector has 1500 Ansi lumens. However, if room light is available, the image should be a maximum of 225 cm wide. Playing 1080P is also no problem for the projector. It was launched in 2003 and is no longer offered by the manufacturer Dukane.

Display Type

SXGA 4/3 Direct-Drive Image Light Amplification (D-ILA)

Contrast  $\frac{0}{6}$  800:1 full on/off  $\frac{2}{6}$  800:1 full on/off Black Level  $\frac{0}{5}$  1,8750 min. Lumen  $\frac{2}{5}$  0,627 min. Lumen

Offset

Resolution

**Light Source** 

Connections

Weight

Ansi-Lumen

SXGA+ 1400 x 1050 1.470.000 Pixel

UXGA 1600 x 1200 compressed

3 x 0,7" D-ILA Chip

Video Modes PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product

Application presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

250W NSH Lamp Articel Nr.: I-PRO 9017

Light Life 2000 h.

Operating Costs -

Focus Manual

Zoom Manual 1,3

Objective F=2,1-2,61

Throw Ratio 2,0-2,6:1

Audio 1 x 1W Mono

D-sub 15pin in S-Video Video Cinch Mini Jack in

RS232C in und out 5 x BNC RGBHV

5,90 kg / 13,01 lbs.

DVI-D in


Ceiling Mounting Yes Power 340W

Size WxHxD 298 x 124 x 360 mm (11,7"x4,9"x14,2") 13,3 L/dm<sup>3</sup>

Operating Noise 35dB

Keystone Vert.: +/-30° Hori.: +/-10°

Illumination -

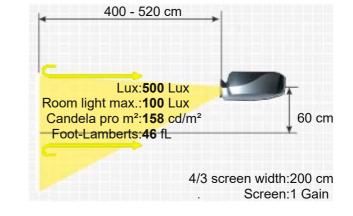

Key: 291 cm

Frequenz H-sync: 15-92 kHz V-sync: 50-120 Hz

Foot-Lamberts 46 fL / max. 337 cm screen width

158 cd/m<sup>2</sup>

■ Full HD 1080P compatible

Freeze

■ User logo

■ sRGB

■ Digital image shift

■ 16x digital zoom

2

2003 Discontinued (EOL) // Last update of the data: 2023-08-04

Status Data

More Details

**Features** 





Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

