

Key Features

- WUXGA 1920 x 1200
- 8,000 ANSI lumens white/color output
- Laser Phosphor Light Source
- Edge Blending & Warping
- Portrait Projection
- 360° Installation
- Motorized Zoom, Focus and Lens Shift
- Suitable for Heavy Usage, Digital Signage and 24/7 Applications
- Maintenance Free!
- Five Digital Inputs: HDBaseT, HDMI x 2, DVI-D x 1, 3G SDI x 1
- Wide Range of Lens Options - Compatible with Dukane's 9000 Series Lenses
- Supports Web Control, PJLink, Crestron Roomview, and AMX



Dukane's first 8,000 ANSI lumens, 1-chip DLP® laser light source projector delivering larger-than-life performance.

Dukane is excited to announce our first solid state light source 9080WUSS 8,000 lumen 1-chip DLP laser light source projector. The new laser diode light source offers approximately 20,000 hours of operation time and is maintenance free, there is no lamp or filter to replace providing a dramatic reduction in total cost of ownership. It can provide 24/7 use for digital signage applications and is a perfect choice for large auditoriums, conference rooms, museums, and concert or stage productions. Plus, 8,000 ANSI lumens light output and 20000:1 contrast ratio results in a super bright display with outstanding image clarity and uniformity. Always on the cutting-edge of technology, Dukane's 9080WUSS is an HDBaseT™-enabled projector which delivers whole-home and commercial distribution of uncompressed HD multimedia content over a single CAT5e/6 cable. HDBaseT is unique in its ability to provide professional installers with a much simpler and more cost-effective way to transmit uncompressed HD video up to 328 ft. No matter how large the application environment, the 9080WUSS delivers larger-than-life performance. For added piece of mind, Dukane's 9080WUSS is also backed by a generous warranty and our world-class service and support programs.



DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av




UNIQUE FEATURES

DICOM® Simulation Mode

The DICOM (Digital Imaging and Communications in Medicine) Simulation Mode projects grayscale images which approximate DICOM Part 14 specifications. This mode is ideal for viewing grayscale medical images, such as X-rays, for training and educational purposes.

The projectors have a DICOM (Digital Imaging and Communications in Medicine) Simulation Mode. This mode simulates the DICOM standard, which is a standard applicable to digital communications in medicine, and is useful for displaying medical images such as X-rays. These projectors are not medical devices and are not compliant with the DICOM standard, and neither the projector nor the DICOM Simulation Mode should be used for medical diagnosis. Comparison photos are simulations.

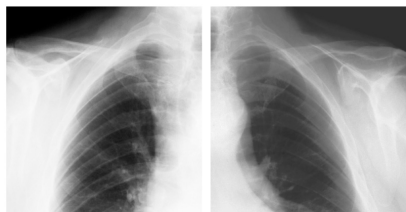

Standard Mode

DICOM Simulation Mode

Dust Resistant Sealed Engine




The air tight structure of the optical engine makes it possible to minimize dust particles entering which could eventually lead to a decrease in brightness. This construction gives the projector resistance to the effects of dust and enables the projector to be used in a wide variety of environments.

Edge Blending

Projectors are equipped with the Edge Blending function that achieves the seamless projection of one image using multiple projectors. The 9000 series comes with various blending functions that meet the level users are looking for.

Instant blending: Easily perform blending processing without the use of any special equipment.



Instant Blending



Maintenance Free Operation



Approximately 20,000 hours of maintenance free operation. There is no need to replace a lamp or air filter, providing a dramatic reduction in the total cost of ownership and time spent changing bulbs.

Motorized Zoom, Focus and Lens



Shift Control

Allows for greater range of installation possibilities. With the motorized function you can make fine adjustments through the remote control or RS232/IP device.

New Phosphor Wheel



A new heat-resistant material is used in the phosphor wheel to withstand the high output from the laser light source.

Perfect Fit



Enables the user to adjust individual corners independent of one another. This feature helps correct geometric and complicated distortions. Perfect Fit allows the projected image to fit correctly to the screen quickly and easily.

Picture By Picture



Enables the content from two input sources to be displayed simultaneously, side by side on one screen. You can use two sources including 2 HDMI, with both images sharing equal screen size. The feature is ideal for teleconferencing applications.

Picture In Picture



Enables you to display one image inside another image using two sources including 2 HDMI.

Quad Laser Bank System



Quad-Drive Optical engine comprises four module grouping laser diodes into independent light sources. The use of four separate laser modules means that in the unlikely event of one light source failing, projection continues with no perceivable drop in brightness.

Warping


Warping is possible from your computer by using the specialized application. Projection is possible on spherical surfaces and surfaces with corners, as well as conventional flat screens.



Curved screen



Curved screen




Spherical object



Corner wall

360° Rotation/Portrait Projection

Display rotation of 360° and portrait projection for creative applications and greater installation flexibility.



360° projection



Portrait projection

3D system by DLP Link



A special 3D emitter is no longer needed for 3D viewing.

DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av

9080WUSS DLP Laser Projector

DUKANE

New technology for high brightness and reliability with a lower cost of ownership.

Dukane's 9080WUSS laser projector is truly a technology achievement with premier performance for demanding application environments including large auditoriums, conference rooms, museums and concert or stage productions. It can also provide



24/7 use for digital signage applications. An array of new technology features includes Quick Start/Quick Off, Quad Laser Bank System, Phosphor Wheel, Dust Resistant Sealed Engine, and a more efficient cooling system. As Dukane's first 8,000 ANSI lumen, 1-chip DLP laser light source projector, combined with WUXGA 1920 x 1200 resolution, the 9080WUSS will deliver dynamic images guaranteed to dazzle any audience. All this combined with state-of-the-art connectivity features elevates the 9080WUSS to the forefront in projector performance, reliability and overall quality. The 9080WUSS greatly enhances the overall viewing experience, adding an entirely new dimension and level of excitement. Dukane is the brand name synonymous with advanced projector technology and innovation, and the 9080WUSS lives up to that reputation.



Front View



Ceiling Mount



Top View




Side Left



Side Right

Input/Outputs

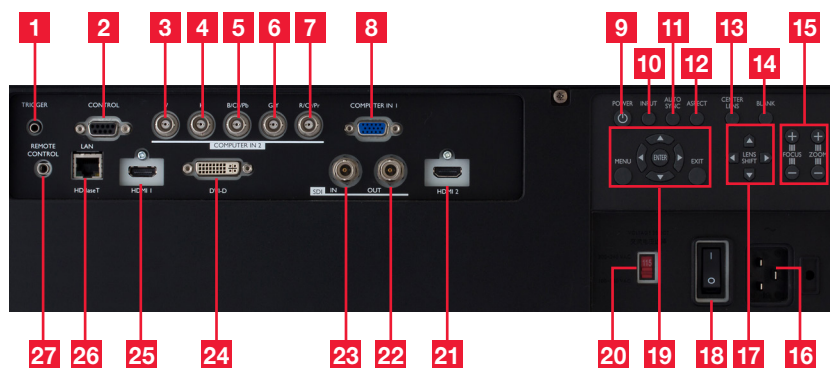

- | | | |
|----------------------|--------------------|----------------------|
| 1. Trigger | 10. Input | 19. Menu Controls |
| 2. Control (RS-232C) | 11. Auto | 20. Voltage Selector |
| 3. V-Sync | 12. Aspect | 21. HDMI2 |
| 4. H-Sync | 13. Lens Centering | 22. SDI Out |
| 5. B/Cb/Pb | 14. Blank | 23. SDI In |
| 6. G/Y | 15. Zoom/Focus | 24. DVI-D |
| 7. R/Cr/Pr | 16. AC In | 25. HDMI1 |
| 8. Computer in 1 | 17. Lens Shift | 26. HDBaseT |
| 9. Power | 18. AC Switch | 27. Remote Control |

DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av

9080WUSS

9080WUSS DLP Laser Projector



Accessories and Lenses

Supplied Accessories	Power cord, computer cable, remote control, AA battery x 2, RS232C cable, manual CD, application CD, user's manual, security label
Optional Lenses	7 optional lenses are available, FL-920, USL901, SL902, SD903, ML904, LL905, UL905
Replacement Parts	
Power Cable	EV03141
Remote Control	HL03141

Projection Throw Chart

Screen Size 16:10		Throw Distance	
Diagonal	Width	Min	Max
50	42	102	156
80	68	163	250
100	85	205	312
150	127	308	469
200	170	411	626
250	212	514	782
300	254	617	939
350	297	719	1096
400	339	822	1252
500	424	1028	1566
600	509	1234	1879

Throw Ratio: 2.4 - 3.6 : 1 (distance : width)
Screen size and throw distance are measured in inches with standard lens ML904.

Projection Lens Chart

Lens	Inches	Meters
ML904	201 - 309	5.1 - 7.9
USL901	64 - 81	1.6 - 2.0
SL902	97 - 146	2.5 - 3.7
SD903	137 - 207	3.5 - 5.3
LL905	294 - 478	7.5 - 12.1
UL905	469 - 745	11.9 - 18.9
FL920	0 - 22	0 - 0.55

Projection distances measured in inches and meters with standard lens and optional lenses when projecting onto a 100" diagonal screen.

All specifications subject to change without notice.
DLP and the DLP logo are registered trademarks of Texas Instruments. Crestron® and Crestron RoomView® are registered trademarks of Crestron Electronics, Inc. in the United States and other countries. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance.
©2016 Dukane America, Ltd. All Rights Reserved.

Specifications

Display	Projection Technology	Single Chip DLP
	Resolution	WUXGA - 1920 x 1200
	White Light Output	8,000 ANSI lumens
	Color Light Output	8,000 ANSI lumens
	Colors	1.07 billion colors
	Aspect Ratio	Native 16:10 and 4:3 / 16:9 compatible
	Contrast Ratio	20000 : 1 (using active IRIS)
	Throw Ratio (distance : width)	Specifications will vary depending on which lens is used with the projector
Operation	Focus Distance	102" - 187" (with standard lens)
	Display Size	50" - 600"
	Lens	Specifications will vary depending on which lens is used with the projector
	Expected Light Source Life*	Approximately 20,000 hours
Compatibility	Speaker Output	N/A
	Keystone	H: +/-60° and V: +/-40°
	Computer	VGA, SVGA, XGA, WXGA, WXGA+/SXGA/SXGA+/WSXGA+/UXGA/WUXGA, MAC 16"
	H-Sync	15 kHz - 106 kHz
	V-Sync	50 Hz - 120 Hz
	Composite Video	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	Component Video	480i, 480p, 576i, 720p, 1080i, 1080p
	HDMI	480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS clock 27 MHz - 150 MHz
Connectors	Digital Input	HDBaseT x 1, HDMI x 2, 3G-SDI In/Out, DVI-D x 1
	3G-SDI In	BCN connector x 1
	3G-SDI Out	BCN connector x 1
	DVI-D	DVI-D connector x 1
	HDMI	HDMI x 2
	Computer Input 1	15-pin mini D-sub x 1
	Computer Input 2	5 BNC connector x 1
	Network LAN Wired	RJ-45 jack x 1
	HDBaseT	RJ-45 jack x 1
	Wired Remote Control	3.5 mm stereo mini jack
	Control Terminals	9-pin D-sub x 1 (RS-232 control)
Ratings & Warranty	Trigger	3.5 mm stereo mini jack
	Power Supply	AC90-138V / AC180-264V, 50/60HZ
	Power Consumption	885W / 845W
	Operating Temperature	32°F - 95°F (0°C-35°C) Normal mode 32°F - 104° (0°C-40°C) Eco mode
	Dimensions (W x D x H)	19.7" x 22.7" x 8.5" / Shipping 30.0" x 27.5" x 17.5"
	Weight	Approximately 61.7 lbs. / Shipping 82 lbs.
	Approvals	UL 60950-1 / cUL FCC Part 15 subpart B class A
	Warranty	Five (5) year limited warranty plus Dukane's 1 year Peace of Mind Loaner Program
	UPC	605194005246

* Actual light source life will vary by individual light source based on environmental conditions, selected operating mode, user settings and usage. Hours of average light source life specified are not guaranteed and do not constitute part of the product or light source warranty. Light source brightness decreases over time.

DUKANE CORP

Audio Visual Products
2900 Dukane Drive, St. Charles, Illinois 60174
Toll-free: 888-245-1966 • Fax: 630-584-5156
E-mail: avsales@dukane.com
www.dukane.com/av

