



Projectors... and more!


Key Features

4,200 ANSI Lumens bright, with 95% uniformity and a 2500:1 contrast ratio.
Native XGA resolution. Compatible with input resolutions up-to UXGA.
Smart data compression and expansion, and video scaling.
DVI input supports digital data, plus digital video with HDCP.
Accepts composite, Component, and S-Video, both Normal and Widescreen.
Compatible with HD input resolution up to 1080i.
Built-in image offset. Vertical digital keystone correction.
Power management and Eco mode help prolong lamp life.
Selectable menu position and timeout. Auto input selection.
Wireless remote control.
3 year¹ projector warranty!

EIP-4200

XGA - DLP® - 4200 Lumens

- Filter free - Quiet operation
- 6 segment color wheel
- Closed captioning - Network monitoring

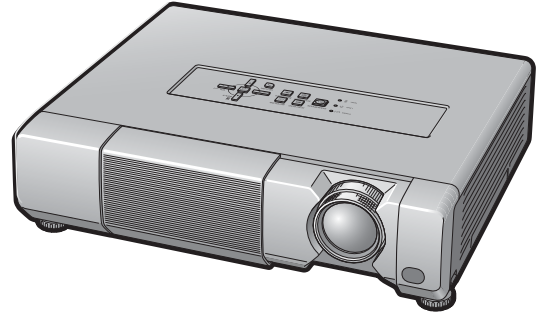

Included Accessories: Quick Start Guide. Owner's Manual on CD. AC Power Cord. Lens Cover. VGA type Computer Input Cable (Dsub 15~Dsub 15). Component Video Input Cable (Dsub 15~3-RCA). Wireless Remote Control & Batteries (AA x 2).

Optional Accessories: Replacement Lamp. Mouse Cable (USB-A~ USB-B). Ceiling Mount. Ceiling Post and Plate. Carry Case.

SPECIFICATIONS: Model EIP-4200

Brightness	up-to 4,200 ANSI Lumens	Video In Analog	480i/p, 575i/p, 720i/p, 1035i, 1080i/p
Contrast Ratio	up-to 2500:1	Video In Digital	480p, 575p, 720p, 1080i/p
Illumination Uniformity (corner to center)	95%	Image Signal Inputs	
Resolution and Aspect Ratio	XGA (1024x768), 4x3	1a. Digital Computer / Digital Video with HDCP	DVI-I x 1
Color Reproduction	10-bit (1.07 billion colors)	1b. Analog Computer / Component Video (via optional adapter)	Dsub15 x 1
Projection Lamp	330 Watts UHP	2. S-Video	S-Video x 1
Estimated Lamp Life	up-to 3,000 Hours	3. Composite Video	RCA x 1
Imaging System	0.7 in (18 mm) DMD® x 1	Audio Signal Inputs	
Total Pixels	786,432 ((1024x768) x 1)	For Input 1	Stereo: MiniStereo x 1
Color Wheel	6 segment, (RGBWYC)	For Inputs 2 & 3	Stereo: RCA x 2
Scanning Frequency	Auto: 15~110 kHz; 45~85 Hz	Outputs	
Pixel Clock	up-to 170 MHz	Computer Monitor	Dsub15 x 1
Lens	Attached - Manual Zoom and Focus	Audio Output	Variable, Stereo: MiniStereo x 1
Lens Specs	Speed: 2.5~2.7; FL: 0.826~0.952 in (21~24.2 mm)	Amplifier	Stereo: 10 Watt
Lens Ratios	Zoom Max:Min: 1.15:1; Throw:Width 1.5~1.7:1	Speaker	1.6 x 2.7 in (4.0 x 7.0 cm) x 2 (Stereo)
Image Diagonal	40~500 in (102~1270 cm)	Fan Noise	as low as 30 dBA
Image Width	2.65~33.3 ft (0.81~10.16 m)	Cabinet Size (HxWxD)	3.9 x 15.7 x 13.2 in (10.0 x 40.0 x 33.5 cm)
Throw Distance (Wide~Tele)	3.9~49 ft (1.2~15 m)		(excluding legs)
Projector Elevation Adjustment (legs)	up-to 9° Up	Weight	12.8 lb (5.8 kg)
Maximum Pitch	up-to 9° Up or Down	Packaged Size (HxWxD)	11 x 20.3 x 18.6 in (28 x 51.6 x 47.3 cm)
Vertical Lens Shift (% of image height)	Fixed: 52% Up	Packaged Weight	22.0 lb (10.0 kg)
Vertical Keystone Correction	Digital: up-to 40° Up or Down	Power Requirements	100-240V AC, 50/60 Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption	up-to 429 W
Local Control / Power Management	Full Function / Auto Shutdown	Heat	up-to 1610 BTU/hr (1699 kJ/hr)
RS232 Control Port	Dsub9 x 1	Power Cord	10 ft (3 m) Type C13, Detachable
Remote Projector Control	Wireless (Infra Red) x 1	Electrical Safety Compliance	IEC / UL / cUL
LAN Port	RJ45 x 1	Electromagnetic Compatibility	FCC Class A, CE Mark
Mouse Port	USB-B x 1	Security Facilities	Kensington® Security Slot, Security Bar
Computer Input Pixel Range	1600x1200~640x480	Operating Temperature	41~95°F (5~35°C)
Computer In 4x3 analog	UXGA, SXGA+, SXGA, XGA, SVGA, VGA, MAC	User Maintenance	Change Lamp
Computer In Wide analog	WSXGA+, WXGA+, WXGA	UPC	4571194673883
Computer In 4x3 digital	SXGA+, SXGA, XGA, SVGA, VGA	Warranty	
Computer In Wide digital	WXGA	¹ Projector	3 Years / 6,000 Hrs Use* (Parts and labor to correct defects)
Image Signal Resizing	Smart Scaling Technology	Lamp	90 Days / 500 Hrs Use* (Failed lamp replaced pro-rata)
Video Formats	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N		* whichever occurs first

SPOTLIGHT PRESENTATIONS

1402 Howard Street • Omaha, NE, 68102
Phone: 402-341-8476 • Fax: 402-341-8487
Website: <http://www.spotlightpresentations.com>
Email: info@spotlightpresentations.com

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2010 Eiki International, Inc. Issued March 23, 2010.