

# Eiki LC HDT10D



EIKI LC HDT10D



A brief introduction to the LC HDT10D: The Eiki stationary LCD projector offers 6000 Ansi lumens, a contrast of 1000:1 and an HDTV 1920 x 1080 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. 6000 Ansi lumens ensure that a picture width of 787 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 525 cm. Furthermore, the projector can play 1080P without any problems. The model built in 2004 is no longer offered by Eiki, but is still very popular in our projector database.

3 x 1,65" LCD TFT Panel mit MLA  
HDTV 16/9 Liquid Crystal Display with Micro Lense Array

6000 / 3000 im singel lamp Mode  
2588 Lux (bei 203 cm Screen)  
1000:1 full on/off  
1000:1 full on/off  
6,0000 min. Lumen  
2.594 min. Lumen  
Vert.: +/-60% Hori.: +/-20% motorisch max.

HDTV 1920 x 1080

2.073.600 Pixel  
UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

4 x 250W UHP Lamp  
Articel Nr.: 610 305 1130

1500 h.

14,63% / 0,48 €

Powered

Powered

optional

optional

3W

Input 1:  
Dual-SDI in Input 2: 5 X BNC in  
Cinch Stereo in und out  
RS232C

Input 3: DVI-I in  
Input 4: optional belegbar  
D-sub 9 pin in  
USB in  
Mini Jack in

Eingang für Kabelfernbedienung


Yes

1500W

581 x 252 x 783 mm (22,9"x9,9"x30,8") 114,64 L/dm<sup>3</sup>

46dB

52,00 kg / 114,64 lbs.

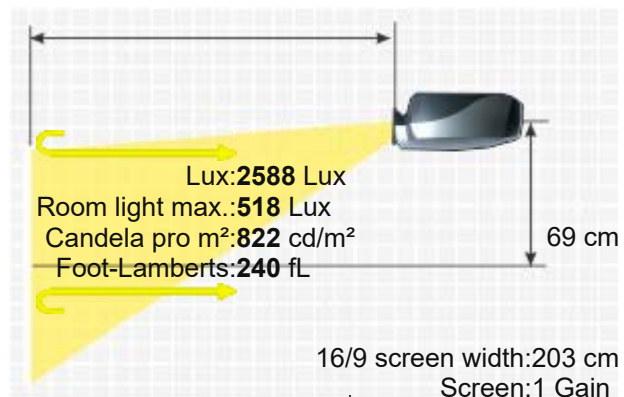

Keystone Illumination

Vert.: +/-40°  
90%

Frequenz

H-sync: 15-120 kHz  
V-sync: 50-120 Hz  
Range max.: 230 MHz

Foot-Lamberts

240 fL / max. 787 cm screen width  
822 cd/m²  

Full HD 1080P compatible

Lens shift Funktion motorisch max.

Freeze

User logo

Gamma correction

Remote control with laser pointer und mouse control

Digital Zoom

Triple noise reduction

Features

Full HD 1080P compatible

Lens shift Funktion motorisch max.

Freeze

User logo

Gamma correction

Remote control with laser pointer und mouse control

Digital Zoom

Triple noise reduction

Optional

Bulb only Osram

NLMP19587

Lamp ruby

Ruby-LMP19587

Lamp original

610-305-1130 / LMP72 / ET-SLMP72

Compatible lamp

LMP-K1298

Universal Remote original

Fernb-uni-V3

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1298>

| Optional Lenses      |             |             |          |         |         |
|----------------------|-------------|-------------|----------|---------|---------|
| Name                 | Ratio       | Distance    | Shift V  | Shift H | Zoom    |
| Zoom Optional Lenses |             |             |          |         |         |
| Eiki AH-32601 (W06)  | 1.23-1.57:1 | 2.5-3.2 m   | +/-39%   | +/-10%  | Powered |
| Eiki AH-32581 (T03)  | 6.14-8.91:1 | 12.5-18.1 m | +/-50%   | +/-10%  | Powered |
| Eiki AH-32401 (W04)  | 1.57-2.05:1 | 3.2-4.2 m   | +/-39%   | +/-10%  | Powered |
| Eiki AH-22051 (S03)  | 2.66-3.59:1 | 5.4-7.3 m   | +/-50%   | +/-10%  | Powered |
| Eiki AH-21201 (W02Z) | 1.43-1.86:1 | 2.9-3.8 m   | +/-39%   | +/-10%  | Powered |
| Eiki AH-21102 (S02Z) | 2.07-2.67:1 | 4.2-5.4 m   | +/-66.7% | +/-10%  | Powered |
| Eiki AH-21091 (T02)  | 4.33-6.06:1 | 8.8-12.3 m  | +/-50%   | +/-10%  | Powered |
| Eiki AH-21022 (M01Z) | 3.41-4.44:1 | 6.9-9 m     | +/-50%   | +/-10%  | Powered |
| Fix Optional Lenses  |             |             |          |         |         |
| Eiki AH-32021 (W03)  | 0.82:1      | 1.7 m       | 0.0% Fix |         | No Zoom |
| Eiki AH-21032 (T01Z) | 6.96:1      | 14.1 m      | +/-50%   | +/-10%  | No Zoom |
| Eiki AH-21012 (W01Z) | 1.23:1      | 2.5 m       | +/-39%   | +/-10%  | No Zoom |

Status Data

2004 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/eikilchdt10d-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

