

Eiki LC HDT2000

EIKI LC HDT2000



The large screen LC HDT2000 LCD has 15000 Ansi-Lumen, a contrast of 3000:1 and a HD2K 2048 x 1080 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 1067 cm image width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 711 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Furthermore, the projector can play 1080P without any problems. The projector was launched in 2011 and is no longer sold by the manufacturer, but is still one of the most popular projectors.



3 x 1,64" LCD TFT Panel
HD2K 4/3 Liquid Crystal Display

Projector	15000	5000 Lux (bei 200 cm Screen)
	3000:1 full on/off	3000:1 full on/off
	5,0000 min. Lumen	1,668 min. Lumen
Vert.: +/-50% Hori.: +/-10%		
Resolution	HD2K 2048 x 1080	
	2.211.840 Pixel	
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p	
Application	Event Very large screen width and rooms with plenty of light and shaded daylight.	
Light Source	4 x 380W NSHA Lamp	
Light Life	Articel Nr.: 610 350 9051	
	2000 h. 3000 h. in Eco Mode	

Operating Costs 12,81% / 0,82 €

Focus Powered

Zoom Powered


Objective optional

Throw Ratio optional

Audio -

HDMI 1.3 in
DVI-D mit HDCP in
D-sub 15 pin in
5 x BNC RGBHV in
S-Video in
Cinch Video in
RJ45 in
RS232C
USB Typ B

Ceiling Mounting Yes

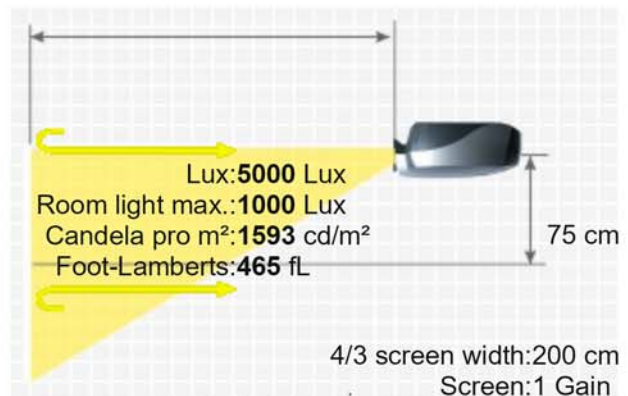

Power 1850 / 1450W in Eco Mode
Size WxHxD 650 x 349 x 815 mm (25,6"x13,7"x32,1") 184,88 L/dm³
Operating Noise 51 / 48 dB in Eco Mode

Weight 46,50 kg / 102,51 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination 90%
Frequenz H-sync: 15-120 kHz
V-sync: 48-120 Hz
Range max.: 230 MHz
Foot-Lamberts 465 fL / max. 1067 cm screen width
1593 cd/m²


- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Digital image shift
- Edge Blending
- Picture-in-Picture
- PJLink™
- Lan network compatible.
-

Features

Optional

- Filter box, automatic, complete original POA-SSR-160 / ET-SR160 / 003-003841-01
- Air filter original POA-FIL-160 / 610-354-6902 / 003-003792-01
- Object lens original ET-SW05 / LNS-W05
- Object lens original ET-SS04 / LNS-S04
- Smoke filter original ET-SRE16 / 003-003705-01 / AH-38323
- Object lens original ET-SM02 / LNS-M02
- Lowermost filter for box original 6103513133 / 003-003842-01
- Lamp original 610-350-9051 / LMP147 / ET-SLMP147

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fi201141>

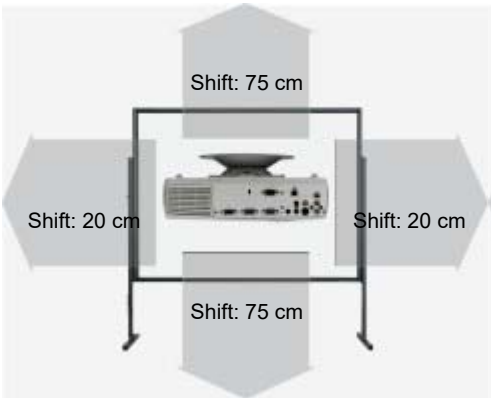

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W06	1.2-1.5:1	2.4-3 m	+/-50%	+/-12.5%	Powered
LNS-W05	1.31-1.84:1	2.6-3.7 m	+/-50%	+/-12.5%	Powered
LNS-W04	1.5-2:1	3-4 m	+/-50%	+/-12.5%	Powered
LNS-W02Z	1.4-1.8:1	2.8-3.6 m	+/-50%	+/-12.5%	Powered
LNS-T03	6.3-9:1	12.6-18 m	+/-50%	+/-12.5%	Powered
LNS-T02	4.4-6.2:1	8.8-12.4 m	+/-50%	+/-12.5%	Powered
LNS-S04	2-2.6:1	4-5.2 m	+/-50%	+/-12.5%	
LNS-S03	2.6-3.5:1	5.2-7 m	+/-50%	+/-12.5%	Powered
LNS-M02	3.5-4.5:1	7-9 m	+/-50%		Powered
Fix Optional Lenses					
LNS-W03/E	0.8:1	1.6 m	0.0% Fix		No Zoom
LNS-W01Z	1.24:1	2.5 m	+/-50%	+/-12.5%	No Zoom
LNS-T01Z	6.9:1	13.8 m	+/-50%	+/-12.5%	No Zoom

Status 2011 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/eikilchdt2000-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.