

Eiki LC X80

EIKI LC X80



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

A brief introduction to the LC X80: The Eiki stationary LCD projector offers 6500 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 6500 Ansi lumens, an image width of 702 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 468 cm). Furthermore, the projector can play 1080P without any problems. The model built in 2007 is no longer offered by Eiki, but is still a popular projector in our database.



3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

6500

2000:1 full on/off

3,2500 min. Lumen

Screen

Vert.: +50% -0%

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

330W NSH Lamp

Articel Nr.: 610 334 2788

2000 h. 3000 h. in Eco Mode

-

Powered

Powered

optional

optional

No


DVI-D mit HDCP in
5 x BNC RGBHV in
D-sub 15pin in
YUV in
S-Video in
Cinch Video in
USB Typ B
RS232C Din pin in

Screen

2167 Lux (bei 200 cm Screen)

2000:1 full on/off

1,085 min. Lumen

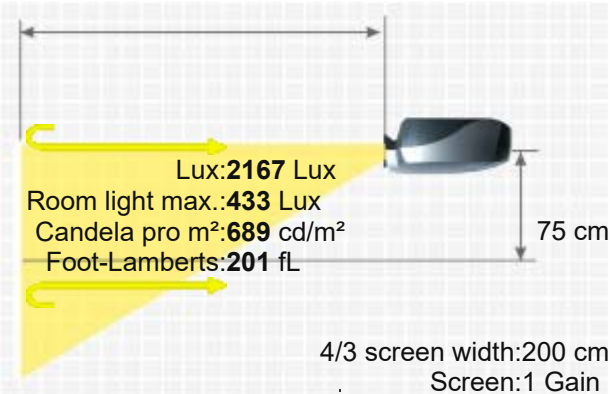

Ceiling Mounting Yes
Power 490 / 392W in Eco Mode
Size WxHxD 370 x 187 x 440 mm (14,6"x7,4"x17,3") 30,44 L/dm³
Operating Noise 40 / 32 dB in Eco Mode

Weight 11,20 kg / 24,69 lbs.
Keystone Vert.: +/-35°
Hori.: +/-15°
Illumination 90%
Frequenz H-sync: 15-100 kHz
V-sync: 48-100 Hz
Range max.: 180 MHz
Foot-Lamberts 201 fL / max. 702 cm screen width
689 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with laser pointer und mouse control
- Digital Zoom
- 10-bit video processing

Bulb only NLMP16853
Lamp ruby Ruby-LMP16853
Lamp original 610-334-2788 / LMP108 / ET-SLMP108
Compatible lamp LMP-K16853

Optional Universal Remote original Fernb-uni-V3
Air filter compatible Alternative zu:ET-SFYL131 / POA-FIL-131 / 610-334-3747 / 003-001726-01
Remote control original 6450929502 / CXWH
Air filter original ET-SFYL131 / POA-FIL-131 / 610-334-3747 / 003-001726-01

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18006>



Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-24241 (T32)	4.21-5.82:1	8.4-11.6 m	50%		Powered
Eiki AH-23132 (T31A)	2.39-4.19:1	4.8-8.4 m	50%		Powered
Eiki AH-23122 (W31A)	1.29-1.81:1	2.6-3.6 m	50%		Powered
Eiki AH-23061 (S30)	1.82-2.37:1	3.6-4.7 m	50%		Powered
Eiki 0001-4279	5.73-8.59:1	11.5-17.2 m	50%		Manual
Eiki 0001-4278	4.96-8.3:1	9.9-16.6 m	50%		Manual
Eiki 0001-4277	2.62-4.77:1	5.2-9.5 m	50%		Manual
Fix Optional Lenses					
Eiki AH-32011 (W32)	0.84:1	1.7 m	0.0% Fix		No Zoom
Eiki 0001-4296	0.79:1	1.6 m	0.0% Fix		No Zoom
Eiki 0001-4276	1.15:1	2.3 m	0.0% Fix		No Zoom

Status 2007 Discontinued (EOL) // Last update of the data: 2023-08-04





HCinema

<https://www.projector-database.com/pro/eikilcx80-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.