

Eiki LC X800

EIKI LC X800



Top

A brief introduction to the LC X800: The Eiki large-format LCD projector offers 12000 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. The projector can illuminate images up to 954 cm wide thanks to the 12000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 636 cm. Playing 1080P is also no problem for the projector. The projector was launched in 2010 and is no longer sold by the manufacturer, but is still very popular in our projector database.



3 x 1,8" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

Projector 12000 / 5000 im singel Lamp Mode
 Contrast 3000:1 full on/off
 Black Level 4,0000 min. Lumen
 Lens shift Vert.: +/-50% Hori.: +/-10%
 Resolution XGA 1024 x 768
 786.432 Pixel
 Video Modes UXGA 1600 x 1200 compressed
 Application PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
 Light Source Event | Very large screen width and rooms with plenty of light and shaded daylight.
 2 x 330W NSHA Lamp
 Light Life Articul Nr.: 610 334 2788
 2000 h. 3000 h. in Eco Mode

Screen
 4000 Lux (bei 200 cm Screen)
 3000:1 full on/off
 1,335 min. Lumen

Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Powered

Powered

optional

optional

-

DVI-D mit HDCP in
 5 x BNC RGBHV in
 RS232C Din 9 pin in
 Weitere Anschlüsse optional.

Yes

950 / 780W in Eco Mode

530 x 267,5 x 757 mm (20,9"x10,5"x29,8") 107,12 L/dm³


46 / 45 dB in Eco Mode



Weight 27,60 kg / 60,85 lbs.
Keystone Vert.: +/-40°
Hori.: +/-20°
Illumination 90%
H-sync: 15-120 kHz
Frequenz V-sync: 48-120 Hz
Range max.: 230 MHz
Foot-Lamberts 372 fL / max. 954 cm screen width
1275 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Freeze
 - User logo
 - Eco Mode
 - Kensington Slot
 - Gamma correction

Bulb only NLMP16853
Lamp ruby Ruby-LMP16853
Lamp original 610-334-2788 / LMP108 / ET-SLMP108
Compatible lamp LMP-K16853
Optional Universal Remote original Fernb-uni-V3
Air filter compatible Alternative zu:ET-SFYL131 / POA-FIL-131 / 610-334-3747 / 003-001726-01
Remote control original 6450929502 / CXWH
Air filter original ET-SFYL131 / POA-FIL-131 / 610-334-3747 / 003-001726-01
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18006>

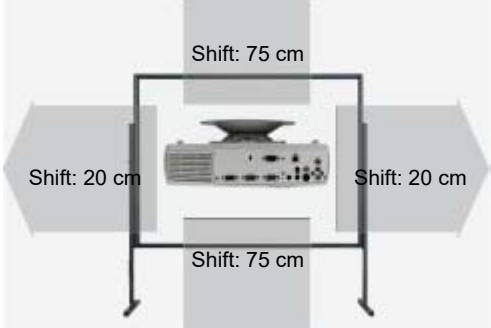

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-32601 (W06)	1.22-1.55:1	2.4-3.1 m	+/-40%	+/-10%	Powered
AH-32581 (T03)	6.08-8.82:1	12.2-17.6 m	+/-40%	+/-10%	Powered
AH-32401 (W04)	1.55-2.03:1	3.1-4.1 m	+/-40%	+/-10%	Powered
AH-22051 (S03)	2.63-3.56:1	5.3-7.1 m	+/-40%	+/-10%	Powered
AH-21202 (W02Z)	1.42-1.84:1	2.8-3.7 m	+/-40%	+/-10%	Powered
AH-21102 (S02Z)	2.05-2.65:1	4.1-5.3 m	+/-50%	+/-10%	Powered
AH-21091 (T02)	4.29-6:1	8.6-12 m	+/-40%	+/-10%	Powered
AH-21022 (M01Z)	3.38-4.39:1	6.8-8.8 m	+/-40%	+/-10%	Powered
0001-4299	7.37-12.61:1	14.7-25.2 m	+/-40%		Manual
0001-4297	1.9-3.45:1	3.8-6.9 m	+/-40%		Manual
0001-4261	5-8.53:1	10-17.1 m	+/-40%		Manual
0001-4260	3.09-4.39:1	6.2-8.8 m	+/-40%		Manual
Fix Optional Lenses					
AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
AH-21012 (W01Z)	1.21:1	2.4 m	+/-40%	+/-10%	No Zoom
(T01Z)	7:1	14 m	+/-40%	+/-10%	No Zoom

Status 2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Data





HCinema

<https://www.projector-database.com/pro/eikilcx800-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.