

Eiki LC X985



EIKI LC X985



With the LC X985, manufacturer Eiki offers an LCD projector with XGA 1024 x 768 resolution and a contrast of 500:1. With the lens shift function, the projector can be positioned very freely. 2600 Ansi lumens ensure that a picture width of 444 cm is also possible. However, if room light is available, the picture should be max. 296 cm wide. This model is no longer offered by Eiki, but is still very popular in our projector database.

3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

2600
500:1 full on/off
5,2000 min. Lumen
Vert.: +50% -0%
XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed
PAL/PAL-M&N/SECAM/NTSC/NTSC4.43
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Medium screen width or rooms with little light, max. 100 lumens.
200W UHP (long life) Lamp
Articel Nr.: 610-293-5868
2000 h.

841 Lux (bei 203 cm Screen)
500:1 full on/off
1.692 min. Lumen

Vert.: +50% -0%
XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed
PAL/PAL-M&N/SECAM/NTSC/NTSC4.43
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Medium screen width or rooms with little light, max. 100 lumens.
200W UHP (long life) Lamp
Articel Nr.: 610-293-5868
2000 h.

SXGA 1280 x 1024 compressed
PAL/PAL-M&N/SECAM/NTSC/NTSC4.43
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Medium screen width or rooms with little light, max. 100 lumens.
200W UHP (long life) Lamp
Articel Nr.: 610-293-5868
2000 h.

Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Medium screen width or rooms with little light, max. 100 lumens.
200W UHP (long life) Lamp
Articel Nr.: 610-293-5868
2000 h.

Medium screen width or rooms with little light, max. 100 lumens.
200W UHP (long life) Lamp
Articel Nr.: 610-293-5868
2000 h.

200W UHP (long life) Lamp
Articel Nr.: 610-293-5868
2000 h.

Articel Nr.: 610-293-5868
2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

2000 h.


2000 h.

2000 h.

2000 h.

2000 h.

2000 h.

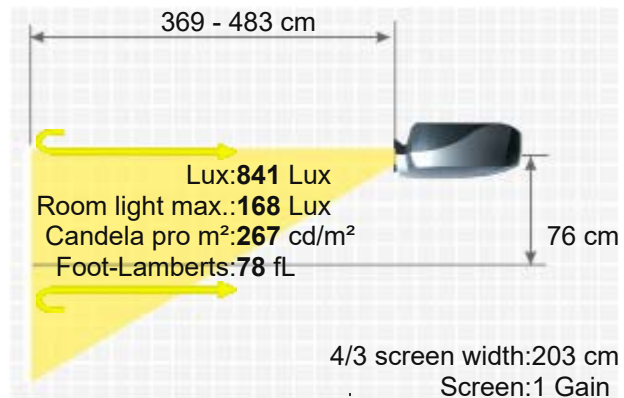

Eingang 1:

1 x D-SUB 15 1 x DVI-D1 x 3,5 mm Klinke (Stereo) für Audio

Eingang 2: 5 x BNC (R/G/B/H/V, Komponente, FBAS) 1 x Mini DIN 4-Pin (S-Video) 1 x 3,5 mm Klinke (Stereo) für Audio

Eingang 3: 3 x RCA (Komponente und FBAS) 1 x Mini DIN 4-Pin (S-Video) 2 x RCA (R, L-mono) für Audio

Weitere Anschlüsse: 1 x USB Typ B1 x Mini DIN 8-Pin (Control-Port) 1 x 3,5 mm Klinke für Fernbedienung

Yes

300W

319 x 168 x 429 mm (12,6"x6,6"x16,9") 22,99 L/dm³

37dB

37dB

37dB

37dB

37dB

37dB

37dB

37dB

37dB

37dB

7,90 kg / 17,42 lbs.

Vert.: +/-40°

90%

90%

90%



Weight 7,90 kg / 17,42 lbs.

Keystone Vert.: +/-40°

Illumination 90%

Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 160 MHz	
Foot-Lamberts	78 fL / max. 444 cm screen width 267 cd/m²	
Features	■ Lens shift Funktion ■ Freeze ■ Kensington Slot ■ Gamma correction ■ Remote control with laser pointer und mouse control ■ Digital Zoom ■ lens shift	
In Test	-	
Optional	Philips bulb only	NLMP3422
	Lamp ruby	Ruby-LMP3422
	Lamp original	610-325-2940 / LMP99 / 610-293-5868 / LMP38
	Compatible lamp	LMP-K1356
	Universal Remote original	Fernb-uni-V3
	Remote control original	645 048 1888 / CXJL
	Air filter (big) original	POA-FIL-130-g / 910 303 8774
	Air filter (small) original	POA-FIL-130-k / 910 303 8781
	Ceiling Mount 100-120	Halterung100
	Order here: https://www.hcinema.de/lampen/shop-en.php?id=n1356	

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-24241 (T32)	4.21-5.82:1	8.5-11.8 m	50%		Powered
Eiki AH-23132 (T31A)	2.39-4.19:1	4.9-8.5 m	50%		Powered
Eiki AH-23122 (W31A)	1.29-1.72:1	2.6-3.5 m	50%		Powered
Eiki 0001-4270	7.04-11.74:1	14.3-23.8 m	50%		Manual
Eiki 0001-4257	1.22-1.72:1	2.5-3.5 m	50%		Manual
Eiki 0001-4239	5.73-8.59:1	11.6-17.4 m	50%		Manual
Eiki 0001-4238	4.96-8.3:1	10.1-16.8 m	50%		Manual
Eiki 0001-4237	2.62-4.77:1	5.3-9.7 m	50%		Manual
Fix Optional Lenses					
Eiki AH-32011 (W32)	0.84:1	1.7 m	0.0% Fix		No Zoom
Eiki 0001-4235	1.15:1	2.3 m	0.0% Fix		No Zoom
Eiki 0001-4234	0.95:1	1.9 m	0.0% Fix		No Zoom

Status

2001 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

More Details



HCinema

<https://www.projector-database.com/pro/eikilcx985-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.