


Eiki LC XL200/L

EIKI LC XL200/L

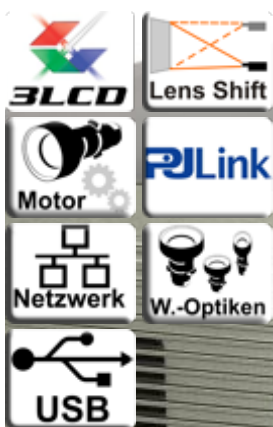

Brief Introduction

Beta 2.5

The Eiki LC XL200/L is an LCD projector with XGA 1024 x 768 resolution and a contrast ratio of 1000:1. The lens shift function allows the projector to be positioned very freely. A picture width of up to 675 cm is possible; if the picture width is smaller (we recommend max. 450 cm), even rooms with residual light are no problem. Even 1080P video signals are no problem for the projector. The model, built in 2009, is no longer offered by Eiki, but is still very popular in our projector database.

Display Type



3 x 0,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector

6000 / 4800 im Eco Mode

Screen

2000 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

6,0000 min. Lumen

2,006 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

WUXGA 1920 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

330W Lamp

Article Nr.: 610-346-9607 / LMP136 /

ET-SLMP136

Light Life

2000 h. 3000 h. in eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,69

Objective

F=1,8-2,3 f=26,9-45,4 mm / L optional

Throw Ratio

1,65-2,79:1

Audio

7W Mono

Connections

DVI in


5 x BNC RGBHC in

D-sub 15 pin in und out

YUV in

S-Video in

Cinch Video in

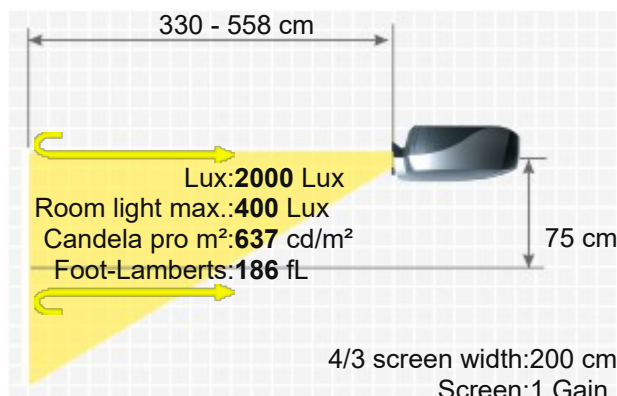

Mini Jack Audio in und out
USB
RJ45 in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
460W / 0,6W standby
489,5 x 164 x 434,8 mm (19,3"x6,5"x17,1") 34,81 L/dm³
38 / 31 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts


9,70 kg / 21,38 lbs.
Vert.: +/-40°
Hori.: +/-20°
90%
H-sync: 15-100 kHz
V-sync: 48-100 Hz
Range max.: 140 MHz
186 fL / max. 675 cm screen width
637 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Remote control with mouse control
- PLink™
- Lan network compatible.
-

Screen Mirroring

-

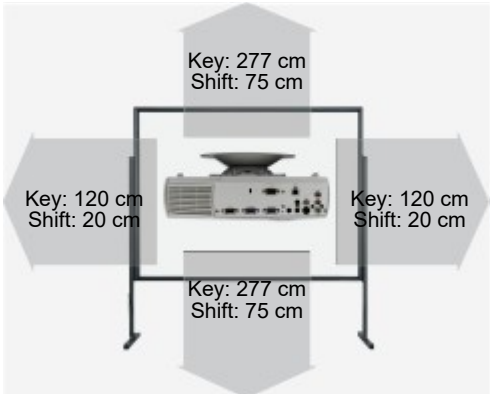

Optional accessories

	Lampe Ruby	Ruby-LMP19346	171,26 €
	Lampe Original	610-346-9607 / LMP136 / ET-SLMP136	EOL €
	Kompatible Lampe	LMP-K19346	62,05 €
	Luftfilter Kompatibel	Alternative zu:POA-FIL-080 / 610-346-9034 / ET-SFYL080	41,95 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	645 097 4069 / CXZH	EOL €
	Luftfilter Original	POA-FIL-080 / 610-346-9034 / ET-SFYL080	EOL €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
LNS-W20	1.25-1.7:1	2.5-3.4 m	+/-50%	+/-10%	Powered
LNS-T21	4.6-7.36:1	9.2-14.7 m	+/-50%	+/-10%	Powered
LNS-T20	2.89-4.6:1	5.8-9.2 m	+/-50%	+/-10%	Powered
LNS-S20	1.7-2.89:1	3.4-5.8 m	+/-50%	+/-10%	Powered
Fix Optional Lenses					
LNS-W21	0.8:1	1.6 m	0.0% Fix		No Zoom

Status Data 2009 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/eikilcx1200-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.