

Eiki LC XT2

EIKI LC XT2



The Eiki LC XT2 stationary LCD projector has 7700 Ansi lumens, a contrast of 700:1 and an XGA 1024 x 768 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 764 cm is possible, if the image width is smaller (we recommend max. 509 cm), rooms with residual light are also no problem. The projector was launched in 2002 and is no longer sold by the manufacturer, but is still a popular projector in our database.



3 x 1,8" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

7700

700:1 full on/off

11,0000 min. Lumen

Vert.: +/-50% Hori.: +/-10%

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM, NTSC 4.43, PAL-M & N

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

4 x 200W UHP Lamp

Articel Nr.: LC-XT2

2000 h.

18,6% / 0,61 €

Powered

Powered

optional

optional

2 x 3W Stereo


INPUT 1:
DVI x 1 (Digital Visual Interface),
RCA x 2 (R, L-Mono), Mini Din8-pin x 1 (Maus control port)
INPUT 2:
5 BNC x 5 (RGBHV & Y, Pb/Cb, Pr/Cr),
RCA x 2 (R, LMono),
Mini Din8-pin x 1 (Maus control port) INPUT 3:
BNC x 1 (Composite),
Mini DIN4-pin (S-Video),

Screen

2491 Lux (bei 203 cm Screen)

700:1 full on/off

3.574 min. Lumen

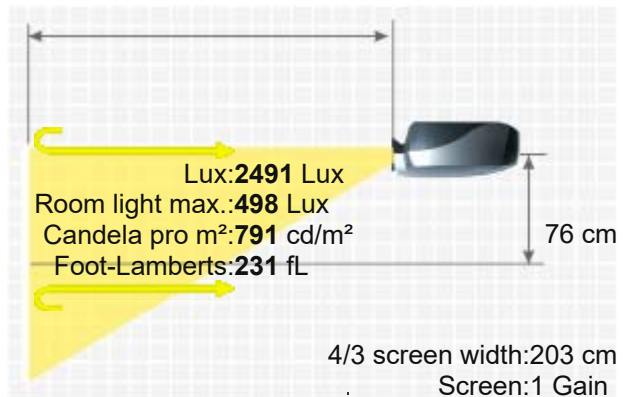

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

RCA x2 (R, L-Mono)INPUT 4: D-sub 15 x 1,
 RCA x 2 (R, L-Mono),
 Mini Din8-pin x 1
 Ceiling Mounting Yes
 Power 850W
 Size WxHxD 581 x 251 x 783 mm (22,9"x9,9"x30,8") 114,19 L/dm³
 Operating Noise 46dB

Weight 35,30 kg / 77,82 lbs.
 Keystone Vert.: +/-40°
 Illumination 90%
 Frequenz H-sync: 15-100 kHz
 V-sync: 50-100 Hz
 Range max.: 180 MHz
 Foot-Lamberts 231 fL / max. 764 cm screen width
 791 cd/m²

- Lens shift Funktion
- Freeze
- Gamma correction
- Remote control with laser pointer und mouse control
-

Optional	Single Philips bulb only	NLMP3386
	Single lamp ruby	Ruby-LMP3386
	Single lamp original	610-292-4831 / LMP42 / ET-SLMP42
	Compatible lamp	LMP-K1332
	Universal Remote original	Fernb-uni-V3
	Air filter compatible	Alternative zu:MT8A / 910 301 4815
	Remote control original	945 047 7882 / CXJY
	Air filter original	MT8A / 910 301 4815


Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1401>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Eiki AH-32601 (W06)	1.24-1.57:1	2.5-3.2 m	+/-40%	+/-10%	Powered
Eiki AH-32581 (T03)	6.12-8.89:1	12.4-18 m	+/-40%	+/-10%	Manual
Eiki AH-32401 (W04)	1.59-2.08:1	3.2-4.2 m	+/-40%	+/-10%	Powered
Eiki AH-22051 (S03)	2.63-3.56:1	5.3-7.2 m	+/-40%	+/-10%	Powered
Eiki AH-21202 (W02Z)	1.42-1.84:1	2.9-3.7 m	+/-40%	+/-10%	Powered
Eiki AH-21102 (S02Z)	2.05-2.65:1	4.2-5.4 m	+/-50%	+/-10%	Powered
Eiki AH-21091 (T02)	4.29-6:1	8.7-12.2 m	+/-40%	+/-10%	Powered
Eiki AH-21022 (M01Z)	3.38-4.39:1	6.9-8.9 m	+/-40%	+/-10%	Powered
Eiki 0001-4244	5.09-8.48:1	10.3-17.2 m	+/-40%	+/-10%	Manual
Eiki 0001-4243	3.14-5.02:1	6.4-10.2 m	+/-40%	+/-10%	Manual
Fix Optional Lenses					
Eiki AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
Eiki AH-21032 (T01Z)	6.89:1	14 m	+/-40%	+/-10%	No Zoom
Eiki AH-21012 (W01Z)	1.21:1	2.5 m	+/-40%	+/-10%	No Zoom
Eiki 0001-4245	9.65:1	19.6 m	+/-40%	+/-10%	No Zoom
Eiki 0001-4242	1.45:1	2.9 m	+/-40%	+/-10%	No Zoom
Eiki 0001-4241	1.03:1	2.1 m	0.0% Fix		No Zoom

Status 2002 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

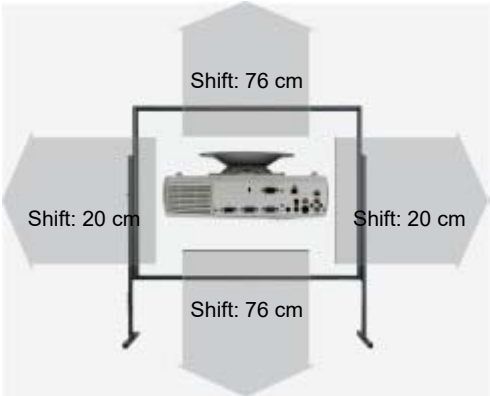



HCinema

<https://www.projector-database.com/pro/eikilcxt2-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.