

Eiki LC XG250/L

EIKI LC XG250/L



The Eiki LC XG250/L stationary LCD projector has 3800 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. Includes a lens shift and keystone correction function, which provides freedom during installation. The projector can illuminate images up to 537 cm wide thanks to its 3800 Ansi lumens. The projector can create rooms with residual light with a smaller image width, max. 358 cm is recommended. It was launched in 2006 and is no longer offered by the manufacturer Eiki.

Brief Introduction

Beta 2.5

Display Type



3 x 0,99" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3800 3420 Normal / 3040 im Eco
Mode

Screen 1230 Lux (bei 203 cm Screen)

Contrast

1000:1 full on/off

Screen 1000:1 full on/off

Black Level

3,8000 min. Lumen

Screen 1.234 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-15% motorisiert

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

300W UHP Lamp

Light Life

Articel Nr.: 610 330 7329

2500 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,3

Objective

F=1,7-2,1 f=33-43 mm / L optional

Throw Ratio


1,64-2,14:1

Audio

1W Stereo

Connections

DVI-D mit HDCP in
D-sub 15 pin in und out
5 x BNC RGBHV in
S-Video in
Cinch Video in
RS232C Din 8pin in
USB Typ B

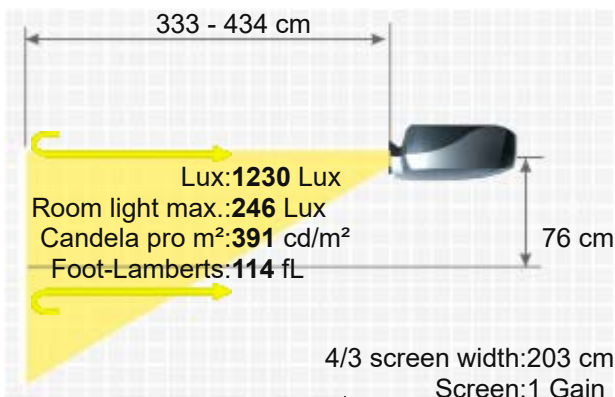



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Ja
430 / 360W in Eco Mode
348 x 156,5 x 444 mm (13,7"x6,2"x17,5") 24,1 L/dm³
38 / 31 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

8,70 kg / 19,18 lbs.
Vert.: +/-40°
90%
H-sync: 15-100 kHz
V-sync: 50-100 Hz
Range max.: 100 MHz
114 fL / max. 537 cm screen width
391 cd/m²


Features

- Lens shift Funktion motorisiert
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with laser pointer und mouse control
- Optional LAN network compatible.
- digital zoom.
- automatic display of air pollution.
- vertical operation possible (up to 90°).
- de-interlacer with 3:2 2:2 pull down.

Optional

Bulb only	NLMP16004
Lamp ruby	Ruby-LMP16004
Lamp original	610-330-7329 / LMP105 / ET-SLMP105
Compatible lamp	LMP-K16004
Universal Remote original	Fernb-uni-V3
Air filter compatible	Alternative zu:MZ7A / 910 330 7184
Remote control original	9450871468 / CXTK
Air filter original	MZ7A / 910 330 7184
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16435>

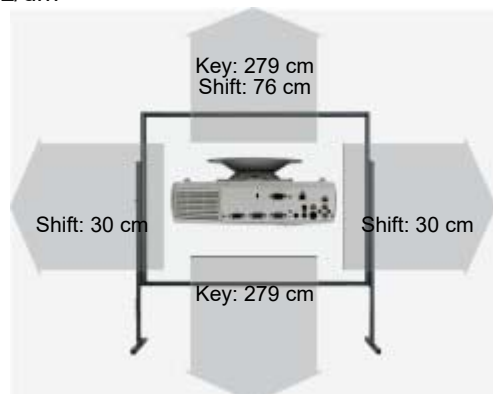

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-23661 (T11)	3.43-5.43:1	7-11 m	50%	+/-15%	Powered
AH-23541 (T10)	2.16-3.46:1	4.4-7 m	50%	+/-15%	Powered
AH-23511 (W10)	1.26-1.64:1	2.6-3.3 m	50%	+/-15%	Powered

Fix Optional Lenses

AH-23631 (W11)	0.82:1	1.7 m	0.0% Fix
----------------	--------	-------	----------

Status 2006 Discontinued (EOL) // Last update of the data: 2023-10-26

Data





HCinema

<https://www.projector-database.com/pro/eikixg250-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.