

eLux EX2020



I/O Side View

Brief Introduction
Beta 2.5

A brief introduction to the eLux EX2020. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 500:1. The projector can illuminate images up to 408 cm wide thanks to its 2200 Ansi lumens. In room light, however, the picture width should ideally be less than 272 cm. The projector was launched in 2005 and is no longer sold by the manufacturer.

Display Type

3 x 0,7" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2200

733 Lux (bei 200 cm Screen)

Contrast

500:1

500:1

Black Level
Offset

4,4000 min. Lumen

1,475 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

180W NSH Lamp
Articel Nr.: LMPf16602

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

-

Throw Ratio

-

Audio

2W


Connections

D-sub 15pin in und out
Cinch Video in
S-Video in
Mini Jack
USB
RS232C



Ceiling Mounting

Yes

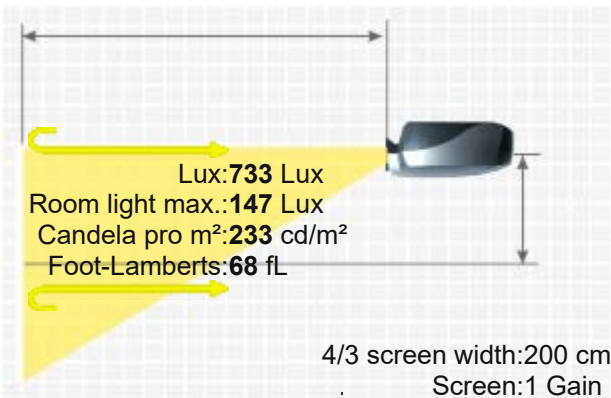

Power	-
Size WxHxD	310 x 96 x 270 mm (12,2"x3,8"x10,6") 8,04 L/dm³
Operating Noise	33 / 30 dB in Eco Mode
Weight	2,72 kg / 6 lbs.
Keystone	Vert.: +/-30° automatisch
Illumination	-
Frequenz	-
Foot-Lamberts	68 fL / max. 408 cm screen width 233 cd/m²
Features	■ Freeze ■ Eco Mode ■ Automatic and manual vertical keystone correction ■
Status	2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/eluxex2020-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.