

eLux LX600



E L U X L X 6 0 0



A brief introduction to the LX600: The eLux LCD projector offers 4500 Ansi-Lumen, a contrast of 500:1 and an XGA 1024 x 768 resolution. An image width of up to 584 cm is possible, if the image width is smaller (we recommend max. 389 cm), rooms with residual light are also no problem. It came onto the market in 2008 and is no longer offered by the manufacturer eLux.



3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

4500
500:1 full on/off
9,0000 min. Lumen

Screen

1500 Lux (bei 200 cm Screen)
500:1 full on/off
3,018 min. Lumen

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

275W NSH Lamp

Articel Nr.: LMP-111

-

-

Manual

Manual 1,2

F=1,7-1,9 f=24,0-28,8 mm

1,47-1,78:1

1 x 8W Mono

DVI-I in

D-sub 15 pin in und out

5 x BNC RGBHV in

YUV in

S-Video in

Cinch Video in

Mini Jack Audio in und out

RS232C Din 9 pin in


USB Typ B

Yes

-

480 x 152 x 360 mm (18,9"x6"x14,2") 26,27 L/dm³

33 / 30 dB in Eco Mode

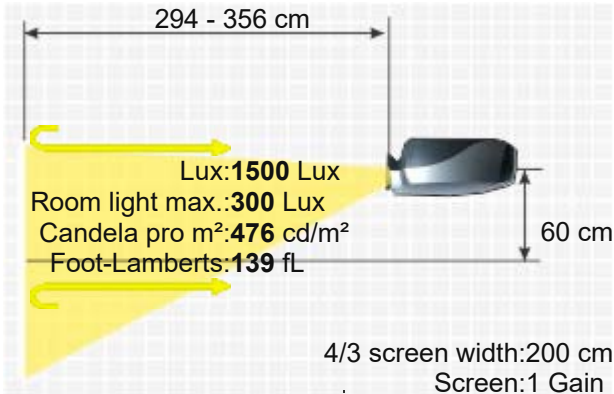

Weight

Keystone

Illumination

7,50 kg / 16,53 lbs.

Vert.: +/-30° automatisch

85%

Frequenz

H-sync: 15-107 kHz
V-sync: 10-120 Hz
Range max.: 170 MHz

Foot-Lamberts

139 fL / max. 584 cm screen width

476 cd/m²

- Eco Mode
- Automatic and manual vertical keystone correction
- Optional LAN network compatible.

Features

Status

2008 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/eluxlx600-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.