

Enthronic E950X



ENTHRONIC E950X



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

The standard portable E950X LCD has 2000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. Due to the brightness of 2000 Ansi lumens, a picture width of 389 cm is possible. In room light, the picture should be max. 259 cm wide. This model is no longer offered by Enthronic.



3 x 0,9" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

Projector

2000

400:1 full on/off

5,0000 min. Lumen

647 Lux (bei 203 cm Screen)

400:1 full on/off

1.63 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

HDTV,480p,720p,1080i,NTSC / NTSC4.43 / PAL / PAL-M / PAL-N / SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W UHL Lamp

2000 h.

-

Manual

Manual 1,3

F=1,7 f=38-49 mm

2,08-2,68:1

1 x 1W

D-sub 15pin input HDB15 Female x 2 (2 , when passthrough is disable ,default 1)

Monitor Output HDB15 Female x1(When passthrough is enable)

Video Input RCA (C-Video), Mini-Din (S-Video)

Audio Input Stereo Jack x 2(PC), RCA Jack x2 (Video)

Audio Output Stereo Jack x1

Control I/O 8 Pins Din, Female x 2

Power Input 3 Pins Jack

Yes

210W standby: 15W

305 x 87 x 240 mm (12"x3,4"x9,4") 6,37 L/dm³

38dB

3,70 kg / 8,16 lbs.

Vert.: +/-15°



90%

H-sync: 15,6-91 kHz

V-sync: 50-100 Hz

60 fL / max. 389 cm screen width

206 cd/m²

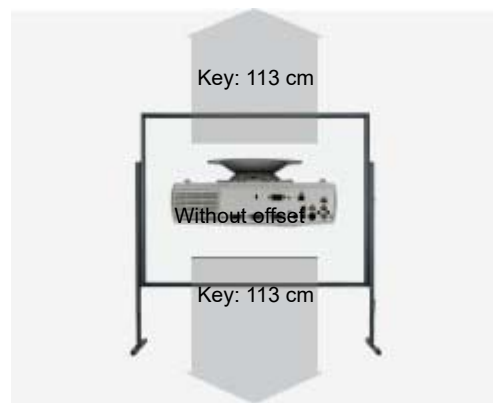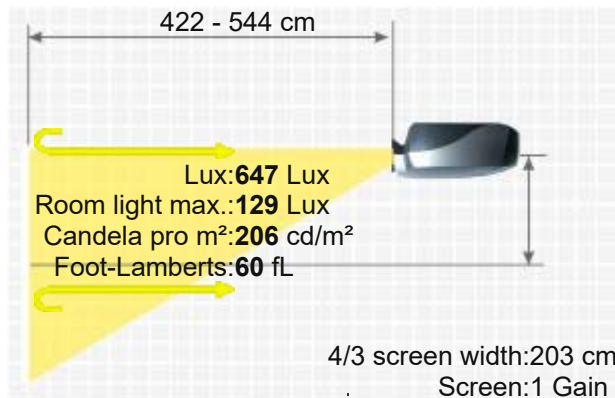

Features
Status

■ 3:2 pull down
- Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/enthronice950x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.