

Epson EB-PU2010W/B

EPSON EB-PU2010W/B



The stationary EB-PU2010W/B Laser LCD has 10000 Ansi-Lumen, a contrast of 2500000:1 and a resolution. Due to the laser, the projector is specified with 20000 hours of light life, which is over 13.7 years if enjoyed for four hours a day. The built-in lens shift and keystone correction function provides freedom when adjusting the projection. 10000 Ansi lumens ensure that a picture width of 1016 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 677 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Video signals 1080P and 4K (compressed) are also no problem for the projector.



3 x 1,03" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

10000 / 7000 im Eco Mode
2500000:1 full on/off
0,0040 min. Lumen
Vert.: +/-60% Hori.: +/-18%

WUXGA 1920 x 1200 2.304.000 Pixel

UHD (4K2K) 3840 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Articel Nr.: ELPAF46 / V13H134A46

20000 h. / 30000 h. in Eco Mode

0,00 € Laser

Powered


Powered

optional

optional

-

4444 Lux (bei 200 cm Screen)
2500000:1 full on/off
0,002 min. Lumen

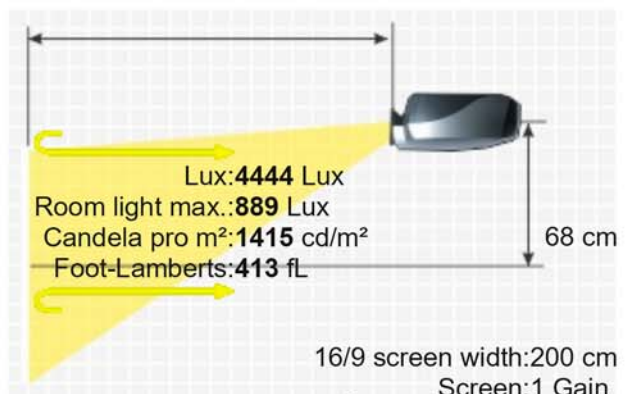

HDMI in
DVI in
D-sub 15pin in
USB Typ A, B
Mini Jack Audio in und out
RJ45 in
HDBaseT in
3G-SDI in und out




Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
535 / 452W in Eco Mode
545 x 189 x 436 mm (21,5"x7,4"x17,2") 44,91 L/dm³
37 / 30 dB in Eco Mode

Weight
Keystone
Illumination

16,80 kg / 35,27 lbs.
Vert.: +/-45°
Hori.: +/-30°
85%

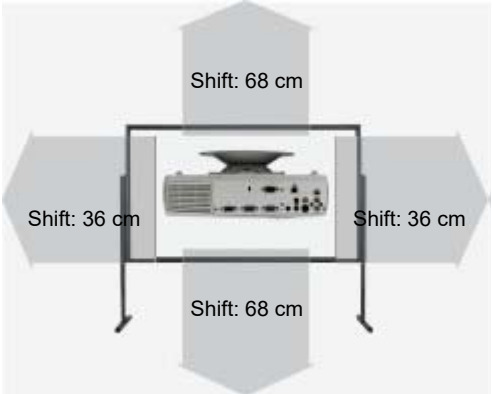

Frequenz
Foot-Lamberts

413 fL / max. 1016 cm screen width
1415 cd/m²
■ Full HD 1080P compatible
■ Lens shift Funktion
■ Eco Mode
■ Kensington Slot
■ High Dynamic Range (HDR)
■ Warping
■ 24/7 continuous operation capable
■ Edge Blending

Features

■ Password protection
■ PJLink™
■ Control via web browser
■ Wi-Fi network compatible.
■ Lan network compatible.
■ Crestron®-Software compatible.
■ DICOM Simulation
■ The EB-PU2010W features
■ NFC for multi-projector installations, simplifying setup with Epsoms
■ Projector Config Tool.

Optional

Object lens original	V12H004W05 / ELPLW05
Object lens original	V12H004UA3 / ELPLU03S
Object lens original	V12H004U03 / ELPLU03
Object lens original	V12H004M0B / ELPLM11
Object lens original	V12H004M0A / ELPLM10
Object lens original	V12H004L08 /NELPLL08
Object lens original	ELPLW08 / V12H004W08
Object lens original	ELPLW06 / V12H004W06
Object lens original	ELPLU04 / V12H004U04

Object lens original ELPLM15 / V12H004M0F
Object lens original ELPLL08 / V12H004L08
Air filter original ELPAF46 / V13H134A46
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=hc1363>

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ELPLW08	0.86-1.21:1	1.7-2.4 m	+/-60%	+/-18%	Powered
ELPLW06	1.19-1.62:1	2.4-3.2 m	+/-60%	+/-18%	Powered
ELPLW05	0.77-1.07:1	1.5-2.1 m	+/-24%	+/-10%	Powered
ELPLU04	0.64-0.77:1	1.3-1.5 m	+/-60%	+/-18%	Powered
ELPLU03S	0.48-0.57:1	1-1.1 m	+/-24%	+/-10%	Powered
ELPLM15	1.57-2.56:1	3.1-5.1 m	+/-60%	+/-18%	Powered
ELPLM11	3.54-5.41:1	7.1-10.8 m	+/-60%	+/-18%	Powered
ELPLM10	2.42-3.71:1	4.8-7.4 m	+/-60%	+/-18%	Powered
ELPLL08	5.27-7.41:1	10.5-14.8 m	+/-60%	+/-18%	Powered

Fix Optional Lenses

ELPLX02S	0.35:1	0.7 m	70-45%	+/-15%	No Zoom
----------	--------	-------	--------	--------	---------

Status 2021 Current model // Last update of the data: 2024-10-02
Created: 2021-04-15 13:06:18

Data



More Details



HCinema

<https://www.projector-database.com/pro/epsonebpu2010w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.