

Geniesys OptiMax i




GENIESYS OPTIMAX I



LED
4 4/3 Ti Digital Light Processing Chip

Display Type	14	5 Lux (bei 200 cm Screen)
Ansi-Lumen	-	-
Contrast	-	-
Black Level	-	-
Offset	-	-
Resolution	480 x 240	
	115.200 Pixel	
Video Modes	PAL, SECAM, NTSC	
Application	Game-Portabel Very portable, small-screen projections. Very narrow picture width and rooms with very little light.	
Light Source	8W LED	
Light Life	50000 h.	
Operating Costs	0,00 € LED	
Focus	Manual	
Zoom	Manual 1,2	
Objective	-	
Throw Ratio	1,76-2,12:1	
Audio	1 x 1W	
Connections	Cinch Video in Cinch Stereo in Mini Jack Audio in	
Ceiling Mounting	Yes	
Power	18W	
Size WxHxD	110 x 55 x 180 mm (4,3"x2,2"x7,1") 1,09 L/dm³	
Operating Noise	-	

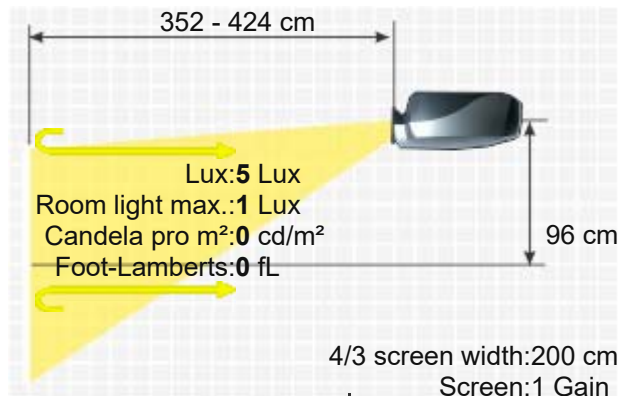

Weight	1,20 kg / 2,65 lbs.
Keystone	Vert.: +/-20°
Illumination	-
Frequenz	-
Foot-Lamberts	-
Features	-
Status	-
Data	- Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/geniesysoptimax-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.