

Multimedia Projector

Premium Performances

"is design to make it easy to use and maintain"



Super Quality Images

Design for tough Environment

User Own Start up Screen (Logo Capture)

High Security of Advance Anti-Theft Feature

Multi-language on Screen Display include Thai

Easy Installation & Maintenance even when Ceiling



GYGAR®
be visual, be vision

www.gygar.com



Model	GP 225	GP 258	GP 478	GP 578/GP 578p
Optical				
Projection system	3 LCD technology with EPSON HTPS TFT LCD			
Brightness	2800 lumens	3200 lumens	3600 lumens	4000 lumens
Contrast ratio	1000:1	1000:1	800:1	800:1
Resolution	Native: XGA (1024 x 768)			
	Maximum: UXGA (1600 x 1200)			
	Aperture ratio: 4:3 native / 16:9 compatible			
Projection lens	1.2X Zoom lens, f=18.53 - 22.18mm, F/1.65 - F/1.93			
Lamp (Ultra High Pressure Lamp)	200W	200W	220W	230W
Lamp Life	2500 Hours (Nomal Mode) / 3000 Hours (Eco. Mode)			
Fan Noise	33dB @ ECO			
Throw distance	1.11-10.57m (Approx.100" at 2.88M)			
Display Size	20" - 300"			
Signal				
Scan rate	Horizontal 31 to 92 kHz ; Vertical 48 to 120 Hz			
Color system	NTSC / NTSC 4.43 / PAL (including PAL-M,N) / SECAM/PAL60			
Video signals compatibility	480i/p, 576i/p, 720p, 1080i			
PC signals compatibility	VGA, SVGA, XGA, SXGA, WXGA, UXGA			
Keystone correction	Vertical +/- 30°			
Inputs / Outputs				
Input terminals	RGB: Mini D-sub 15 pin x 1, DVI-I x 1			
	Composite Video: RCA x 1, S-Video x 1			
	Audio: mini jack x 2 , RCA(L,R) x 1			
	Component Video: RCA x 3			
Output terminals	RGB: Min D-sub 15 pin x 1 Audio: mini jack x 1			
Mouse control port	USB type B x 1			
Control terminals	RS-232C D-sub 9 pin x 1			
LAN (RJ45)	Optional			GP 578p Built-in
Speaker				
Built-in Speaker	Mono 8W X 1			
Enhanced Features				
	Adjustment : on Board / Remote /RS 232 Key Stone Adjustment : Vertical +/- 30 Degree 6 Auto Function - Auto Search / Auto Sync. / Auto Keystone / Auto Ceiling / Auto Filter Alert / Auto Lamp Alert Zoom : 4X Digital Zoom /Pan Image Freez Quick Start and turn off : 10 seconds 7 Display Mode - Natural / Cinema / Green Board / Black Board / White Moard /Day Light / Users			
Security System				
Mechanical Security System	Metal Anchor Lock Kensington Lock			
Electrical Security System	Password Pin Lock			
Maintenance System				
	Side Change Lamp / Side Change Filter			
OSD Language	17 Language (include Thai)			
Dimensions (WxHxD)	325 x 97 x 260 mm			
Net Weight	3.4 kg			
Power requirement	AC 100 to 240 V, 50/60 Hz			
Power consumption	Max. 285W	Max. 285W	Max. 310W	Max. 310W
	Green Power Compliance System < 2.6W @ Standby Mode			
Standard Accessories				
Remote control	Card Type Mouse Control with Laser Pointer (option)		Mouse Control with Laser Pointer	
Cable & Manual	AC power cord (1.8M)			
	VGA cable (1.5M)			
	Owner's Manual CD			
	Quick Start Guide			

Design to make it easy



Premium Series GP 478/GP578



Optimize Series GP 225/GP 258

Full Port and Function



Easy to Maintenance




Side Change Lamp



Side Change Filter

Superb Quality Image

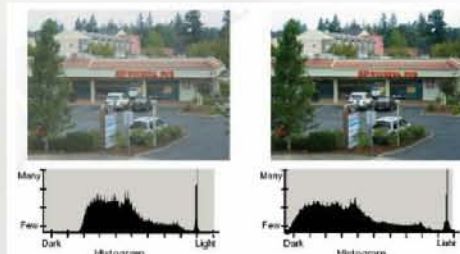

Sharper Scaling Technology
Motion Adaptive De-Interlacing (SD) System

Optional For Tough Environment



Compact and Heavy Duty
Anti-Dust Filter
(Optional)

- Dust Proof Glass
- Dust Cover for Zoom Lever
- Large Electrostatic Filter

Regulations



Remark : Design and Specifications subject to change without notice