

Hitachi CP WU8450

HITACHI CP WU8450



The Hitachi CP WU8450 LCD projector has 5000 Ansi-Lumen, a contrast of 3000:1 and a WUXGA 1920 x 1200 resolution. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. The projector also offers a lens shift function, which makes image adjustment childs play. The projector will be able to illuminate a picture width of 718 cm. The projector can create rooms with residual light with a smaller image width, we would recommend a maximum of 479 cm here. The model built in 2012 is no longer offered by Hitachi.

 3 x 0,76" LCD TFT Panel
WUXGA 16/9 Liquid Crystal Display

Projector 5000 / 3500 im Eco Mode
3000:1 full on/off
1,6667 min. Lumen
Vert.: +55% -0% Hori.: +/-10%

Screen 2222 Lux (bei 200 cm Screen)
3000:1 full on/off
0,741 min. Lumen

Resolution
WUXGA 1920 x 1200
2.304.000 Pixel

Video Modes
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: • JPEG (.jpeg, .JPEG) • Bitmap (.bmp) • PNG (.png) • GIF (.gif) • Movie (.avi, .mov)

Application
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source
330W UHP Lamp

Light Life
Articel Nr.: DT01291

2500 h. 3000 h. in Eco Mode

Operating Costs
4,27% / 0,14 €

Focus
Powered


Zoom
Powered 3

Objective
-

Throw Ratio
1,0-3,0:1

Audio
2 x 8W

Connections
2 x HDMI in
5 x BNC RGBHV in
2 x D-sub 15 pin in
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ A,B in

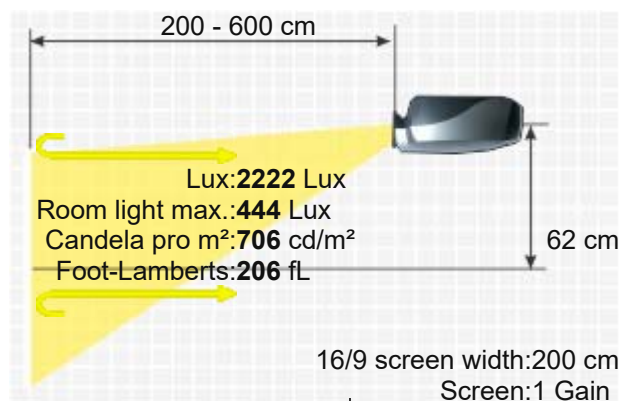

Brief Introduction
Beta 2.5

Mini Jack Audio in und out
RS232C Din 9 pin
RJ45 in



Ceiling Mounting Yes
Power 355W
Size WxHxD 498 x 135 x 396 mm (19,6"x5,3"x15,6") 26,62 L/dm³
Operating Noise 37 / 31 dB in Eco Mode

Weight 8,62 kg / 19 lbs.
Keystone Vert.: +/-35° automatisch
Illumination -

Frequenz -

Foot-Lamberts 206 fL / max. 718 cm screen width
706 cd/m²


Features

- Lens shift Funktion
- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- 360° installable
- Password protection
- PJLink™
- Control via web browser
- Lan network compatible.
- Crestron®-Software compatible.
- Picture-by-picture
- DICOM support.

Optional

Air filter original	UX38241
Object lens original	UL-705
Object lens original	SL-702
Air filter original	MU06642
Object lens original	ML-703
Object lens original	LL-704
Remote control original	HL02801 / R100
Object lens original	FL-701
Lamp original	DT01291

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fie11950>

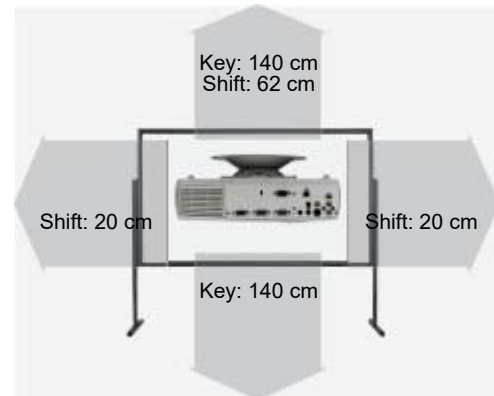

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
UL-705	5.2-8.7:1	10.4-17.4 m	50%	+/-10%	Powered
SL-702	1.3-1.9:1	2.6-3.8 m	50%	+/-10%	Powered
ML-703	1.6-3.2:1	3.2-6.4 m	55%	+/-10%	Powered
LL-704	3.1-5.2:1	6.2-10.4 m	50%	+/-10%	Powered
Fix Optional Lenses					
FL-701	0.9:1	1.8 m	0.0% Fix		No Zoom
Status	2012 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data



More Details



H Cinema

<https://www.projector-database.com/pro/hitachicpwu8450-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. H Cinema is not responsible for any errors or omissions contained in product descriptions.