

Hitachi CP WX11000

HITACHI CP WX11000



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

With the CP WX11000, manufacturer Hitachi offers an LCD projector with WXGA 1366 x 800 resolution and a contrast of 2500:1. The integrated lens shift provides freedom when positioning the projector. An image width of up to 658 cm is possible if the image width is smaller (we recommend max. 439 cm), rooms with residual light are also no problem. It is also Full HD 1080P compatible. The model built in 2008 is no longer offered by Hitachi.



3 x 1,22" LCD TFT Panel
WXGA 17/10 Liquid Crystal Display

Projector

6500

2500:1 full on/off

2,6000 min. Lumen

Vert.: +/-127% Hori.: +/-61%

WXGA 1366 x 800

1.092.800 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

350W UHB Lamp

Articel Nr.: DT01001

2000 h.

-

Powered

Powered

optional

optional

-


HDMI in
DVI-D in
2 x D-sub 15 pin in 1 x out
YUV in
S-Video in
Cinch Video in
RJ45 in
RS232C

Screen

2775 Lux (bei 200 cm Screen)

2500:1 full on/off

1,111 min. Lumen

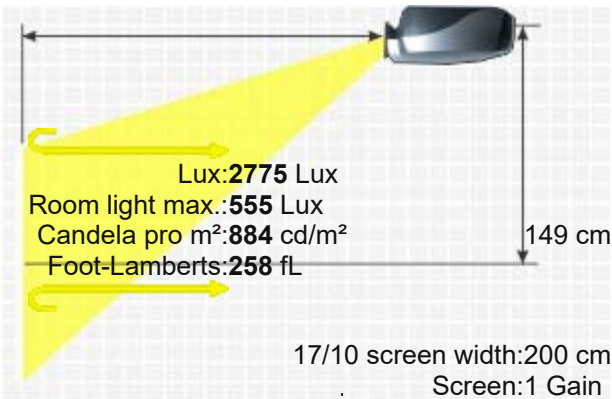



Ceiling Mounting
Power
Size WxHxD
Operating Noise


Yes
-
476 x 272 x 469 mm (18,7"x10,7"x18,5") 60,72 L/dm³
-

Weight
Keystone
Illumination

13,10 kg / 28,88 lbs.
Vert.: +/-40°
Hori.: +/-20°
-

Frequenz
Foot-Lamberts

-
258 fL / max. 658 cm screen width
884 cd/m²

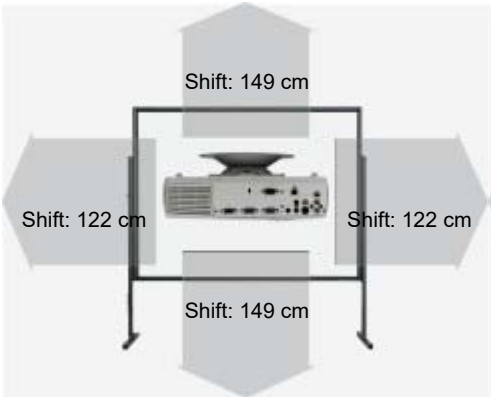

Features

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
-

Optional


Lamp ruby	Ruby-LMP18809
Lamp original	DT01001
Compatible lamp	LMP-K18807
Universal Remote original	Fernb-uni-V3
Object lens original	SL-802
Object lens original	SL-803
Object lens original	USL-801
Remote control original	HL02198
High performance air filter original	MU06351 / 003-002722-01 / SP-FILTER-01
Ceiling Mount 220	Halterung45

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d18808>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
USL-801	0.5-0.6:1	1-1.2 m	0.0% Fix		No Zoom
SL-806	5-9.2:1	10-18.4 m	+/-87%	+/-58%	Powered
SL-805	2.8-5.2:1	5.6-10.4 m	+/-87%	+/-58%	Powered
SL-804	2.2-2.9:1	4.4-5.8 m	+/-87%	+/-58%	Powered

SL-803	1.5-2.2:1	3-4.4 m	+/-87%	+/-58%	Powered
SL-802	1.2-1.5:1	2.4-3 m	+/-87%	+/-58%	Powered
Status	2008 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data

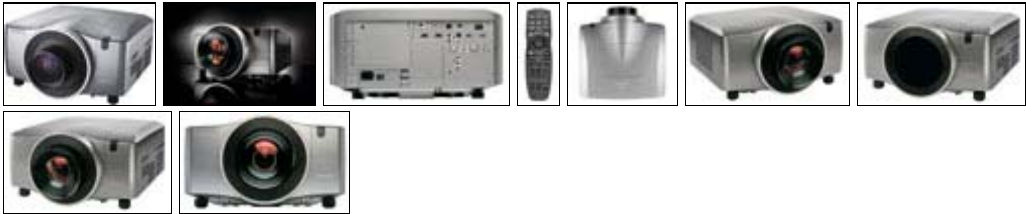

More Details



HCinema

<https://www.projector-database.com/pro/hitachicpwx11000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.