

Hitachi CP X10000

HITACHI CP X10000



The Hitachi CP X10000 LCD projector has 7500 Ansi lumens, a contrast of 2500:1 and an XGA 1024 x 768 resolution. The integrated lens shift gives freedom when positioning the projector. The projector will be able to illuminate an image width of 754 cm well. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 503 cm here. Playing 1080P is also no problem for the projector. This model is no longer offered by Hitachi.

Brief Introduction

Beta 2.5

Display Type



3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

7500

2500 Lux (bei 200 cm Screen)

Contrast

2500:1 full on/off

2500:1 full on/off

Black Level

3,0000 min. Lumen

1,001 min. Lumen

Lens shift

Vert.: +/-87% Hori.: +/-58%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

350W UHB Lamp

Articel Nr.: DT01001

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

-

Connections

HDMI in

DVI-D in

2 x D-sub 15 pin in 1 x out

YUV in

S-Video in

Cinch Video in

RJ45 in

RS232C





Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
-
476 x 272 x 469 mm (18,7"x10,7"x18,5") 60,72 L/dm³
-

Weight
Keystone
Illumination

13,10 kg / 28,88 lbs.
Vert.: +/-40°
Hori.: +/-20°
-

Frequenz

-

Foot-Lamberts


232 fL / max. 754 cm screen width
795 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Lens shift Funktion
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable
-

Features

- Lamp ruby Ruby-LMP18809
- Lamp original DT01001
- Compatible lamp LMP-K18807
- Universal Remote original Fernb-uni-V3
- Object lens original SL-802
- Object lens original SL-803
- Object lens original USL-801
- Remote control original HL02198
- High performance air filter original MU06351 / 003-002722-01 / SP-FILTER-01
- Ceiling Mount 220 Halterung45

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d18807>

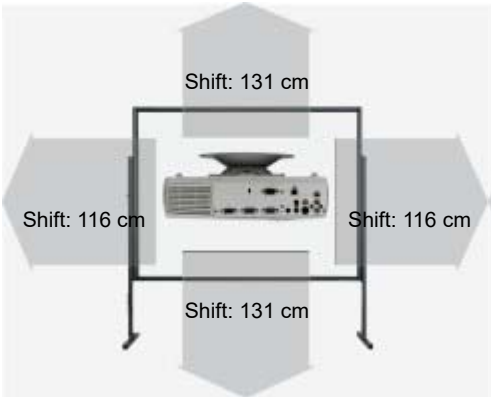

Optional

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
USL-801	0.5-0.6:1	1-1.2 m	0.0% Fix		No Zoom
SL-806	5-9.2:1	10-18.4 m	+/-87%	+/-58%	Powered
SL-805	2.8-5.2:1	5.6-10.4 m	+/-87%	+/-58%	Powered
SL-804	2.2-2.9:1	4.4-5.8 m	+/-87%	+/-58%	Powered

SL-803	1.5-2.2:1	3-4.4 m	+/-87%	+/-58%	Powered
SL-802	1.2-1.5:1	2.4-3 m	+/-87%	+/-58%	Powered
Status	2008 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data



More Details



HCinema

<https://www.projector-database.com/pro/hitachicpx10000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.