

Hitachi CP X608

HITACHI CP X608



With the CP X608, manufacturer Hitachi offers a stationary LCD projector with XGA 1024 x 768 resolution and a contrast of 1000:1 in theater mode. The integrated media player can play files directly. Includes a lens shift and keystone correction function, which provides freedom during installation. Thanks to the brightness of 4000 Ansi lumens, a picture width of 551 cm is possible. The projector will also cope with slightly brighter rooms with a smaller picture width (we recommend max. 367 cm). It was launched in 2006 and is no longer offered by the manufacturer Hitachi.

Brief Introduction

Display Type

3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

4000 / 3200 im Eco Mode

Contrast

1000:1 full on/off im Theatre Mode

Black Level

4,0000 min. Lumen

Lens shift

Vert.: +50% -0% Hori.: +/-10% manuell

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: JPEG BMP PNG GIF MPEG4

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

285W UHB Lamp

Light Life

Articel Nr.: DT00771

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-2,1 f=24,3-29,2 mm

Throw Ratio

1,5-1,8:1

Audio

4 x 4W

Connections

1 x DVI M1DA

2 x D-sub 15En in 1 x out


YUV in

S-Video in


Cinch Video in

Cinch Stereo in

Mini Jack in und out

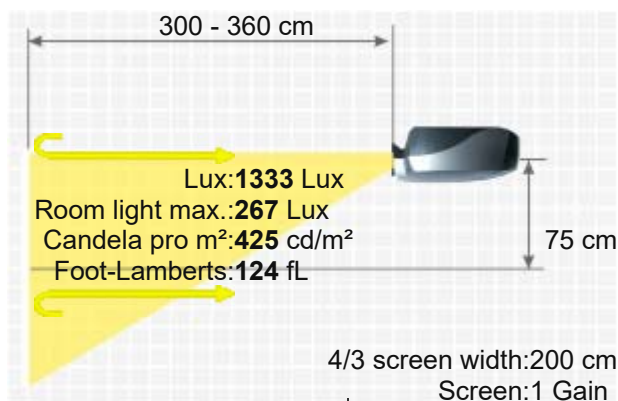

RJ45
SD memory Card Reader

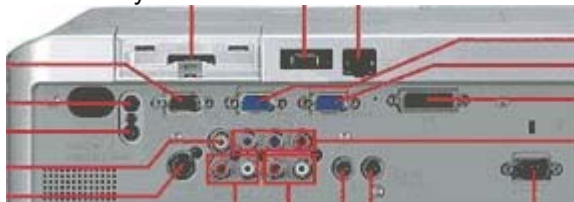

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
460W
420 x 139 x 319 mm (16,5"x5,5"x12,6") 18,62 L/dm³
39 / 33 dB in Eco Mode

Weight
Keystone
Illumination

7,00 kg / 15,43 lbs.
Vert.: +/-40°
Hori.: +/-20°
-

Frequenz

H-sync: 31,5-106 kHz
V-sync: 56-120 Hz

Foot-Lamberts

124 fL / max. 551 cm screen width
425 cd/m²

Features

- Direkt Power Off
- Lens shift Funktion manuell
- Integrated Mediaplayer
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- Dynamic iris
- Password protection
- Remote control with laser pointer und mouse control
- Control via web browser
- Wi-Fi network compatible.
- Lan network compatible.
- Overscan adjustable
- De-interlacer with 3:2 pull down..


Please note

Im Vergleich zum CP X605 hat der 608 W-Lan und einen SD-Card Reader.
Alle anderen Daten sind gleich.

Optional

Bulb only	NLMP5062
Lamp ruby	Ruby-LMP5062
Lamp incl. air filter original	DT00771
Compatible lamp	LMP-K16584
Remote original	HL02881- R016F / HL03032 - R017H / HL02483
Air filter original	MU03642
Ceiling Mount 100-120	Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16584>

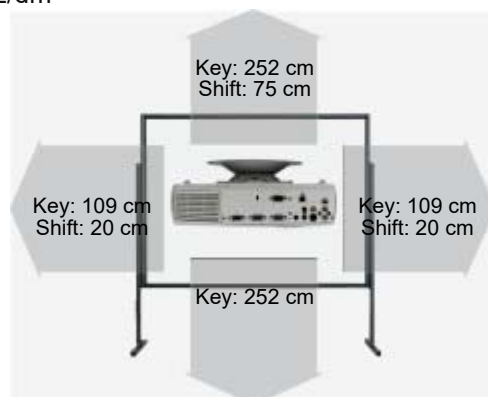

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
UL-604	4-7.48:1	8-15 m	50%	+/-10%	Manual
SL-602	1.25-2.01:1	2.5-4 m	50%	+/-10%	Manual
LL-603	2.04-3.93:1	4.1-7.9 m	50%	+/-10%	Manual
Fix Optional Lenses					
FL-601	0.79:1	1.6 m	0.0% Fix		No Zoom

Status
Data

2006 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/hitachicpx608-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.