

InFocus IN5316HDa

INFOCUS IN5316HDa



With the IN5316HDa, manufacturer InFocus offers a DLP projector with HDTV 1920 x 1080 resolution and a contrast of 2000:1. The projector also offers a lens shift function that makes image adjustment child's play. The projector can illuminate images up to 718 cm wide thanks to its 5000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 479 cm. The projector can also play 1080P and 3D without any problems. The model built in 2014 is no longer offered by InFocus.



1 x 0,65" DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

5000

2000:1 full on/off

2,5000 min. Lumen

Vert.: +35% -0% Hori.: +/-5%

HDTV 1920 x 1080

2.073.600 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

370W UHP Lamp

Articel Nr.: SP-LAMP-090

1500 h. 2000 h. in Eco Mode

-

Manual

Manual 1,25

-

1,54-1,93:1

2 x 3W

HDMI 1.4 in

DVI-D in

2 x D-sub 15 pin 1 x out

5 x BNC RGBHV in

YUV in

S-Video in

Cinch Video in

USB Typ B

2222 Lux (bei 200 cm Screen)

2000:1 full on/off

1,112 min. Lumen

Vert.: +35% -0% Hori.: +/-5%

HDTV 1920 x 1080

2.073.600 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

370W UHP Lamp

Articel Nr.: SP-LAMP-090

1500 h. 2000 h. in Eco Mode

-

Manual

Manual 1,25

-

1,54-1,93:1

2 x 3W

HDMI 1.4 in

DVI-D in

2 x D-sub 15 pin 1 x out


5 x BNC RGBHV in

YUV in

S-Video in

Cinch Video in

USB Typ B

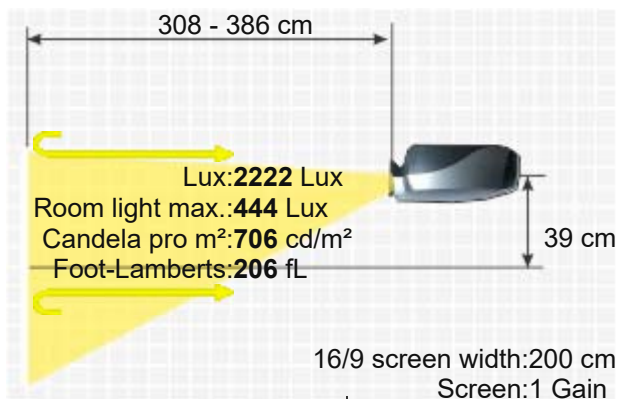

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RJ45 in
RS232C
3D Sync Out
Yes
450 / 340W in Eco Mode
430 x 175 x 338 mm (16,9"x6,9"x13,3") 25,43 L/dm³
34 / 31 dB in Eco Mode

Weight
Keystone
Illumination

8,60 kg / 18,96 lbs.
Vert.: +/-40°
-

Frequenz


H-sync: 15-106 kHz
V-sync: 50-120 Hz

Foot-Lamberts

206 fL / max. 718 cm screen width
706 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- Eco Mode
- Gamma correction
- Digital image shift
- 24/7 continuous operation capable
- BrilliantColor™
- Control via web browser
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Overscan adjustable
- Crestron®-Software compatible.
-

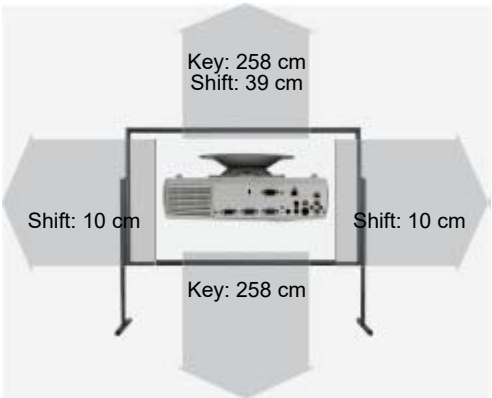

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Long Throw Lens	1.93-2.89:1	3.9-5.8 m	40%	+/-5%	Manual
Fix Optional Lenses					
Short Throw Lens	0.77:1	1.5 m	0.0% Fix		No Zoom

Status
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2014-08-13 12:27:51

Data



More Details



HCinema

<https://www.projector-database.com/pro/infocusin5316hda-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.