


IN5500 (SERIES)

InFocus
Bright Ideas Made Brilliant

Dynamic Design for High-End Installations

Elegant Styling – Stunning Image Quality
Flexible Installation – Dual-Lamp 24/7 Operation

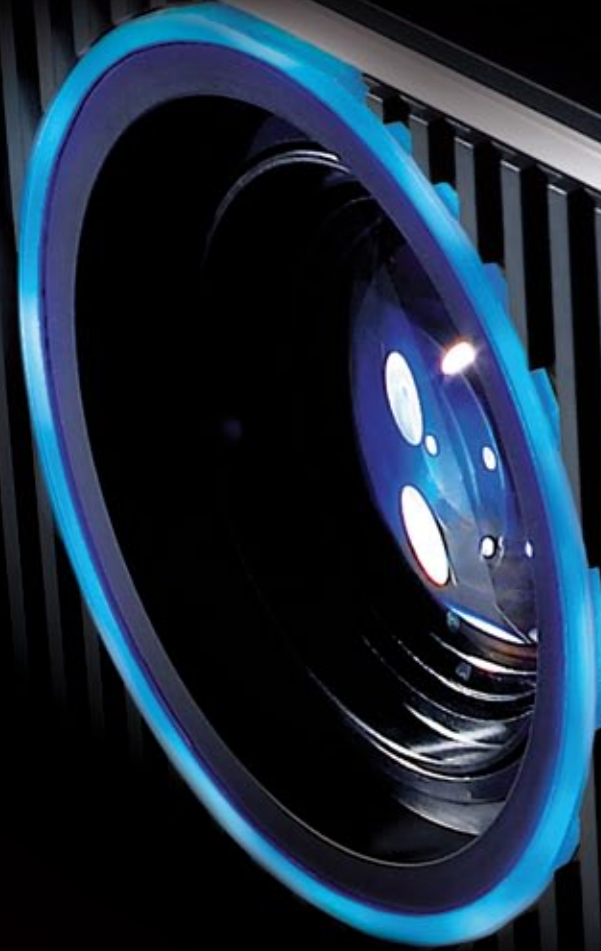

IN5500 (SERIES)

Leading the way with HD colour performance and installation flexibility

The IN5500 series is leading the way in the installation category with an incredible balance of colour performance, brightness, features and ease of use.

The IN5500's 6-segment colour wheel not only displays an incredibly wide palette but produces lifelike images with smooth gradations. Add our BrilliantColor™ implementation and 6000 lumens of brightness and you get crisp, seamless, film-like images even in rooms with high ambient light.

Lens shift, automatic keystone correction, five lens options and full analogue and digital connectivity make the IN5500 series the smart choice for demanding professional applications. Plus, its elegant design, customisable skins and cable management system will complement the style of any venue.

Why choose the IN5500?

- Five lens options and lens shift for flexible projector placement
- Dual lamps and filter-free, 24/7 operation provide fail-safe backup
- 6-segment colour wheel for an incredibly wide colour gamut
- Very quiet so to not distract from your viewing experience
- 6000 lumens of brightness for bright, clear images in high ambient light
- Customisable skins to fit any décor

High Brightness and High Definition Colour

High Definition, Brilliant Colour

The IN5500 series delivers a stunning combination of HD resolution and vivid detail in true-to-life colours with a 6-segment colour wheel, the latest DLP® DarkChip™ technology and the InFocus BrilliantColor implementation.



IN5533L


WXGA (1280 × 800) resolution

IN5535L

WUXGA (1920 × 1200) resolution

High Performance Optics

Built-in horizontal and vertical lens shift allows mechanical alignment without optical distortion to retrofit legacy installations. Automatic sensors for ceiling detection and keystone means you will have a crisp, square image everytime. Pincushion and Barrel Distortion is eliminated, enabling the IN5500 series to project perfect images even on imperfect surfaces.

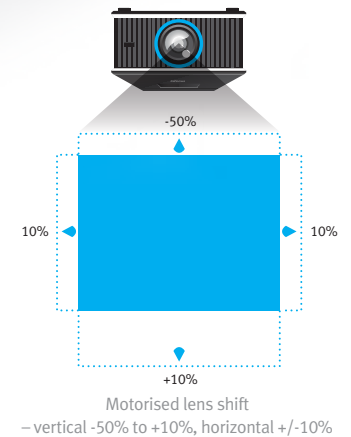

High Resolution WXGA/WUXGA

With WXGA (1280 × 800) and WUXGA (1920 × 1200) native resolutions, the IN5500 series offers substantially wider space to display high resolution images for the next generation of operating systems and full high definition 1080p video.



Dual Lamps: High Brightness and Fail-Safe Protection

Both IN5500 models come with dual lamps for high brightness of 6000 lumens and fail-safe backup protection. And they're filter-free for low maintenance and hours of worry-free use.

Interchangeable Lenses

Interchangeable lenses provide greater flexibility for a large variety of applications – from short throw to ultra long throw projection.



Full Digital, Wireless and Network Connectivity

Full Digital and Analogue Connectivity

The IN5500 series features full analogue and digital connectivity, including HDMI 1.3, VGA, USB, BNC and component inputs. The IN5500 series also includes embedded networking for full remote projector control and management.

SplitScreen™

Project images from 2 sources simultaneously and in a variety of configurations with InFocus SplitScreen technology – perfect for viewing multiple presentations, videoconferencing and distance learning.



Optional Wireless Connectivity

The optional InFocus LiteShow III™ wireless adaptor connects personal computers to InFocus projectors wirelessly. The latest 802.11n connection supports simultaneous transmission of audio, video, and data content and is compatible with PC, Mac, iPhone/iPad and Windows Mobile operating systems.

Projector Management

The IN5500 series' built-in web control panel allows network administrators to remotely access and control the projector over standard LAN/WAN. The series is also compatible with ProjectorNet™ 3.0, our free asset management software that enables you to conserve projector lamp life by scheduling on/off times and presetting maintenance events and anti-theft security alerts.

Control It Your Way

Use the RS232 port to add the IN5500 series to your room control system such as Creston, AMX, SPcontrols and others. Or, use the RJ45 port to interface with your network control system such as Crestnet, AMX Device Discovery and InFocus ProjectorNet.

Dynamic Messaging System

Send dynamic messages for instant display to InFocus projectors using the InFocus Dynamic Messaging System (DMS) – perfect for announcements such as schedule changes, weather warnings, breaking news, and emergency notifications.



Design for Professional Installation

Design for Professional Installation

Choose your cover. With options in Matte Black, Matte White, Glossy Black and Wood Grain, the IN5500 series provides the design flexibility you need for the perfect installation.

Plus, our pre-primed skin allows you to create your own custom design. Add your company logo, express your individuality, or blend it in beautifully with your unique décor.



Unique Cable Management System

The integrated cable management system provides easy access to the connector panel, while aligning each cable to the cable router.

The result: 100% hidden cables that look as good as the rest of your room.



Optional Accessories

Projection Screens
Cables & Adaptors
Security Lock (SEC-LOCK-01)
Replacement Lamp #1 (SP-LAMP-055)
Replacement Lamp #2 (SP-LAMP-056)
Replacement Lamp Bundle:
Lamps #1 and #2 (SP-LAMP-IN55B)
LiteShow III Wireless Adaptor (INLITESHOW3)
Ceiling Mount (SP-CEIL-INSTALL)
Commander Remote (HW-COMMANDER-2)
Short Throw Fixed Lens (LENS-050)
Short Throw Zoom Lens (LENS-051)
Long Throw Zoom Lens (LENS-052)
Ultra Long Throw Zoom Lens (LENS-053)
Standard Zoom Lens for WUXGA (LENS-054)
Standard Zoom Lens for WXGA (LENS-055)
Glossy Black Skin Kit (TOP-05-GB)
Matte White Skin Kit (TOP-05-MW)
Walnut Skin Kit (TOP-05-W)
Primer Skin Kit (TOP-05-B)

For more information, please visit:
www.infocus.com/Accessories.aspx



DisplayLink™

Hassle-free, lightning fast-projection. DisplayLink content over USB technology eliminates the need for bulky VGA cables and allows for computer and image set up in seconds without toggling or cumbersome function key combinations. DisplayLink makes projecting simple!

Warranty

Providing the highest quality products and support is very important to InFocus. The new IN5500 series digital projectors come standard with a 5 year limited factory warranty (including parts¹ and labour²) a 1 year limited lamp replacement warranty and 5 year DLP warranty.

For more information, please visit:
www.infocus.com/Support/Warranty.aspx

IN5500 (SERIES) FEATURES

2-3 Pulldown
Auto Keystone
BrilliantColor
Cable Management System
Centred Lens
Closed Captioning
Custom Skins
DisplayLink Plug & Play (DDC2B)
DMS Dynamic Messaging System
Electrical H&V Keystone Correction
Freeze Frame with Magnifying Function
InFocus UI
LitePort™ USB JPEG Player
LiteShow Wireless Ready
LiteTouch™ Touchsense Keypad
Logo Capture
Low Power Standby (<1W)
Motorised Focus and Zoom
Motorised Lens Shift
Pincushion/Barrel Distortion Correction
ProjectorNet Web Browser Control
Sleep Timer
SNMP Capable
SplitScreen Dual Images
Top Lamp Access



InFocus
Bright Ideas Made Brilliant

www.infocus.com

INFOCUS CORPORATE HEADQUARTERS
13190 SW 68th Parkway
Portland, Oregon 97223-8368, USA
Phone: (1) 503-207-4700
Toll Free: (1) 877-388-8385
Fax: (1) 503-207-1937

INTERNATIONAL HEADQUARTERS
4 Teck Lim Road
Singapore 088382
Phone: (65) 6513-9600
Fax: (65) 6238-0535

©2010 InFocus Corporation. All rights reserved. Specifications are subject to change without further notice. InFocus and InFocus Bright Ideas Made Brilliant are either trademarks or registered trademarks of InFocus Corporation in the United States and other countries. DLP, the DLP logo, and the DLP medallion are trademarks of Texas Instruments. All trademarks are used with permission or are for identification purposes only and are the property of their respective companies.
¹Excludes power supply, fans, colour wheel and light tunnel which are covered for three (3) years.
²Labour is covered for three (3) years from date of proof of purchase.
InFocus_IN5500_New_DS_EU_13DEC10. Part Number: MMINFOCUS-0204

Specifications*

IN5533L **IN5535L**

| | |
|------------------------------|---|
| Native Resolution | IN5533L – WXGA 1280 × 800 IN5535L – WUXGA 1920 × 1200 |
| Maximum Resolution | WUXGA (1920 × 1200) |
| Display Technology - DMD | IN5533L – DLP .65" WXGA, DarkChip IN5535L – DLP .67" WUXGA, DarkChip |
| Brightness | 6000 ANSI lumens (dual lamp mode) 3150 ANSI lumens (single lamp mode) 2500 Hrs Eco Mode (2000 Hrs Normal) |
| Lamp Life** | 2000:1 Typical |
| Contrast Ratio | 29 db Eco Mode (30 db High Power) |
| Audible Noise | PC, MAC |
| Computer Compatibility | IN5533L Throw Ratio Zoom Ratio 1.52 ~ 2.03 1.33× 1.45 ~ 1.93 1.33× |
| Lenses | IN5535L Throw Ratio Zoom Ratio 0.81 0.77 1.27 ~ 1.52 1.2× 1.21 ~ 1.45 1.2× |
| Standard (LENS-055/054) | 2.03 ~ 3.85 1.9× 1.93 ~ 3.67 1.9× |
| Fixed (LENS-050) | 3.85 ~ 7.32 1.9× 3.67 ~ 6.97 1.9× |
| Wide Zoom (LENS-051) | Motorised |
| Long Zoom (LENS-052) | -50% to +10% |
| Ultra Long (LENS-053) | +/- 10% |
| Lens Shift Type | RGBWYC / 6 Segment |
| Lens Shift - Vertical | 1.07 Billion |
| Lens Shift - Horizontal | Native 16:10 (4:3, 5:4, 16:9 Supported) |
| Colour Wheel | 330 W per lamp |
| Number of Colours | Power Zoom, Power Focus |
| Aspect Ratio | 15 ~ 100 kHz (Video/PC) |
| Lamp Power | 50 ~ 85 Hz (Video/PC) |
| Zoom/Focus | NTSC / PAL / SECAM / PAL-M, N / NTSC4.43 |
| Synch - Horizontal Scan Freq | SDTV: 480i, 480p, 576i, 576p |
| Vertical Scan Freq | HDTV: 720p, 1080i, 1080p (60,30,24Hz) |
| Video Compatibility | 5 W x 2 |
| Audio | 15pin Dsub × 2, 5 BNC, DisplayLink, LitePort, |
| Input Sources | HDMI 1.3 × 2, Component × 1, S-Video × 1, Composite × 1, Stereo Mini × 2, RCA Stereo × 3 |
| Output Sources | 15pin Dsub × 1, Stereo-Mini Jack × 1 |
| Control | 2.5 mm Stereo Mini, Projector Keypad, IR Remote Control, USB, RS232, RJ45, Wired Remote |
| Accessories Power Jack | 10 W, 5 V, 2 A |
| Screen Trigger | 3.5 mm Mini 12 V DC 250 ma |
| Network | 10 BASE-T, 100 BASE-TX |
| Product Weight | 20.0 kg |
| Product Dimensions - W×D×H | 432 × 670 × 240 mm |
| Product Colour | Matte Black, Glossy Black, Matte White, Wood Grain, Primer for Customisation |
| Shipping Dimension - W×D×H | 991 × 594 × 330 mm |
| Shipping Weight | 26.0 kg |
| Maximum Altitude | 2286 m |
| Remote Control | Navigator - 3 |
| Ships With - Accessories | RGB Cable, Power Cord, USB Mini-B to A, Remote, Projector User's Guide |
| Menu Languages | English, French, German, Italian, Korean, Portuguese, Russian, Spanish, Traditional Chinese, Simplified Chinese, Norwegian, Swedish, Finnish, Danish, Dutch, Polish, Turkish |
| Lamp Rupture Containment | Tested to larger than 0.8 mm *** |
| Accessories Warranty | 90 days |
| Regulatory Models | F5530 |
| Approvals | UL60950-1/cUL (USA and Canada), FCC Part 15, Class A (USA), CE (Europe), NOM (Mexico), S-Mark (Argentina), GOST (Russia), KC (Korea), SAFETY Mark (Singapore), CCC, CECP (China), C-Tick (Australia/NZ) |
| Security | Kensington Lock |

* Product specifications, terms, and offerings are subject to change at any time without notice.

** Actual lamp life may vary based on the ambient environment and projector usage. Conditions that may affect lamp life include temperature, altitude, and rapidly switching the projector on and off.

*** Tested to contain particles larger than the specified size in any dimension