


InFocus LP610

INFOCUS LP610



Display Type	 1 x Chip DLP VGA 4/3 Ti Digital Light Processing Chip	
Ansi-Lumen	450	146 Lux (bei 203 cm Screen)
Contrast	-	-
Black Level	-	-
Offset	-	-
Resolution	VGA 640 x 480 307.200 Pixel	
Video Modes	NTSC M, NTSC 4.43, PAL B/G, SECAM M	
Application	Stationary Permanent installation in the training room and meeting room as well as the conference room. Very narrow picture width and rooms with very little light.	
Light Source	270W Metalllamp	
Light Life	Article Nr.: SP-LAMP-LP620 500 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual	
Objective	-	
Throw Ratio	-	
Audio	1W	
Connections	36-pin IEEE-1284 type connection. 1 x Mini jack in 1 X out Video Cinch in S-Video 2 x Cinch Stereo Subwoofer Output RCA Receptacle (Black) Mini Jack Audio out Wired Remote Input	
Ceiling Mounting	-	
Power	425W	
Size WxHxD	330 x 209 x 394 mm (13"x8,2"x15,5") 27,17 L/dm³	
Operating Noise	45dB	

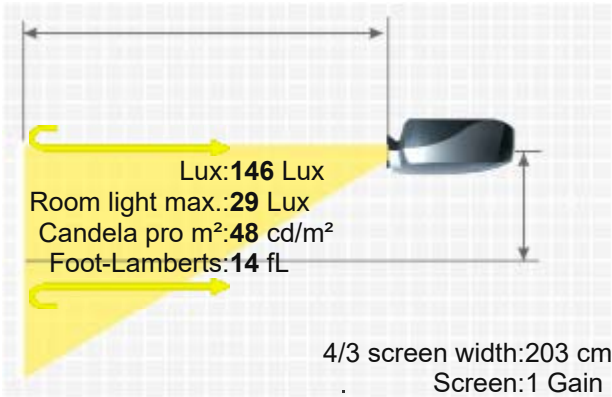

Weight 11,00 kg / 24,25 lbs.
Keystone -
Illumination -

Frequenz -

Foot-Lamberts 14 fL / max. 185 cm screen width
48 cd/m²
Features -

Optional	Philips bulb only	NLMPf2425
	Lamp ruby	Ruby-LMPf2425
	Lamp original	SP-LAMP-LP620
	Compatible lamp	LMP-Kf2423
	Universal Remote original	Fernb-uni-V3

Status
Data
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=nf2423>
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/infocuslp610-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.