

InFocus X8

INFOCUS X8



Brief Introduction

Beta 2.5

Display Type



1 x 0,65" LVDS DLP Chip
WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

1800

720 Lux (bei 200 cm Screen)

Contrast

1400:1 full on/off

1400:1 full on/off

Black Level

1,2857 min. Lumen

0,515 min. Lumen

Offset

Resolution

WXGA 1280 x 800

1.049.088 Pixel

Video Modes

SXGA+ 1400 x 1050 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

Articel Nr.: SP-LAMP-026

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,41-2,55 f=21,8-24 mm

Throw Ratio

1,95-2,15:1

Audio

3W Mono

Connections

DVI M1DA

D-sub 15 pin in und out

S-Video in


Cinch Video in

Mini Jack Audio in und out



Ceiling Mounting

Yes

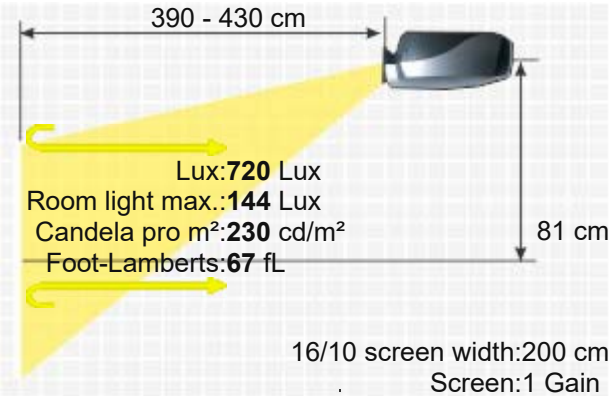

Power 272W
Size WxHxD 217,7 x 74,4 x 263,1 mm (8,6"x2,9"x10,4") 4,22 L/dm³
Operating Noise 36dB

Weight 2,30 kg / 5,07 lbs.
Keystone Vert.: +/-15°
Illumination 80%
Frequenz H-sync: 13,5-80 kHz
V-sync: 56-85 Hz
Range max.: 140 MHz
Foot-Lamberts 67 fL / max. 431 cm screen width
230 cd/m²

- Features
- Freeze
 - Blank (Black screen button)
 - Kensington Slot
 - Password protection
 - BrilliantColor™
 - Overscan adjustable
 - 6-segment colour wheel

In Test -

Lamp ruby	Ruby-LMP16364
Lamp original	SP-LAMP-026
Optional	
Compatible lamp	LMP-K16364
Universal Remote original	Fernb-uni-V3
Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d17910>
2007 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



<https://www.projector-database.com/pro/infocusx8-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.