

JAVES TLS 718

JAVES TLS 718



Brief Introduction

Beta 2.5

A brief introduction to the TLS 718: The JAVES standard portable LCD projector offers 1800 Ansi lumens, a contrast of 300:1 and an SVGA 800 x 600 resolution. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. 1800 Ansi lumens ensure that a picture width of 369 cm is also possible. However, if room light is available, the picture should be a maximum of 246 cm wide. The projector is very quiet compared to others with an operating noise of 30 decibels. This model is no longer offered by JAVES.

Display Type

3 x 0,7" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Ansi-Lumen

1800

600 Lux (bei 200 cm Screen)

Contrast

300:1 full on/off

300:1 full on/off

Black Level

6,0000 min. Lumen

2,02 min. Lumen

Offset

SVGA 800 x 600

Resolution

480.000 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Small screen width, rooms with very little ambient light below 100 lumens.

Light Life

200W Lamp

Operating Costs

-

Focus

Manual

Zoom

Manual 1,16

Objective

F=2,0-2,3 f=21,8-25,2 mm

Throw Ratio

1,53-1,77:1

Audio

-

Connections

D-sub 15 pin in
YUV in
S-Video in
Cinch Video in
RS232C

Ceiling Mounting

-

Power


-

Size WxHxD


255 x 106 x 329 mm (10"x4,2"x13") 8,89 L/dm³

Operating Noise

30dB

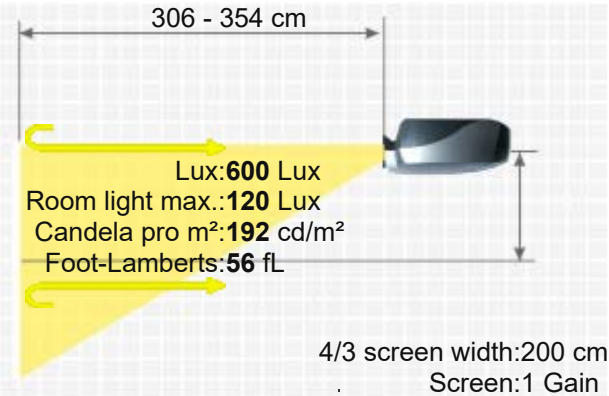

Weight 3,00 kg / 6,61 lbs.
Keystone Vert.: +/-15°
Hori.: +/-40°
Illumination 90%
Frequenz H-sync: 15-69 kHz
V-sync: 50-85 Hz
Foot-Lamberts 56 fL / max. 369 cm screen width
192 cd/m²
Features ■ Picture-in-Picture
■ Digital zoom
Status - Discontinued (EOL) // Last update of the data: 2023-08-04

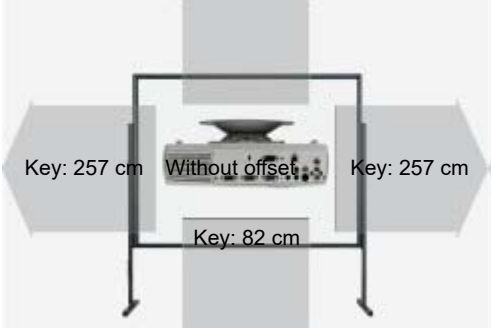

Data



More Details



HCinema

<https://www.projector-database.com/pro/javestls718-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.