


JVC DLA L20/U

JVC DLA L20/U



Brief Introduction

Beta 2.5

A brief introduction to the DLA L20/U: The JVC DILA projector offers 2000 Ansi lumens, a contrast of 350:1 and an SXGA+ 1365 x 1024 resolution. The projector also offers a lens shift function that makes image adjustment childs play. The projector can illuminate an image width of up to 389 cm thanks to its 2000 Ansi lumens. In room lighting, however, the picture width should ideally be less than 259 cm. This model is no longer available from JVC.



3 x 0,9" D-ILA Chip
SXGA 4/3 Direct-Drive Image Light Amplification (D-ILA)

Display Type

Ansi-Lumen

2000

667 Lux (bei 200 cm Screen)

Contrast

350:1 full on/off

350:1 full on/off

Black Level

5,7143 min. Lumen

1,922 min. Lumen

Lens shift

Vert.: +55% -30%

Resolution

SXGA+ 1365 x 1024
1.397.760 Pixel

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43 HDTV

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

550W Xenon Lamp
Articel Nr.: BHL-5003-SU

Light Life

1000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

-

Throw Ratio

-

Audio

2 x 1W

Connections

Analog RGB x 2 (D-sub 15pins (female) x 1, R, G, B,
H, V x 1)
Y/C separated x 1
Composite x 1
Component x 1 (Y/R-Y/B-Y, Y/PB/PR)
Output PC monitor: D-sub out
Audio: Stereo out

Ceiling Mounting

Yes

Power


850W

Size WxHxD

505 x 264 x 437 mm (19,9"x10,4"x17,2") 58,26 L/dm³

Operating Noise

53dB

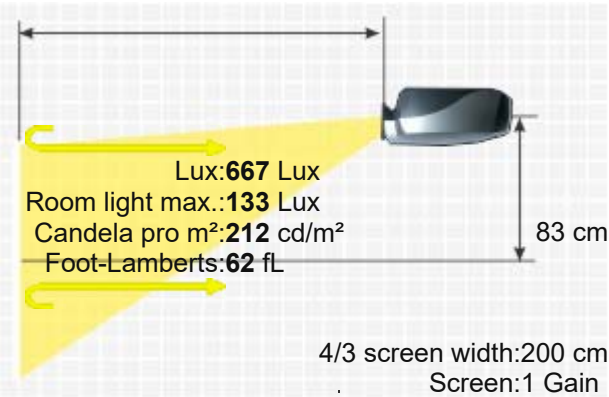


Weight 17,90 kg / 39,46 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-82 kHz
V-sync: 50-78 Hz

Foot-Lamberts 62 fL / max. 389 cm screen width
212 cd/m²

Features ■ Lens shift Funktion
■ Gamma correction
■ 10-Bit digital Gamma Correction

Status Data - Discontinued (EOL) // Last update of the data: 2023-08-04

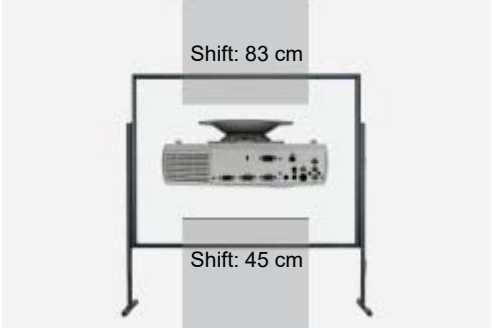

More Details



HCinema
<https://www.projector-database.com/pro/jvcdlal20-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.