

JVC DLA-RS4500 /K

JVC DLA-RS4500 /K



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The JVC DLA-RS4500 /K Laser DILA projector has 3000 Ansi lumens, a contrast of 12000:1 and a UHD (4K+2K) 4096 x 2160 resolution. Due to the laser, the projector is specified with 20000 hours of light life, which converts to over 13.7 years at 4 hours per day. The built-in lens shift function provides freedom when adjusting the projection. 3000 Ansi lumens ensure that a picture width of 366 cm is also possible. However, if room light is available, the picture should be a maximum of 244 cm wide. Playing 1080P and 4K is also no problem for the projector. It was launched in 2016 and is no longer offered by the manufacturer JVC.



3 x 0,69" D-ILA Chip

UHD 19/10 Direct-Drive Image Light Amplification (D-ILA)

Projector

3000 / 2400 im Eco Mode

12000:1 full on/off

0,2500 min. Lumen

Screen

Vert.: +/-100% Hori.: +/-43%

UHD (4K+2K) 4096 x 2160

8.847.360 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Laser

20000 h.

0,00 € Laser

Powered

Powered 2

-

1,4-2,8:1

-

2 x HDMI HDCP 2.2 in

RJ45 in

RS232C Din 9 pin

12V Trigger out

Yes

750W

500 x 215 x 720 mm (19,7"x8,5"x28,3") 77,4 L/dm³


40dB

Screen

1422 Lux (bei 200 cm Screen)


12000:1 full on/off

0,119 min. Lumen

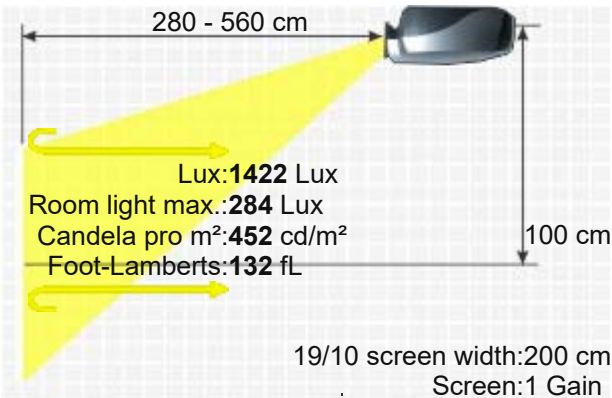

Weight 39,00 kg / 85,98 lbs.
Keystone -
Illumination -
Frequenz -
Foot-Lamberts 132 fL / max. 366 cm screen width
452 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Eco Mode
 - High Dynamic Range (HDR)
 - Lan network compatible.
 - THX certification

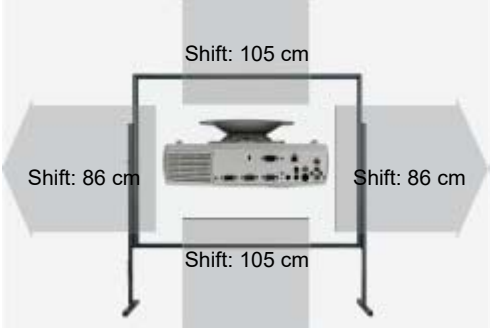

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
GL-MZ4014SZ	1.27-2.54:1	2.5-5.1 m	+/-100%	+/-40%	Powered
GL-MZ4009SZ	0.94-1.3:1	1.9-2.6 m	+/-50%	+/-18%	Powered
Fix Optional Lenses					
VSL-2012	1.18:1	2.4 m	0.00% Fix		No Zoom
VSL-2010	0.99:1	2 m	0.00% Fix		No Zoom

Status 2016 Discontinued (EOL) // Last update of the data: 2024-10-02
Created: 2016-09-16 14:20:12



More Details



HCinema

<https://www.projector-database.com/pro/jvcdlars4500-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.