

Kindermann KSD 160

KINDERMANN KSD 160



Brief Introduction

Beta 2.5

Display Type



1 x 0,55" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2200 / 1700 im Eco Mode

733 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,1000 min. Lumen

0,367 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W VIP Lamp

Articel Nr.: 8970

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=20,2-24,2 mm

Throw Ratio


1,8-2,2:1

Audio

1 x 2W

Connections

D-sub 15pin in und out
S-Video in
Cinch Video in
Mini Jack in
USB
RS232C

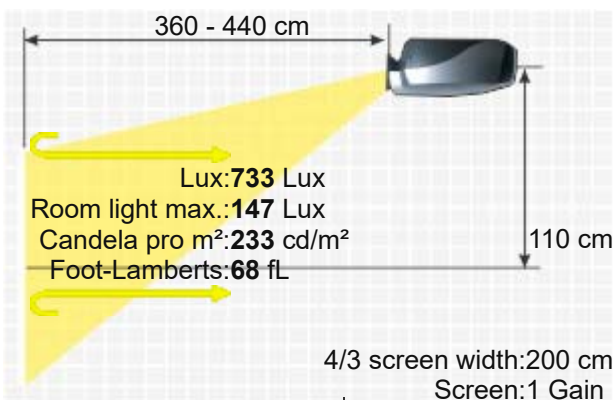



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
200W
265 x 97 x 202 mm (10,4"x3,8"x8") 5,19 L/dm³
32 / 30 dB in Eco Mode

Weight
Keystone
Illumination

2,20 kg / 4,85 lbs.
Vert.: +/-15°
80%

Frequenz

H-sync: 31-79 kHz
V-sync: 50-85 Hz

Foot-Lamberts

68 fL / max. 408 cm screen width
233 cd/m²

Features

■ Eco Mode
■ 4 segment colour wheel.

Optional

Lamp ruby
Lamp original

Ruby-LMP16057
8970

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d16057>
2005 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/kindermannksd160-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.