

Kokuyo KM P311S



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

The standard portable KM P311S DLP has 1100 Ansi lumens, a contrast of 600:1 and an SVGA 800 x 600 resolution. An image width of up to 289 cm is possible as the projector has 1100 Ansi lumens. However, if room light is available, the picture should be max. 193 cm wide. This model is no longer offered by Kokuyo.



1 x 0,7" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Projector

1100

600:1

1,8333 min. Lumen

356 Lux (bei 203 cm Screen)

600:1

0.596 min. Lumen

SVGA 800 x 600
480.000 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

120W VIP Lamp

1500 h.

-

Manual

Manual 1,19

F=2,6-3,1

-

1W Mono

D-sub 15pin in
S-Video in
Cinch Video in
Mini Jack in

-

185W

220 x 52 x 175 mm (8,7"x2"x6,9") 2 L/dm³

36dB

1,70 kg / 3,75 lbs.

-


-

H-sync: 20-88 kHz
V-sync: 20-100 Hz

33 fL / max. 289 cm screen width
113 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

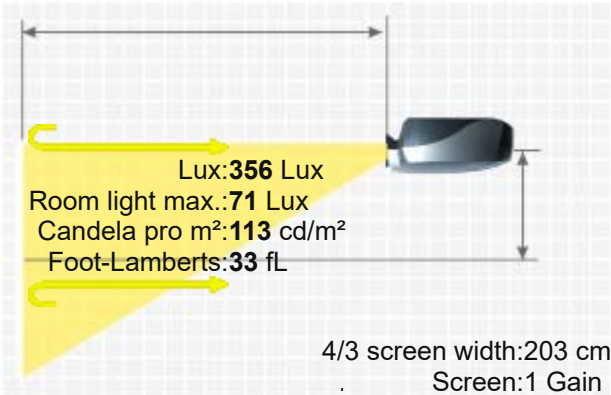

KOKUYO KM P311S



HCinema

<https://www.projector-database.com/pro/kokuyokmp311s-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.